


# High Pressure Tubing

Tubing is cold drawn, seamless, and is supplied in the  $\frac{1}{8}$  hard condition (not annealed). Tensile strength is approximately 40 percent higher than that of annealed tubing. All tubing is manufactured in strict accordance with High Pressure Equipment Company specifications to insure tolerances and bore quality. Tubing is stocked in lengths of 18 to 22 feet but may be ordered in shorter lengths with **no additional cutting charge**.

**Note:** The  $\frac{1}{16}$ " and  $\frac{1}{8}$ " O.D. tubing sizes may be coiled for shipment. Larger sizes must be shipped in straight lengths.

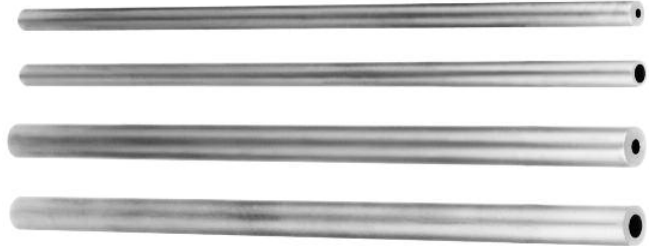

	Tubing Size	Working Pressure psi	Type of Connection Used	Material	Catalog Order Number
$\frac{1}{16}$ "	$\frac{1}{16}$ " O.D. x 0.006" I.D.	15,000	$\frac{1}{16}$ " TAPER SEAL (AF1)	316 SS	15-9A1-006
	$\frac{1}{16}$ " O.D. x 0.030" I.D.				15-9A1-030
$\frac{1}{8}$ "	$\frac{1}{8}$ " O.D. x 0.060" I.D.	15,000	$\frac{1}{8}$ " TAPER SEAL (AF2)	316 SS	15-9A2
$\frac{1}{4}$ "	$\frac{1}{4}$ " O.D. x $\frac{1}{8}$ " I.D.	10,000	$\frac{1}{4}$ " TAPER SEAL (AF4)	316 SS	10-9A4-316
				304 SS	10-9A4-304
$\frac{3}{8}$ "	$\frac{3}{8}$ " O.D. x $\frac{1}{4}$ " I.D.	10,000	$\frac{3}{8}$ " TAPER SEAL (AF6)	316 SS	10-9A6-316
				304 SS	10-9A6-304