




VALVES

# Flow Control Valves

BIS offer a comprehensive range of stainless steel shut-off and metering valves for use on a wide range of operating media.

The range includes shut-off valves intended for leak tight isolation and metering valves for flow or speed control, with and without reverse flow check functions.

Designs are available up to 1,379 bar (20,000 psi), with a large number of installation options, including in-line ported and cartridge style valves. New to the range, shut-off valves are now available in configurations that match industry standard porting layouts for medium pressure valves.

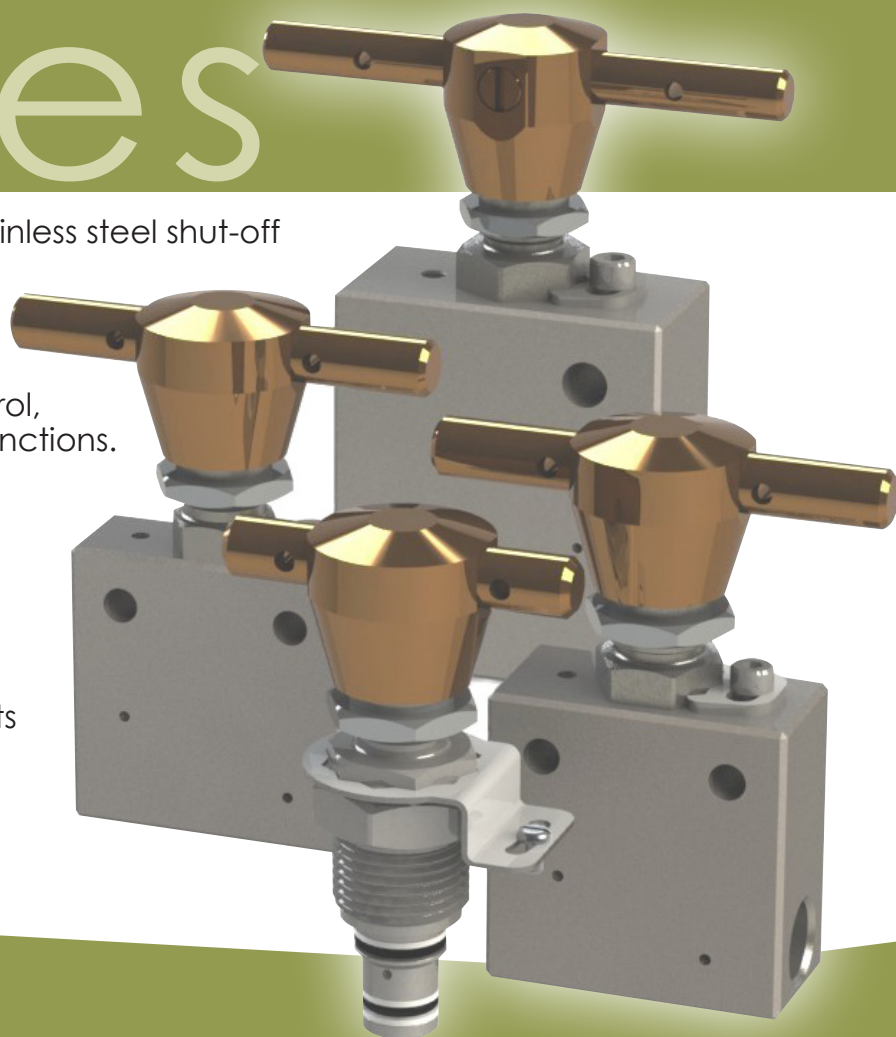

## Contacts

### BIS VALVES LTD

Unit 17 - 23, Kingfisher Park, West Moors, Wimborne, Dorset, BH21 6US, UK

Tel No: +44 (0)1202 896322

Email: [salesadmin@bisvalves.co.uk](mailto:salesadmin@bisvalves.co.uk)

Fax No: +44 (0)1202 896718

Web: [www.bisvalves.co.uk](http://www.bisvalves.co.uk)

## Global Distributors

See [www.bisvalves.co.uk](http://www.bisvalves.co.uk) for contact details



### Sergio Escada

Tel.: +55 21 2518-2555

Cel.: +55 21 99972-3948

[sergio.escada@palmtecnologia.com.br](mailto:sergio.escada@palmtecnologia.com.br)

[www.palmtecnologia.com.br](http://www.palmtecnologia.com.br)



[www.bisvalves.co.uk](http://www.bisvalves.co.uk)

	Nominal Size	Max Pressure*		Valve Type
Shut-Off Valves	1/8"	1,379 bar	(20,000 psi)	<b>BNV10</b> <b>BNV25</b> <b>BNV25/37</b> <b>BNV44AE</b> <b>BNV56AE</b> <b>BNV81AE</b>
	1/4"	862 bar	(12,500 psi)	
	3/8"	862 bar	(12,500 psi)	
	1/4"***	1,379 bar	(20,000 psi)	
	3/8"***	1,379 bar	(20,000 psi)	
	9/16"***	1,379 bar	(20,000 psi)	
Metering Valves	1/8"	552 bar	(8,000 psi)	<b>VFMF25/12</b> <b>VFMF25</b> <b>FMF25</b> <b>MF25</b> <b>MF37</b> <b>MF50</b> <b>MF75</b> <b>MF100</b>
	1/4"	552 bar	(8,000 psi)	
	1/4"	552 bar	(8,000 psi)	
	1/4"	552 bar	(8,000 psi)	
	3/8"	552 bar	(8,000 psi)	
	1/2"	552 bar	(8,000 psi)	
	3/4"	552 bar	(8,000 psi)	
	1"	552 bar	(8,000 psi)	
Metering with Check (micrometer adjustment)	1/4"	552 bar	(8,000 psi)	<b>CMF25</b> <b>CMF37</b> <b>CMF50</b> <b>CMF75</b> <b>CMF100</b>
	3/8"	552 bar	(8,000 psi)	
	1/2"	414 bar	(6,000 psi)	
	3/4"	414 bar	(6,000 psi)	
	1"	414 bar	(6,000 psi)	
Metering with Check (barrel adjustment)	1/4"	552 bar	(8,000 psi)	<b>IMC25</b> <b>IMC37</b> <b>IMC50</b>
	3/8"	552 bar	(8,000 psi)	
	1/2"	552 bar	(8,000 psi)	
Pressure Compensated Flow Control Valves	3/8"	690 bar	(10,000 psi)	<b>PCFR50/37</b> <b>PCFR50</b>
	1/2"	690 bar	(10,000 psi)	

# Flow Control Valves

## Shut-off Valves

- ☑ Stainless steel construction for use with a wide range of operating media
- ☑ Non-Rotating Stem Design to reduce seat galling
- ☑ Elastomeric stem seals eliminate need to tighten glands
- ☑ Available with in-line ports, cartridge style for manifold installation, and with industry standard port layouts to suit medium pressure tubing applications

## Metering Valves

- ☑ Micrometer or barrel style adjustment for accurate flow control
- ☑ Very fine (VFMF) and fine (FMF) metering control options
- ☑ Models available with integral check valve for uni-directional metering
- ☑ Pressure compensated models provide constant flow with variable pressure differentials

