

ABO valve

we make processes work

PALM
Tecnologia em Alta Pressão

+55 21 2518-2555

+55 21 99972-3948

admin@palmtecnologia.com.br

www.palmtecnologia.com.br



CHECK VALVES

DUAL PLATE CHECK VALVES SERIES 700

Nominal size DN20

Working pressure 10 bar

Flange connection PN10

Working temperature -25°C / +125°C

Working media Clean water / Soil water
/ Thick and viscous liquids



DUAL PLATE CHECK VALVES SERIES 700 HP

Nominal size DN50 - DN600

Working pressure 10 bar / 16 bar

Flange connection PN10 / PN16 / PN25

Working temperature -25°C / +125°C

Working media Pure water / Waste water /
Oil & gas



SWING CHECK VALVES SERIES 800

Nominal size DN50 - DN300

Working pressure 10 bar / 16 bar

Flange connection PN10 / PN16

Working temperature -25°C / +125°C

Working media Waste water / Pure water / Heating
systems / Soil water / Oils /
Thick and viscous liquids



SERIES 700 / 800



www.abovalve.com

DUAL PLATE CHECK VALVES SERIES 700

Czech Industrial Valve Manufacturer

Basic properties

- § compact valve
- § preferred vertical installation in the pipeline
- § short face to face connection with good hydraulic performance
- § mounting between flanges
- § low pressure drops during medium flow rate

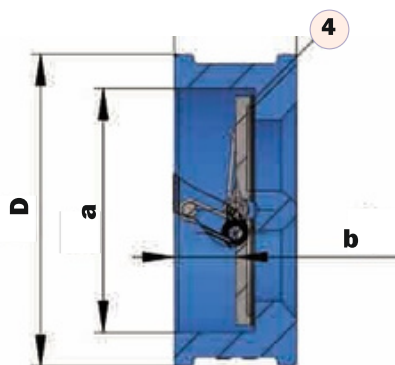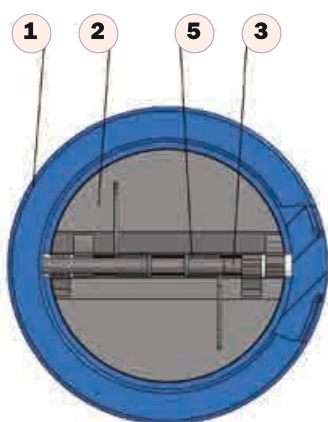

2 / ABO valve Czech

Standards

Leak test	ČSN EN 12266-1, Class A ISO 5208, Class A
Face to face length	ČSN EN 558
Flange connection	ČSN EN 6708 EN 1092-1,2
Working standard	EN 12334
Marking	EN19

Material performance

1	Body	Ductile iron 0.7040 (GGG40)
2	Disc	Stainless steel 1.4308 (CF8)
3	Stem	Stainless steel 1.4301 (AISI 304)
4	Seat	NBR (-10°C / +100°C) EPDM (-25°C / 125°C)
5	Spring	Stainless steel 1.4301 (AISI 304)

Basic dimensions

DN		L	PN10	PN16	a	b	r	kg
mm	inch		D	D				
50	2"	43	107		46	7,6	28,8	1,5
65	2 1/2"	46	127		58	12,9	33	2,4
80	3"	64	142		66	14	40	3,8
100	4"	64	162		94	23	53,1	4,7
125	5"	70	192		120	32,8	65,7	6,3
150	6"	76	218		144,6	42,6	78,6	9,3
200	8"	89	273		198	67,4	104,4	15,2
250	10"	114	328		244	72	127	26
300	12"	114	378	388	283,9	100	148,3	40,7
350	14"	127	438	444	333	121	172,5	55
400	16"	140	489	495	381	136,8	197,5	75
450	18"	152	539	555	420	147,7	217,8	118
500	20"	152	594	617	475,3	179,5	244,6	173
600	24"	178	695	734	585	220	301,5	200
700	"	229	810	804	690	250	352	260
800	28"	241	917	911	780	290	395	340
900	"	241	1017	1011	850	332	445	520
1000	36"	300	1124	1128	940	332	483	760
1200	"	350	1341	1342	1150	442	601	1200

Dimensions are mentioned in mm.

DUAL PLATE CHECK VALVES SERIES 700 HP



Basic properties


- § max. operating pressure up to 24 bar
- § high-performance dual plate check valve
- § long-life and trouble-free maintenance
- § compact design
- § light weight thus easier handling and self supporting
- § no external devices requirement
- § same valve can be installed vertically or horizontally



Standards



Leak test	ČSN EN 12266-1, Class A *) ISO 5208, Class A API 598, Table 5
Face to face length	API 594
Flange connection	ASME B16.5
Working standard	ASME B16.34
Marking	EN19

*) for tightness rate A, please consult with manufacturer

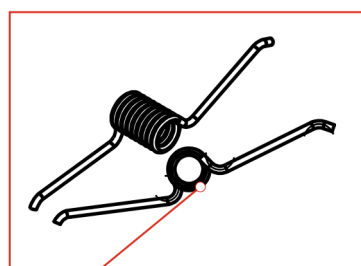


Spring loading on the plate assists valve closing ensure tight seal and minimize slamming.


Pin retaining plugs fitted with graphite gasket for riresafe and leak free seal.

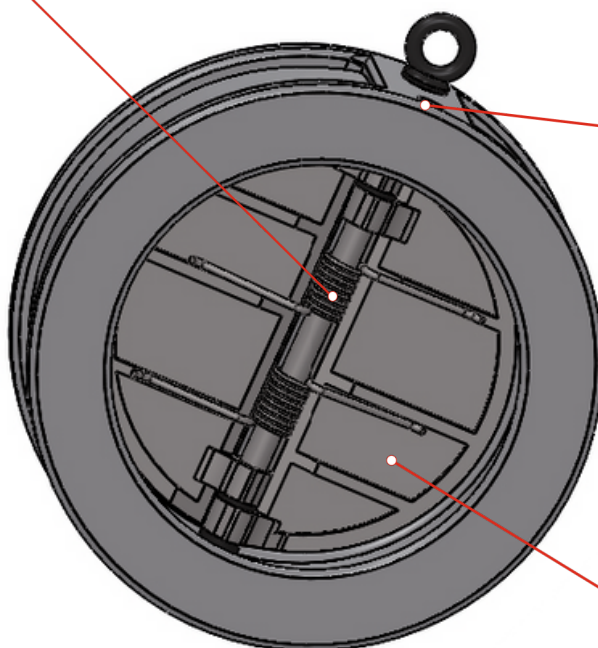

Dual plate design minimized valve cracking pressure and reduced valve pressure drops.

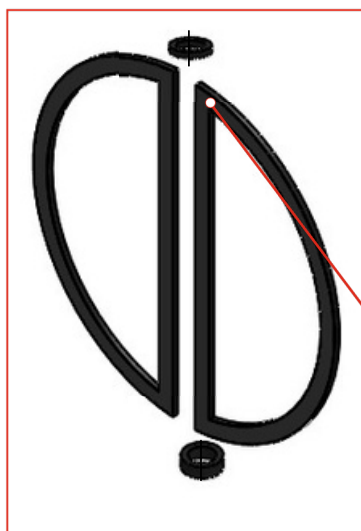

Dual plate design minimized valve cracking pressure and reduced valve pressure drops.

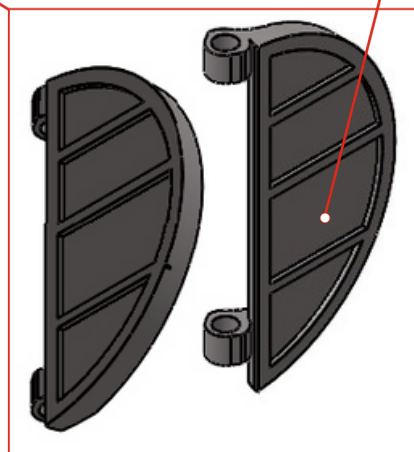


DUAL PLATE CHECK VALVES SERIES 700 HP

Czech Industrial Valve Manufacturer

Material performance

1	Body	ASTM B148 C95800
2	Disc	ASTM B148 C95800
3	Spring	Inconel X750
4	Bearing	ASTM B148 C95800
5	Stem	Monel 400
6	Seat	Lintegral

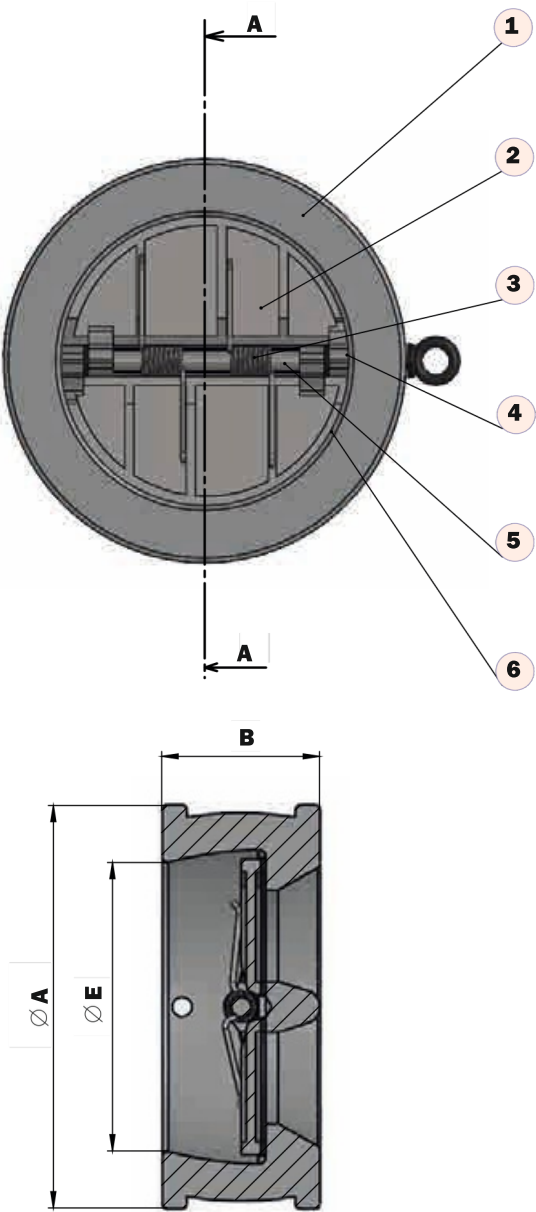

Basic dimensions

DN		A	B	E	Kg
mm	inch				
50	2"	104	60	40	2,5
65	2"1/2	123	66	60	3
80	3"	136	73	75	4
100	4"	174	73	90	6,5
125	5"	197	85	120	10
150	6"	222	98	145	12
200	8"	279	127	175	25
250	10"	339	146	240	32
300	12"	409	181	295	57
350	14"	450	184	350	85
400	16"	514	191	380	128
450	18"	549	203	425	131
500	20"	606	219	495	198
600	24"	717	222	590	260



Dimensions are mentioned in mm.

SWING CHECK VALVES SERIES 800



Basic properties

- § simple design and easy assembly
- § direct installation between DIN flanges
- § short construction length
- § low weight, easy manipulation

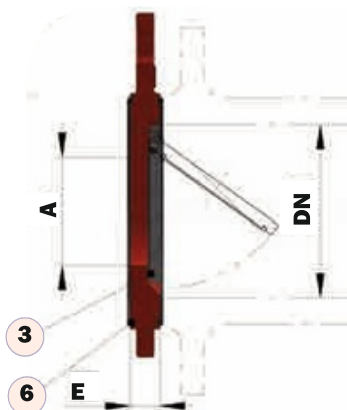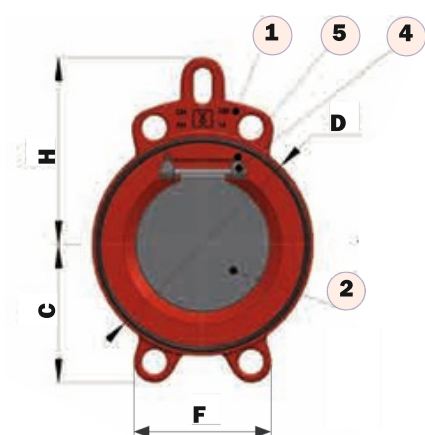

Standards

Leak test	ČSN EN 12266-1, Class A ISO 5208, Class A
Flange connection	EN ISO 6708 EN 1092-1,2 EN 12334
Working standard	EN 12334
Marking	EN19

Material performance

1	Body	Ductile iron 0.7040 (GGG40)
2	Disc	Stainless steel 1.4308 (CF8)
3	Seat	NBR (-10°C / +100°C) - marking 814 EPDM (-25°C / 125°C) - marking 824
4 5	Holder	Stainless steel 1.4308 (CF8)
6	Bolt	Stainless steel 1.4301 (AISI 304)
Flange sealing		Special seats - Viton / Silicon - upon request. Elastomer

Basic dimensions

DN		A	C	D	E	F	H	Kg
mm	inch							
50	2"	22	64	99	18	130	125	1,3
65	2 1/2"	38	72	118	20	142	135	1,8
80	3"	44	93	132	20	150	142	2,3
100	4"	70	107	158	20	112	157	2,6
125	5"	95	119	184	22	120	169	3,5
150	6"	114	133	212	22	137	185	4,5
200	8"	140	166	268	22	159	214	7
250	10"	185	198	319	29	141	246	12
300	12"	216	234	370	38	162	284	21,5

Dimensions are mentioned in mm.



USA

ABOControls LLC

Houston

tel.: +(1) 832.291.4929

sales.us@abovalve.com

