

ABO valve
Industrial Valve Manufacturer

PALM
Tecnologia em Alta Pressão

+55 21 2518-2555

+55 21 99972-3948

admin@palmtecnologia.com.br

www.palmtecnologia.com.br



CONCENTRIC BUTTERFLY VALVES

Body design WAFER type with through holes
LUG with threaded holes

Nominal size DN32 - DN150

Working pressure 6 bar / 10 bar / 16 bar

Flange connection PN6 / PN10 / PN16 / Class 151

Working temperature -10°C / +125°C

Working media Potable water
Hot water
Air conditioning
Air
Natural gas

Gas version PS6 / -10°C / +90°C

Tightness Class A

Features **Concentric design**
Pin body version
Gas version
Possible control
by float



SERIES 600

economy line

www.abovalve.com

GENERAL VALVE DESCRIPTION / DESIGN MODELS

Industrial Valve Manufacturer

Interflanged concentric butterfly valves Series 600

are used at various

industries like:

- potable water treatment and production
- heating, distribution of hot water
- ventilation
- air conditioning
- natural gas
- propane and butane gas (bottle gas)
- coal gas



Basic properties

- concentric design
- split stem
- pressed connection (for brass disc)
- body long neck according to the regulations of thermoprocessing equipment
- red epoxy coating according to RAL 2002 - 80 µm

Quality control

- manufacturing at ABO valve is certified according to quality control standard ISO 9001:2015 (14001, 45001)
- leak tests according to standards: ČSN EN 12266-1, ISO 5208, ANSI/FCI 70-2
- production in accordance with the Pressure Equipment Directive 2014/68/EU (Module H)
- manual actuation, if delivered, is adjusted and tested during assembly
- all certificates are downloadable from www.abovalve.com

Type designation

6 1 0 B G 100

Nominal size

DN32 - DN150

Gas valve performance

G

Body design

B - Waferbody type with through holes

T - Lug body type with threaded holes

Disc material

0 - Brass 2.0402

2 - Stainless steel 1.4308 (CF8)

3 - Ductile iron 0.7040 (GGG40)

with epoxy coating

4 - Stainless steel 1.4408 (CF8M)

Seat material

1 - NBR

2 - EPDM

Series name

Series 600

Standards

Leak test

EN 12266-1, Class A

ISO 5208, Class A

EN 558, Series 20

ISO 5752, Series 20


EN 1092-1

EN ISO 5211

Face to face length

Flange connection

Top flange

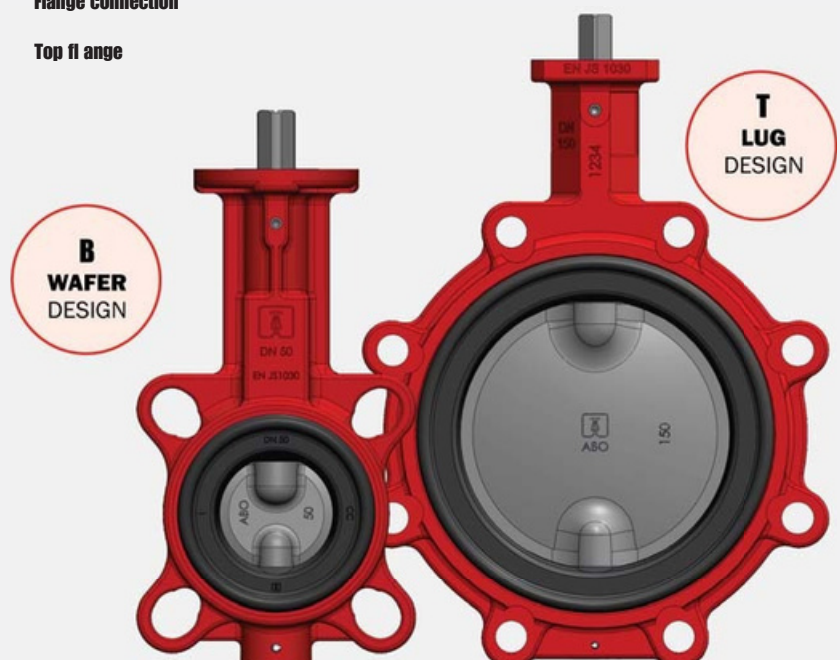

DESIGN ADVANTAGES



1. Top flange

- according to the standard ISO 5211 enables to directly mount any manual actuator

2. Blow-out proof shaft system

- a retaining bolt disables stem movement upwards

3. Valve long neck

- enables to use insulation and protects control elements on the ISO flange. The design meets requirements on heating system fittings.

4. Stem support at two points

- makes easier valve operation

5. Double side profile

- eliminates a risk of immobilisation after a longer shut-down

6. Split stem

- with the split stem valves reach better Kv/Cv values and thus a low pressure loss

7. Special seat shape

- closely fits to the stem and the pivot

8. Seat and body alignment

- enables a correct seat position and fixes the seat in the body; thus prevents the seat to slip out from the body while opening or closing the valve

9. Surface treatment


- epoxy coating 80 µm

10. Retaining pin

- prevents against stem blow-out

MATERIAL PERFORMANCE / FLANGE CONNECTION

Industrial Valve Manufacturer

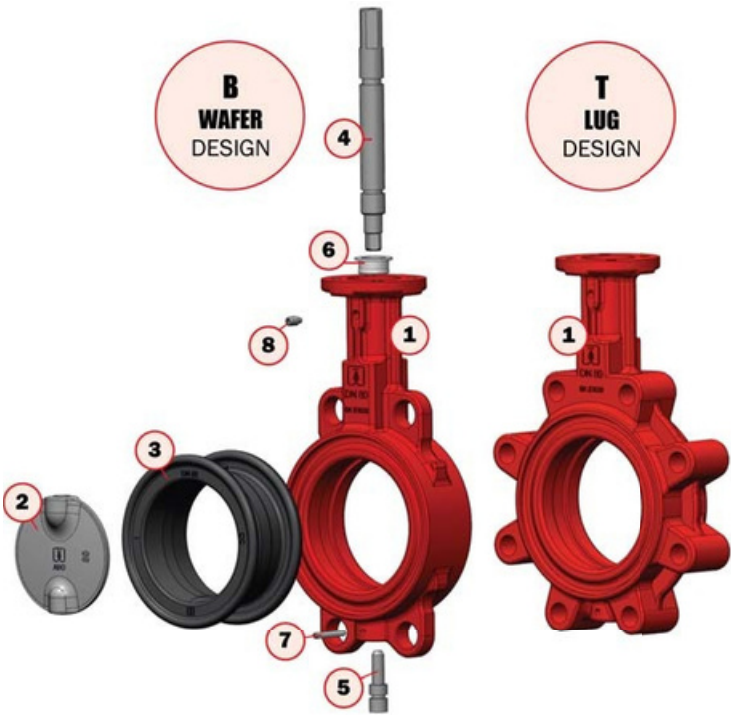

Item	Name	Material
1	Body - „B” *) (WAFER type)	DN32/40 Ductile iron 0.7040 (GGG40) epoxy coated DN50-DN150 Grey cast iron 0.6025 (GG25) epoxy coated
2	Disc	0 - Brass 2.0402 2 - Stainless steel 1.4308 (CF8) 3 - Ductile iron 0.7040 (GGG40) (epoxy coated) 4 - Stainless steel 1.4408 (CF8M)
3	Seat	1 - NBR 2 - EPDM Stainless steel 1.4021 (AISI 420)
4	Stem	Pivot Stainless steel 1.4021 (AISI 420)
5	Bushing	Delrin
6	Flexible pin	Stainless steel A2
7	Adjusting bolt	Stainless steel A2
8		

*) Body „T” (LUG type): **DN32/40-DN150**
Ductile iron 0.7040 (GGG40) epoxy coated

Installation between flanges

	DN	32/40	50	65	80	100	125	150
	NPS	1 1/4" - 1 1/2"	2"	2 1/2"	3"	4"	5"	6"
B	PN6							
	PN10							
	PN16							
	Class 150							
T	PN6							
	PN10	•	•	•	•	•	•	•
	PN16							
	Class 150	•	•	•	•	•	•	•

For JIS 5K/10K, please consult with ABO.

Standard

•

On request

Working conditions

working pressure	Seat temperature ratings
16 bar (max.)	Seat EPDM: -10°C upto +125 °C*)
	Seat NBR: -10 °C up to +90 °C

*) at medium temperature above 120°C
is the max. allowed pressure reduced from
16 bar to 14,4 bar and from 10 bar to
9 barO.


VALVE ACTUATION



ABO valve

Manual lever

For manual actuation ABO offers an aluminium lever suitably coated to improve abrasion and shock resistance.

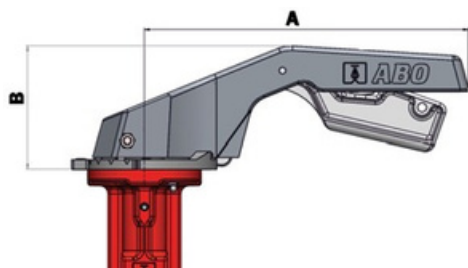

DN	32 - 80	100 - 150
NPS	1 1/4" - 3"	4" - 6"
A	200	275
B	76	76
Weight (kg)	0,35	0,4


Dimensions are declared in mm.

Worm gear with handwheel

Manual gearbox casing is made from cast iron with suitable surface treatment and protection degree class IP 67. Self-locking design of the worm gear enables both to set basic positions open/shut and to control (throttle) media flow. The worm gearbox is simply controlled handwheel of a suitable diameter. End positions of the worm gearbox are adjusted by screws. The gearbox can be equipped with a lockable system secured by a padlock. The worm gearbox as well as the hand lever can be completed with limit switch boxes

DN	32 - 150
NPS	1 1/4" - 6"
A	70
B	35
C	91
D	38
E	84
F	100
Weight (Kg)	1,2

Dimensions are declared in mm.

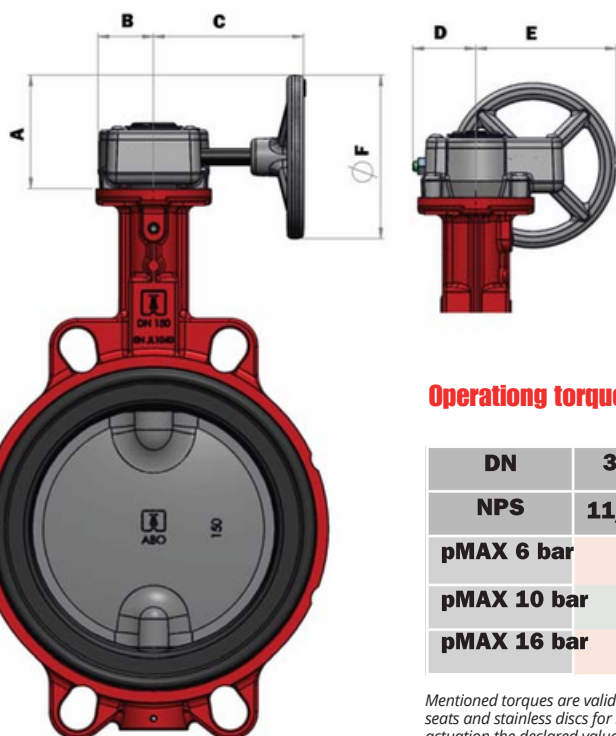

Operationg torques (Nm) vs. working pressure (bar)

DN	32/40	50	65	80	100	125	150
NPS	1 1/4"-1 1/2"	2"	2 1/2"	3"	4"	5"	6"
pMAX 6 bar	6	7	11	17	28	38	85
pMAX 10 bar	9	10	15	22	37	44	98
pMAX 16 bar	12	14	24	33	44	58	130

Mentioned torques are valid only for valves with EPDM seats and stainless discs for liquid media. For valve actuation the declared values must be multiplied by 1,2. For NBR seats to be multiplied by 1,4. For gas media or media with abrasive particles use secondary coefficient 1,35. For VITON (FPM) seats multiply by 1,4. For specific work conditions contact manufacturer to get advise for the actuation.



27

www.abovalve.com /5




VALVE BASIC DIMENSIONS

Industrial Valve Manufacturer

T
LUG
DESIGN

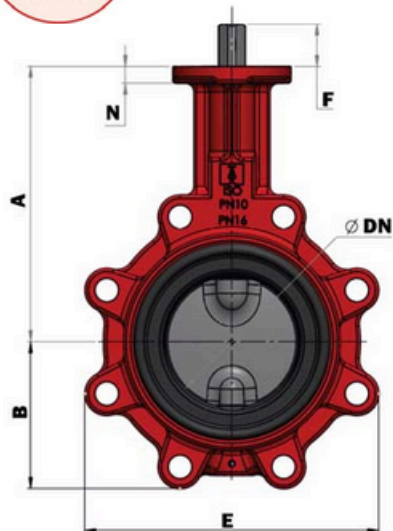

B
WAFLER
DESIGN

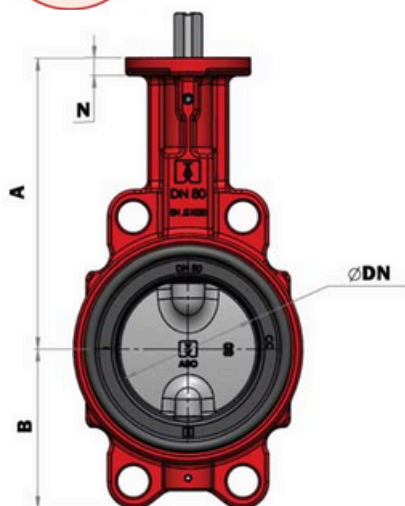

	DN	32/40	50	65	80	100	125	150
	NPS	1 1/4"-1 1/2"	2"	2 1/2"	3"	4"	5"	6"
	A	136	146	153,5	163	172,5	192,5	205
	B	54	64	72	89	100	112	128
	C	33	43	46		52	56	
	D	78	96	113	128	150	184	212
	E	110	116	131	173	192	235	258
Stem end ISO	F	25						
	G	14						
Top flange	I							
	J	50/70	50			70		
	K	4						
	L	7/9	7			9		
	M	-	7 0			-		
	N	70	-			105		
Flange dimensions	Ver. B	8					9,5	
	Ver. T	1,9	2,7	3,2	3,7	4,7	6,7	9,4
		2,3	3,0	3,7	4,8	6,1	9,2	10,2
ISO flange		F05/F07	F05				F07	

Dimensions are mentioned in mm.

VALVE GAS DESIGN



ABO valve

**For natural gas, propane and butane
and coal gas**



an economy ABO valve gas version is offered (is not designed for biogas). The valves of Series 600 designed for gas are suitable for pipelines and pump stations. The gas valves are simply recognizable: actuation lever is distinctly marked yellow and the valve body is marked with a series label with a „G“ letter. This valve is offered with special set of O-rings.

Installation between flanges

	PN6	PN10	PN16	Class 150
B				
T	•			•

Standard


On request

Working conditions

Working pressure	Seat temperature rating
6 bar max.	Seat NBR: -10°C / +90°C

Material performance

Item	Name	Material
1	Body	DN32/40 Ductile iron 0.7040 (GGG40) epoxy coated DN50-DN150 Grey cast iron 0.6025 (GG25) epoxy coated
2	Disc	0 - Brass 2.0402 1 - Aluminium bronze 2.0975 2 - Stainless steel 1.4308 (CF8) 3 - Ductile iron 0.7040 (GGG40) (epoxy coated) 4 - Stainless steel 1.4408 (CF8M)
3	Seat Stem	1 - NBR
4	Pivot Bushing	Stainless steel 1.4021 (AISI 420)
5	Flexible pin	Stainless steel 1.4021 (AISI 420)
6	Adjusting bolt	Delrin
7	O-ring	Stainless steel A2
8		Stainless steel A2
9		NBR

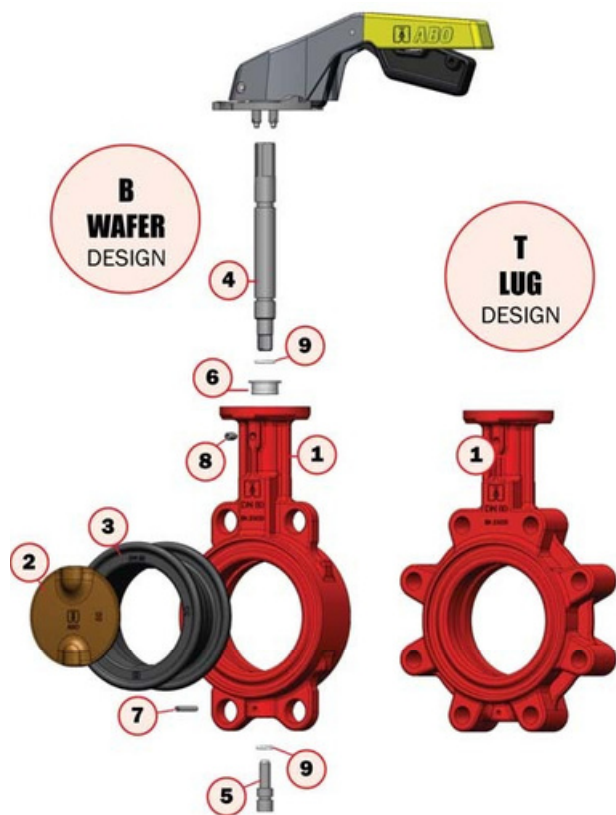

Basic properties

- nominal diameter DN32- DN150
- concentric design
- suitable for shut-off and regulating
- split stem
- BG version with through holes
- TG version with threaded holes


www.abovalve.com /7

FLOAT CONTROLLED VALVE

Industrial Valve Manufacturer

Manual lever

Valve disc fits concentrically on a stem and a pivot. The stem is assembled in slide bearings, the lower pivot is fixed in the body. The float closes (opens) the valve when the level rises (sinks). Lift is limited by end bolts.

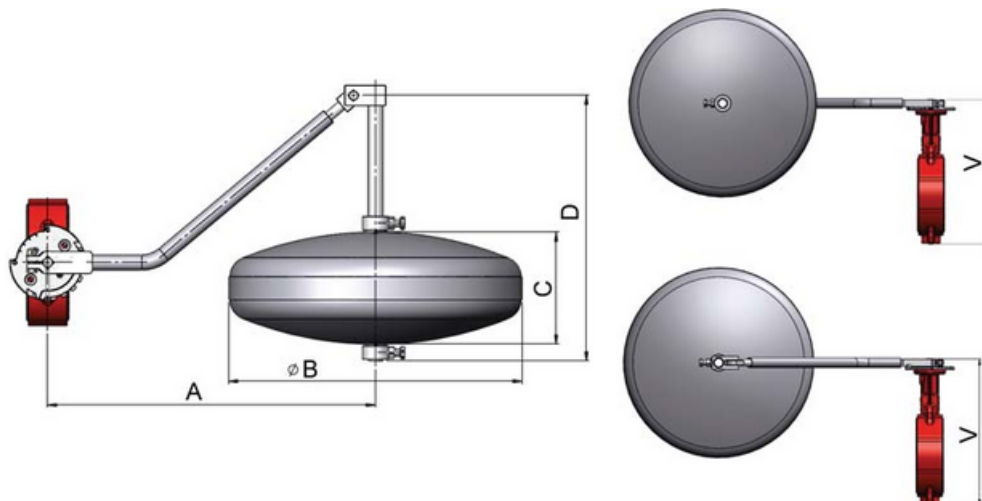

Assembly and maintenance

- valve can be mounted in horizontal and vertical pipes between flanges
- valve stem must always be in horizontal position
- float must always move in vertical direction

Use

- float valves are used as shut-off elements for automatic control of liquid inflow or outflow into/from reservoirs according to current level height. For water or other non-aggressive liquid media at temperatures of up to 100 °C.

DN	32/40	50	65	80	100	125	150
NPS	1 1/4"-1 1/2"	2"	2 1/2"	3"	4"	5"	6"
A	300			500		1000	
B	476						
C	240					310	
D	1035					1550	
V	215	235	250	273	303	333	356
Weight (kg)	10	11	12	12,5	13	18	19,5
Float volume (l)	25					35	

Czech Republic

ABO valve, s.r.o.
Dalimilova 285/54
783 35 Olomouc
tel.: +420 585 224 087
sales@abovalve.com

Slovak Republic

ABO Slovakia, s.r.o.
Banská Bystrica
tel.: +421 947 902 862
sales.sk@abovalve.com

Germany

ABO Armaturen GmbH
Essen
tel.: +49 (0)152 262 29501
sales.de@abovalve.com

USA

ABO Controls LLC
Houston
tel.: +1 (832) 291 4929
sales.us@abovalve.com

Ukraine

ABO Ukraine LLC
Dnipro
tel.: +38 056 733 95 70
sales.ua@abovalve.com

Turkey

ABO Armaturen LTD STI
Istanbul
tel.: +90 216 527 36 34
sales.tr@abovalve.com

Russia

ABO Armatura LLC
Smolensk
tel.: +7 (4812) 240 020
sales.ru@abovalve.com

India

ABO Controls Pvt. Ltd.
Mumbai
tel.: +91 773 820 4779
sales.in@abovalve.com

Singapore

ABO Valve Pte. Ltd.
Singapore
tel.: +65 9169 4562
sales.sg@abovalve.com

China

ABO Flow Control
Shanghai
tel.: +86 136 01 522 831
sales.cn@abovalve.com

United Arab Emirates

Salesrepresentation
Abu Dhabi
tel.: +971 56 9207964
bhar ti@abovalve.com

Bahrain

Salesrepresentation
Manama
tel.: +973 3444 9065
jimmichen@abovalve.com



Follow us on:



www.abovalve.com



The technical information described in this leaflet is tentative and for general use only and does not constitute a recommendation or guarantee for any specific service or application requirement. Please consult ABO representative or factory for specific requirements and material selection for your intended application. The right to change or modify product design or product without prior notice is reserved. ABO valve accepts no liability for damages caused by bad interpretation or use of the information included in this brochure.
Valid from 2/2023

8 / ABO Valve Czech