



#### Welcome to BiS Valves

BiS is an internationally recognised company with over 40 years experience in the design and manufacture of a wide range of small bore stainless steel pressure and flow control valves for high pressure liquid and gas.

Operating in a variety of sectors, we are a leading supplier to the Offshore Oil and Gas industry for topside, subsea and downhole applications where quality, reliability and safety are critical.

With an extensive range of standard products and a bespoke design service we aim to provide the right solutions for your applications.


#### Markets

the more exotic, such as inconel or titanium, we pride ourselves and special testing through external facilities when required. on finding the right solution, whatever the application. As a supplier to the oil and gas topside market, our products are widely specified for use on a range of applications including hydraulic power units, work over control systems and chemical injection systems. As a solution provider, BiS also designs, manufactures and supplies complete integrated manifolds to meet our customers' specific requirements. BiS Valves also has extensive experience providing products for subsea and Customer Care downhole applications such as wellhead control, emergency Ina competitive market place we recognise the importance of process control.

#### Technology

BiS has a strong profile and presence in the international offshore Alongside our large range of standard products, BiS has the oil and gas market in both topside and subsea applications, capability to design and manufacture the special product that is Products are designed mainly for the low flow, high pressure the perfect fit for your system. Using our experience of fluids, control valve market where demands for higher pressures and materials and seals, our team of hydraulics engineers use control valve market where demands for higher pressures and total reliability in the most extreme environments constantly push Designs can be qualified for use via in-house test facilities which design boundaries. Working with materials from stainless steel to can include flow, pressure, environmental and hyperbaric testing,

shut-down and remotely operated vehicles. Our strong design customer care, whether your requirement is for a single valve from team backed up with the latest test equipment is well suited to our standard range, large quantities of multiple products for a development of the bespoke products often required for subsea specific project, or for a bespoke design. Our team constantly applications. Our standard, cartridge and manifold mounted flow strive to provide customers with a prompt, efficient service, and pressure control products are also suited to and specified in a competitive lead times, on-time deliveries, and products wide range of industries, including water hydraulics, fuel designed, manufactured, assembled and tested in accordance distribution, metal manufacturing, industrial gas control and with strict quality control procedures. We enjoy a reputation for short lead times and our flexible manufacturing methods give us the capability to respond to your most urgent requirements.

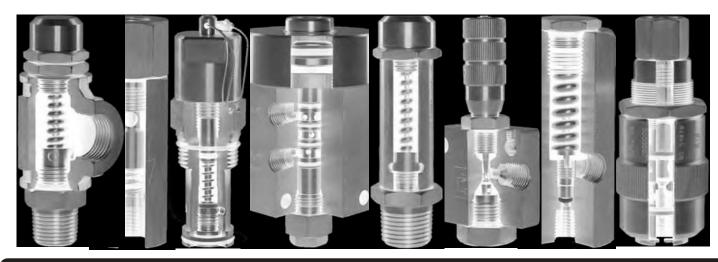

#### Usina This Catalogue

The data sheets in this catalogue are intended to provide the information necessary to specify product model numbers for the majority of applications. However, at BiS Valves we understand that every application is different and our team are always

available to assist with product selection. The data sheets should always be read in conjunction with the Application No contained in this catalogue.

#### Cannot see the product you need?

Our current standard range teatures a large number of carefully selected products but does not represent all the professional forms. available from BiS Valves. If there is an item that is not shown in this catalogue, please e-mail or call our Sales team and will do our utmost to help you.

#### Contact Us

Telephone

+44 (0) 1202 896322

We are here toprovideyouwith advice and support. Simply call us on +44 (0) 1202 896322 and be directed to our Sales department. Orders can be placed from 8:00am to 5:00pm Monday to Thursday and 8:00am to 4:00pm Fridays.

+44 (0) 1202 896718

Sendyourpurchaseorderorquoterequestby fax 24 hours a day, 7 days a week

E-mail

salesadmin@bisvalves.co.uk

Toplaceanorder, requestaquotation or to ask a question, why not e-mail?

Online

www.bisvalves.co.uk

Viewthelatestproductrangeonourwebsite, request a quotation or ask a question

Post

BiS Valves Ltd.

Units17-23Kingfisher Park, Collingwood Road, West Moors, Wimborne, Dorset, BH21 6US, UK

Global Partners Based in strategic locations around the world with local expertise and stocks of the most popular products, our Global Partners are ready to take your call.

Visit our website to find your local partner.

#### Important Notes

- 1. Full terms and conditions of sale are included at the back of the catalogue.
- 2. Every effort has been made to ensure that the contents of this catalogue are accurate. No liability will be accepted by BiS Valves for any errors or omissions.
- 3. BiS Valves operate a policy of continuous improvement and reserves the right to modify any part of the design of its products without prior notice. For any piece of equipment where specifications or dimensions are considered critical, it is recommended to contact our Technical Department for the latest details. The products should be installed and used by a qualified personnel familiar with the risks associated with pressure equipment and in compliance with the local regulations in a qualified personnel familiar with the risks associated with pressure equipment and in compliance with the local regulations in a qualified personnel familiar with the risks associated with pressure equipment and in compliance with the local regulations in a qualified personnel familiar with the risks associated with pressure equipment and in compliance with the local regulations in a qualified personnel familiar with the risks associated with pressure equipment and in compliance with the local regulations in a qualified personnel familiar with the risks associated with pressure equipment and in compliance with the local regulations in the risks associated with pressure equipment and in compliance with the local regulations in the risks associated with pressure equipment and in compliance with the local regulations in the risks associated with pressure equipment and in compliance with the local regulations in the risks associated with pressure equipment and in compliance with the local regulations in the risks associated with pressure equipment and in compliance with the local regulations in the risks associated with the local regulations and the risks associated with the risks as the risk as the
- force, and any installation, operation and maintenance instructions supplied with the product.

5.

6. BiS Valves will offer all possible assistance to ensure correct product selection, but it is the ultimate responsibility of the customer to ensure that the final product selection is suitable for the intended application.










#### Introduction

BiSValvesofferanextensive range of flow control valve products, in cartridge, manifold mounted and ported installation formats.


#### Stop Valves

hydraulic and pneumatic circuits contain stop valves as a critical part of the functionality. Typical applications include isolation of hydraulic circuits or components, providing a method of releasing pressure, and the locking in of pressure during pressure tests.

#### Typical Uses

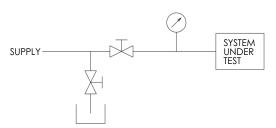

When pressure testing it is desirable to minimise the number of leakage points exposed to the system under test. In the configuration shown supply pressure can be removed leaving onlytrapped pressure in the system being tested.

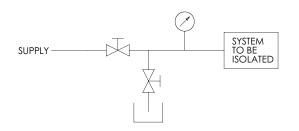


When it is necessary to isolate and remove pressure from part of a system, a block-and-bleed configuration can be used.


#### Metering Valves

They can be used in either "meter-in" or "meter-out" speed control systems and many are available with integrated check valves such that the flow control is provided in only one direction. Metering valves are not designed to provide a shut-off function and where this is required it is necessary to fit a separate Stop valve.


Typical Uses



In the configuration shown the metering valve provides bi-directional speed control of the actuator. The speed when extending is likely to differ from the retract speed as it will be dependent on pressure drop across the metering valve.




Using a metering valve with integral check, speed control is provided in the extend direction only. Reversing the connections to the metering valve allows speed control to be in the retract direction only.



When extending theactuator, placing the metering valve on the "meter-out" side of the actuator minimises the risk of a run-away load and associated cavitation. Adding a pilot operated check valve further reduces risk by ensuring that a positive pressureisalways present on the fullbore side of theactuator.

12/14



Utilising two metering valves with integral check valves provides entirely independent speed control of both the extend and retract functions.

#### Pressure Compensated Flow Regulators

Where either the supply pressure or the pressure required to operate an actuator is variable, the use of standard metering valves can lead to a high variation in actuator speed. In these circumstances, a pressure compensated flow regulator can be used, and this will provide an approximately constant flow rate over a wide range of differential pressures. Pressure compensated valves cannot be used to provide a shut-off function and where this is required it is necessary to fit a separate stop valve.

#### Selecting the Correct Product

Selection guide for stop valves

00.00.00.0	,									
	Page	Suitable for liquids	for <i>S</i> ydistale	POCTS - 3/8' BSP / NPT	1/2" – 1" BSP/NPT ports	Medium pressure ports	< insfeatatriolge	mount installementold	< handlear	PORT 3 PORT ONAL DIRECTIONAL
BNV10FC	5	<b>V</b>					<u>~</u>	.⊆		R S S
BNV25	6 - 7	<b>V</b>		V			V	V	Z	T 3 F
BNV25-G	8 - 9	V	V	V			V	V	0	NO N
BNV25-TB	10 - 11	V		V			V	V	SHUTTLE	ANDDIRECTION AND AND AND AND AND AND AND AND AND AN
BNV50	12	V			V				SH	
BNV50-G	13	V	V		V					OQ.
BNV44AE	14 - 15	V				V			V	
BNV56AE	16 - 17	V				V			V	
BNV81AE	18 - 19	V				V			V	OT
Important –						e data sheet a u require are		on notes must	be thoroughly	CHERROT

#### Selection guide for metering valves

	Page	Suitable for liquids	< forSydstate	ports 1/4"-3/8" BSP / NPT	1/2"-1" BSP/NPT ports	<insfeatatriologe< th=""><th>mount installementold</th><th>Integral check valve</th><th>Pressure Compensate</th></insfeatatriologe<>	mount installementold	Integral check valve	Pressure Compensate
MF25	20 - 21	V	\ \ \	V		·	.₩		
FMF25	22	V	V	V					
VFMF25	23	V	V	V					
MF37	24	V	V	V					
MF50	25	V	V		V				
MF75	26	V	V		V				
MF100	27	V	V		V				
CMF25	28	V	V						
CMF37	29	V	V						
CMF50	30	V	V		V				
CMF75	31	V	V		V				
CMF100	32	<b>∀</b>	<b>∀</b>		V			\ \ \	
IMC25	33	<b>∀</b>		.,,	V			\ \ \	
IMC37	34	V		V				\ \ \ \	
IMC50	35	V		V				\ \ \ \ \	
PCFR50	36				V			v	
		-			V	<b>V</b>			<b>✓</b>

Important— Thisisaguide to selecting products that may be suitable. The valve data sheet and application notes must be thoroughly reviewed prior to final selection. Please contact us if the options you require are not shown



PORT 3 PORT



#### Intended Use

Theproducts in this catalogue have many potential applications and are used across a wide variety of industries. They are primarily intended for use in industrial and onshore and offshore topside applications. Products should always be used within the parameters specified on the product data sheet, and should be installed, operated and maintained in accordance with the instructions supplied. BIS Valves will offer all possible assistance to ensure correct product selection, but it is the ultimate responsibility of the customer to ensure that the final product selection is suitable for the intended application.

#### Prohibited Uses

Theproducts in thiscatalogue are not intended for use in automotive, shipbuilding, aerospace, military or nuclear applications. The products are not designed for contact with foodstuffs. Use with oxygen or with oxygen rich gas mixes is prohibited. Please contact BiS Valves prior to ordering products for use in any of the above applications.

#### Subsea Applications

Suitability for subsea applications should not be assumed unless it is specifically stated on the product data sheet. In many cases BiS Valves have subsea variants of standard catalogue products available, or can design bespoke subsea variants specifically for your application. Please do not hesitate to contact Bis Valves with your requirement.

Where the product data sheet states suitability for short term subsea use, this should be interpreted as meaning that the product is capable of functioning subsea but that corrosion will occur over time. The acceptable length of deployment will depend on the specific subsea environment and the effect of that environment on the exposed materials of construction, which should be evaluated by the customer

Where the product data sheet states suitability for subsea use, this should be interpreted as meaning that the product is capable of functioning subsea and that the externally exposed materials of construction will withstand longer term subsea use. The acceptable length of deployment will depend on the specific subsea environment and the effect of that environment on the exposed materials of construction, which should be evaluated by the customer. It is recommended that BiS Valves are consulted where deployment is intended to exceed five years without retrieval and refurbishment and for deployment depths greater than 3,000 metres. For all long term deployments, it is recommended that the system is designed such that failure of a single component does not cause failure of

For subsea applications, take care to choose an appropriate subsea suitable piping system. BiS Valves recommend that particular care is taken if selecting BSP ported products for subsea use.

#### Cleanliness

critical system functions.

Fluidcleanliness is critical to the reliability of all fluid power products. BiS Valves take every precaution to ensure that products are clean at the time of supply. Component parts are cleaned prior to assembly and testing is carried out with test fluids verified as clean to a maximum of AS4059 class 6B-F.

For maximum service life it is recommended that the products are used with fluid maintained at or below AS4059 class 6B-F. Use with higher levels of contaminant should be expected to result in a reduction in service life. Certain product designs are inherently more robust in systems where fluid cleanliness cannot be guaranteed, and it is recommended to contact BiS Valves prior to ordering products for use in such applications.

There is an increased risk of damage to the product at the time of installation, due to contaminant generated during the assembly of the system and associated pipework. Precautions should be taken to ensure that contaminant is not transferred into the product during flushing procedures and initial system operations.

Where fluid contamination presents a risk of failure to critical valve functions, it is recommended to consider fitting a device protection filter from the BiS Valves F or EF ranges. However, this should not be considered as being a substitute for sound hydraulic cleanliness practise.

#### **Product Testing**

All products are tested for proof pressure integrity, typically at 1.5 times the working pressure, and are tested to ensure correct functionality as part of our standard manufacturing process. Testing will be carried out using an appropriate test fluid that suits the specific product being tested. The test fluid used will be referenced on the test certificate supplied with the product. In cases where the test fluid used is not compatible with the media in the system into which the product will be installed, the customer may need to flush the product prior to installation. If the product to be supplied must be tested using a specific fluid, please ensure that this is requested prior to quotation and ordering.

#### Leakage

BiS Valves products are typically designed to provide the very low leakage levels expected by the offshore oil and gas industry, other than certain products such as flow control valves that are not intended to fully close. The actual leakage rate achieved will depend on various factors, such as fluid viscosity and pressure differential, but with liquids is expected to be below a level where it is appropriate to measure by collecting a fluid volume or counting drops, hence a pressure decay and trapped volume method of leakage detection is used. If the product to be supplied must be tested to prove a specific leakage rate, please ensure that this is requested prior to quotation and ordering, such that the suitability of the product and the standard test procedure may be assessed.

12/14

#### **Materials**

Each product data sheet gives limited guidance relating to the generic type of operating media with which the product is suitable, and the materials of construction. As part of our quotation and order process, BiS Valves will supply an Application Data Request form and from the data supplied will give all possible assistance to ensure correct product selection. However, since it is not possible for BiS Valves to validate products against every conceivable operating parameter, it is essential that the customer satisfies themselves that the product is suitable for their specific application prior to purchase and use.

Alternative construction materials, including exotics, can often be made available on request.

#### Seals

Each product data sheet contains model code options for various seal materials that are available as preferred options. Many other seal materials and grades are available. Please contact us for a quotation.

Where generic standard materials are specified (eg. Viton®, nitrile, etc), the exact grade of material cannot normally be guara bed If you require a specific grade of seal material, please specify when requesting a quotation.

When choosing or specifying a seal material, always ensure that the material is suitable for the application in terms of both temper and chemical compatibility. Always seek advice from the fluid manufacturer if in doubt with regards to material compatibility. Never specify Ethylene Propylene seals for use with mineral oils or other hydrocarbon based media.

Viton® and Kalrez® are registered trademarks of E.I. du Pont de Nemours and company or its affiliates. Bi\$ Valves use genuine Viton® and Kalrez®.

#### Pressure Equipment Directive 97/23/EC

Theproductsin this catalogue are classified as Pressure Accessories in terms of the definitions within the Pressure Equipment Directive. The products in this catalogue are classified as Pressure Accessories in terms of the definitions within the Pressure Equipment Directive. Since the products fall below sizes specified within the Directive, the products fall outside categories I to IV, and hence are engineered in accordance with "sound engineering practise" and are not supplied with a CE mark. in accordance with "sound engineering practise" and are not supplied with a CE mark.

#### ATEX Directive 94/9/EC

Themajority of products supplied by BiS Valves can be used in hazardous areas containing potentially explosive atmospheres covered by the ATEX and DSEAR regulations, for zones 1 and 2. As standard, products are not CE marked and should not be used in these environments. However, should use in these areas be required, please ensure that the requirement is specified, along with the zone in which the equipment is to be used, when requesting a quotation or ordering. Following assessment, the products can normally be supplied with a CE mark and declaration of conformity at no extra charge.

Manyproducts supplied by BiS Valves can be configured for use in sour H2S containing environments. This often requires some material changes from the standard product. Where compliance with NACE MR01-75 is required, please specify when requesting a quotation.

#### Traceability

Unless otherwise requested, only the main pressure containing component in finished products are traceable back to original material. Should either full or a greater level of traceability be required, please ensure that this is specified when requesting a quotation.

#### Documentation

Standard documentation supplied with BiS Valves products includes a pressure test / conformity certificate, parts list (including available spare parts), assembly drawing, installation, operation and maintenance instructions, and a material certificate for the main pressure containing component, along with any EC conformity declarations appropriate to the product. If further documentatien is required, please specify when requesting a quotation. Documenation is delivered as a hard copy with the goods. If electronic documentation is required, please specify when ordering.

#### Maintenance

Due to the wide variety of applications in which BiS Valves products are utilised, it is impossible to set generic service intervals. It is recommended that the end user should assess their application, including factors such as duty cycle, hostility of the environment both inside and outside the product, and the criticality and consequence of failure, and set in place a preventative maintenance schedule accordingly. It is further recommended that performance is monitored and reviewed to refine the balance between reliability and cost It is recommended that products are returned for repair and refurbishment by BiS Valves. However, it is acknowledged that this may

not always be possible, and Seal Kits and Repair Kits are available for most BiS Valves products. Product maintenance should only be

carried out following safe isolation from the system, in clean conditions, by competent personnel, and fully in accordance with the maintenance instructions supplied.

#### Warranty

BiS Valves warrants that for a period of 12 months from the date of first use or for a period of 24 months from date of delivery (whichever expires first) the product shall be free from material defects in design, material and workmanship. Should it be necessary to return a product, please contact the BiS Valves sales team in advance. This is of additional importance if the goods are being returned to the UK from non EU countries, to allow BiS to ensure compliance with the relevant UK customs procedures. Failure 19 comply can result in a demand for payment of Customs Duties which BiS may have to pass on to the customer.







1/8"

UP TO 1,379,848



The BNV10FC isacartridge strowides valve. It tight shut-off whenclosed via a T-bar handle. Coarse adjustment allows fast operation. The valve may be used with the same functionality in either direction.

- 11 Manual stop or shut-off valve
- ULockable adjustment
- LCartridge style ideal for use in manifolds
- 1 Non-rotating valve stem protects valve seat Metal to metal seating with hardened stem for durability Suitable for uni-directional or bi-directional shut-off Short handle option for pressures up to 862 bar (12,500psi) allows compact system designs
- 11 Stainless steel construction
- II Suitable for use with mineral oils, water glycols and plain water Compatible with many other media, contact us for advice Various seal options available

#### **Specifications**


#### **BASIC MODEL BNV10FC NUMBER** SYMBOL MAX WORKING 1,379 bar (20,000 psi) **PRESSURE** Up to 0.20 CV (FLOW CAPACITY) See performance graph Liquids only FLUID See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section 1/8" NOMINAL SIZE 0.29 kg WEIGHT (0.64 lb)

#### **Materials**

Externally Exposed Parts: 316 stainless steel and aluminium bronze. Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal. The standard valve is designed for use with mineral oil, water glycols and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.

The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operatingtemperaturemust be considered.

#### Typical Performance

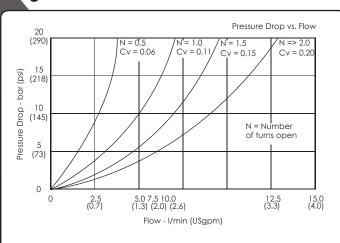

TypTicyapli cpaelr pfoermrfoarmncaen bcae sbeads e

#### Installation Diagram

Product Selector

**VALVE** 

TYPE

BNV10


Repair and seal kits are available


For a seal kit add SK at the end of the

model code and for a repair kit add RI

www.bisvalves.co.uk

Catalogue also available on digital media Visitourwebsite forafull online search facility

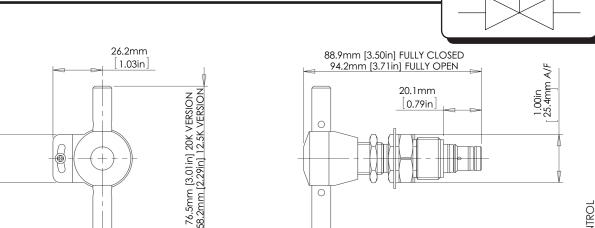

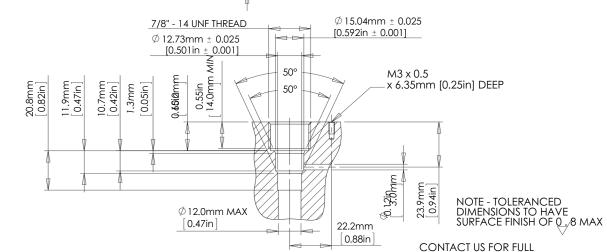

BNV10 FC - NBR - 12.5K

**CAVITY DETAIL** 

**PORTING OPTIONS** 

FC Full cartridge

SEAL **OPTIONS** Leaveblank for Viton®seals -10°C to +120°C

NBR

Nitrile seals -30°C**⊭cp**105°C EPDMseals -45°C to+120°C

KLZ Kalrez® seals -25°C to+120°C **HNBR** 

HydrogendtedNineseals

Further seal options are available on request

Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered

MAX WORKING **PRESSURE** 

SHUTTLECONTROLCONTROL

ANDDIRECTIONAL DIRECTION

CHERATED

RELIEF

**FLEQUESS** 

FILTERS

PUMPS

CAVITY MANUFACTURING DETAILS

12.5K 862bar (12,500psi) Liquid

20K 1,379 bar

(20,000 psi) Liquid

Page 5



#### BNV25— STOPVALVE

1/4" 3/8"

#### UP TO 690 BAR 10,000 PSI



The BNV25 is a 1/4" nominal bore stop valve. It provides tight shut-off when closed via the knurled handwheel.

Coarse adjustment allows fast operation. For uni-directional service, the valve is marked with a preferred direction of flow, but the valve may be

with the same functionality in the opposite direction.

- 11 Manual stop or shut-off valve
- 11 Lockable adjustment
- 11 Panel mount option
- 11 Non-rotating valve stem protects valve seat
- Suitable for uni-directional or bi-directional shut-off Stainless steel construction

Suitable for use with mineral oils, water glycols and plain water Compatible with many other media, contact us for advice NACE MR01-75 compliant versions available, contact us for advice


- I Various porting options available, including manifold mount and cartridge installation options
- Various seal optionsavailable

#### **Specifications**

#### BASIC MODEL **NUMBER**

#### BNV25

SYMBOL



MAX WORKING PRESSURE

690 bar (10,000 psi)

CV (FLOW CAPACITY)

Up to 0.52 See performance graph

**FLUID** 

Liquids only See materials section

TEMPERATURE RANGE

See Product Selector opposite and Technical Data section

**PORT SIZE** 


1/4" or 3/8"

WEIGHT

PORTED 0.65 kg (1.43 lb) C 0.35 kg (0.77 lb)

FC 0.50 kg (1.10 lb)

Specifications may change without notice

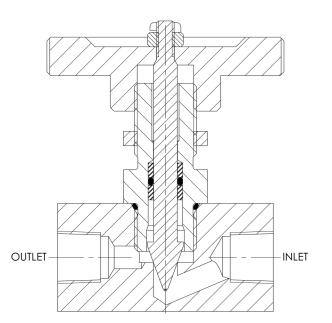

#### Materials


stainless steels. Electroless nickel plated bolts for the manifold mount version. Internally Wetted Parts: 316 and 17-4 PH stainless steel, acetal and PTFE.

The standard valve is designed for use with mineral oil, water

and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.

The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operating temperaturemust be considered.


#### Typical Performance

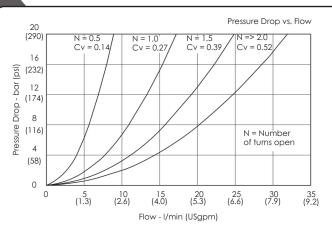



TypTTicyyapplii ccpaaell rppfoeerrmrffooarrmmncaaer


#### Installation Diagram

STANDARD VALVE





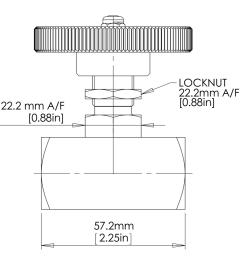

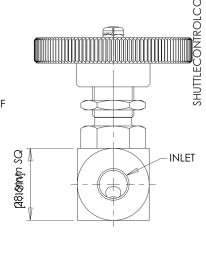

ANDDIRECTIONAL DIRECTION

CHERATED

FILTERS

Product Selector

BNV25 P - PM - NBR - 10K

**TYPE OPTIONS** 

BNV25

VALVE

1/4" BSPP female

**PORTING** 

Ν 1/4" NPT female /37P 3/8" BSPP female /37N

3/8" NPT female

M

Manifold mount

C

Cartridge style

FC

Full cartridge

Repair andseal kits are availableon request For a seal kitadd SK at the end of the model code and for a repairkit add RK

Catalogue also available on digital media Visit our website for a full online search facility

www.bisvalves.co.uk

#### **VALVE OPTIONS**

Leave blank ifnotrequired PM

Panelmounted Not available formanifold or cartridge versions

**SEAL OPTIONS** 

Leaveblank for Viton®seals -10°C to +120°C

NBR

Nitrile seals -30°C**pp**105°C EPDMseals -45°C to+120°C

KLZ Kalrez® seals -25°C to+120°C

**HNBR** Hydrogenated Nitrile seals -20°C to +120°C

Further seal options are available on request

Exposure to high and low Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be consider **PRESSURE** 10K


MAX

WORKING


690bar (10,000psi) Liquid

Page 6




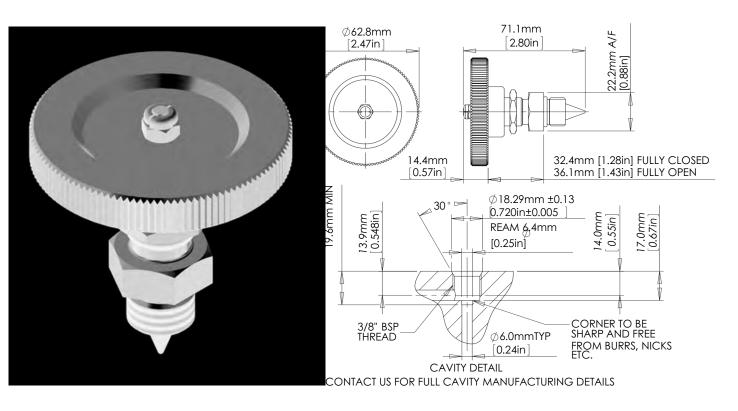


#### Full Cartridge Valve

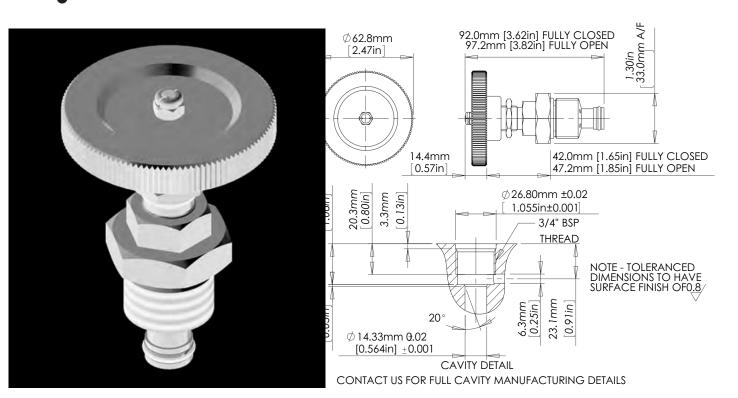

12/14

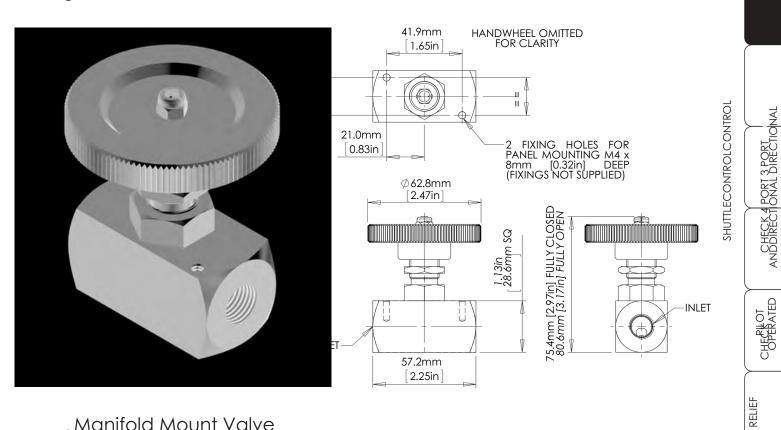

#### Manifold Mount Valve

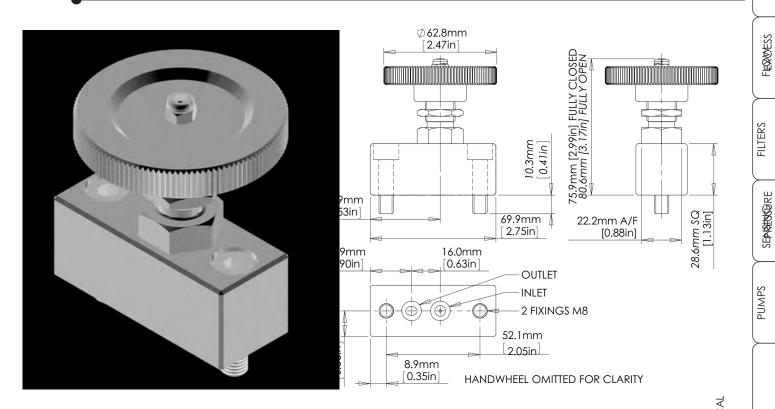





#### -BNV25-G STOP VALVE

1/4"3/8"

UP TO 414 BAR 6,000 PSI



The BNV25-G is a 1/4" nominal bore stop valve. It provides tight shut-off when closed via the knurled handwheel and is soft seated allowing use with liquid or gas Coarse adjustment allows fast operation. The valve is designed for uni-directional service only.


- 11 Manual stop or shut-off valve for liquid or gas
- ULockable adjustment
- UPanel mount option
- l Non-rotating valve stem protects valve seat
- Suitable for uni-directional shut-off
- Stainless steel construction
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils and water glycols
- $\ensuremath{^{\text{II}}}$  Compatible with many other media, contact us for advice
- Subsea variant available, contact us for advice
- Various porting options available, including manifold mount and cartridge installation options
- ι Various seal optionsavailable

#### Specifications

#### BASIC MODEL NUMBER

BNV25-G

SYMBOL



MAX WORKING PRESSURE

414 bar (6,000 psi)

CV (FLOW CAPACITY)

Up to 0.52 See performance graph

FLUID

Liquids and Gases
See materials section

TEMPERATURE RANGE

See Product Selector opposite and Technical Data section

PORT SIZE

1/4" or 3/8"


WEIGHT

PORTED 0.65 kg (1.43 lb)

C 0.35 kg (0.77 lb)

FC 0.50 kg (1.10 lb)

Specifications may change without notice

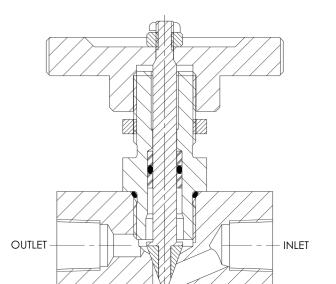


#### **Materials**

Externally Exposed Parts: 316, 431 and other 300 series stainless steels. Electroless nickel plated bolts for the manifold mount version. Internally Wetted Parts: 316 and 431 stainless steel, polyamide- imide, acetal and PTFE.

The standard valve is designed for use with air, nitrogen, sweet gatural gas, mineral oil and water glycols, but may be used with wide variety of media compatible with the materials of construction


Other material options are available, please contact us for the standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operating temperature must be considered.

#### Typical Performance

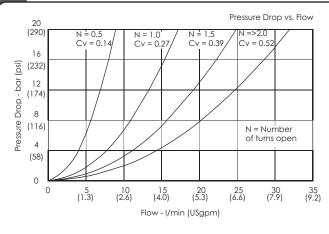

Typical performance based on water glycol


#### Installation Diagram



ANDDIRECTIONAL DIRECTION

CHERATED


STANDARD VALVE

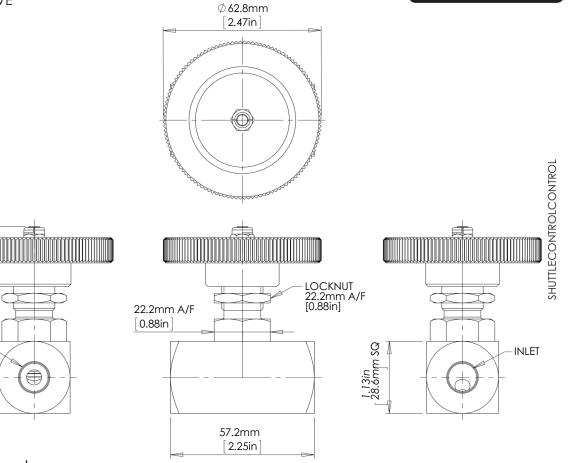

Product Selector

OUTLET


74.1mm [2.92in] FULLY CLOSED 80.5mm [3.17in] FULLY OPEN

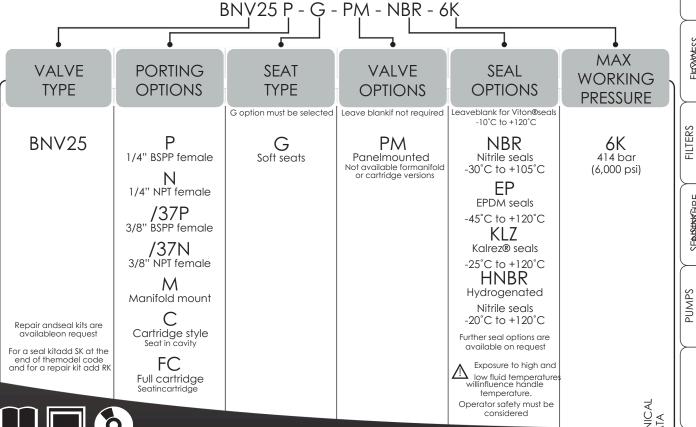




Catalogue also available on digital media Visit our website for a full online search facility www.bisvalves.co.uk



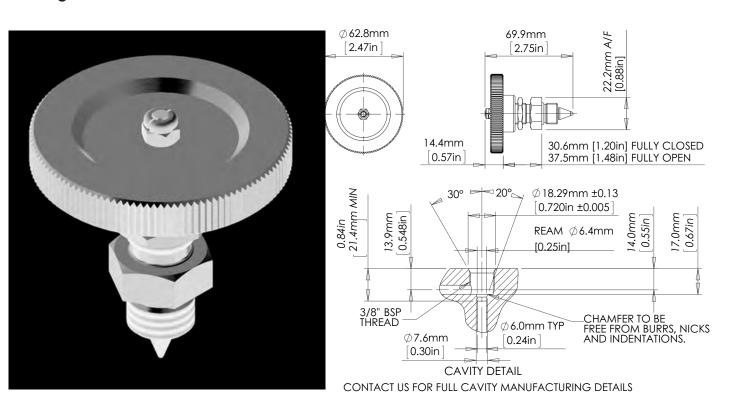


#### Full Cartridge Valve

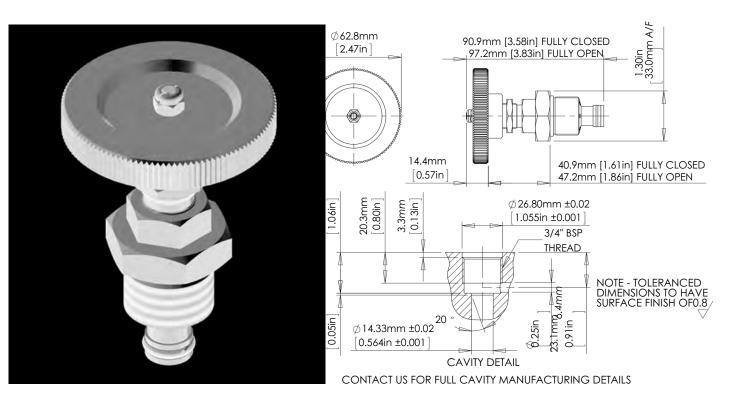


12/14

#### Panel Mounted Valve

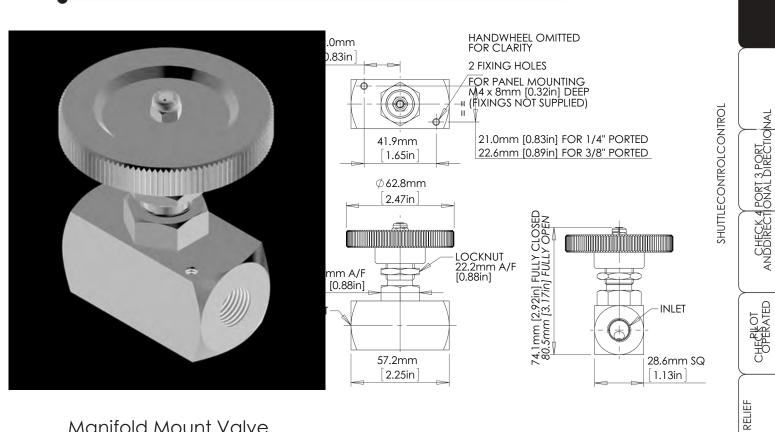

#### Manifold Mount Valve

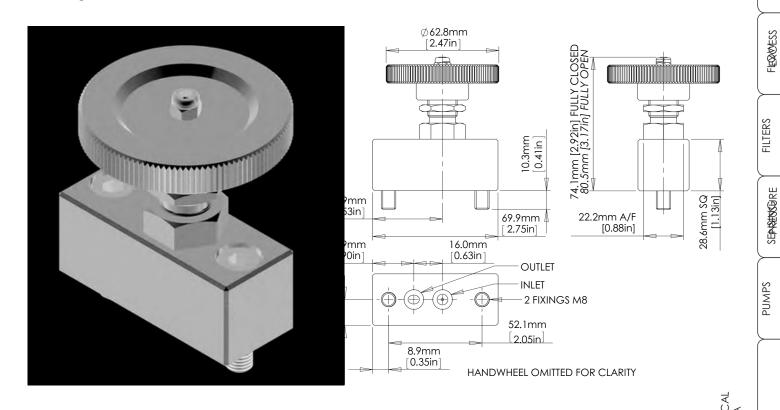





#### -BNV25-TB

#### STOP VALVE



UP TO 862 BAR 12,500 PSI

The BNV25-TB is a 1/4" nominal bore stop valve. It provides tight shut-off when closed via a T-bar handle.

Coarse adjustment allows fast operation. For uni-directional service, the valve is marked with a preferred direction of flow, but the valve may be

with the same functionality in the opposite direction.

- 11 Manual stop or shut-off valve
- 11 Lockable adjustment
- 11 Panel mount option
- 11 Non-rotating valve stem protects valve seat
- 11 Suitable for uni-directional or bi-directional shut-off Stainless steel construction

Suitable for use with mineral oils, water glycols and plain water Compatible with many other media, contact us for advice


- All wetted parts comply with NACE MR01-75
- Various porting options available, including manifold mount and cartridge installation options
- I Various seal options available

#### Specifications

#### BASIC MODEL **NUMBER**

#### BNV25-TB

SYMBOL



MAX WORKING PRESSURE

862 bar (12,500 psi)

CV (FLOW CAPACITY)

Up to 0.75 See performance graph

**FLUID** 

Liquids only See materials section

TEMPERATURE RANGE

See Product Selector opposite and Technical Data section

**PORT SIZE** 

1/4" or 3/8"

WEIGHT

PORTED 0.79 kg (1.73 lb) C 0.23 kg (0.50 lb)

FC 0.48 kg (1.05 lb)

Specifications may change without notice


# OUTLET INLET

#### Materials

Electroless nickel plated bolts for the manifold mount version. Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal. The standard valve is designed for use with mineral oil, water glycols and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.

The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operatingtemperaturemust be considered.

#### Typical Performance

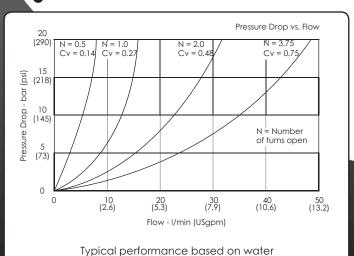



Installation Diagram

ANDDIRECTIONAL DIRECTION

CHERATED

STANDARD VALVE

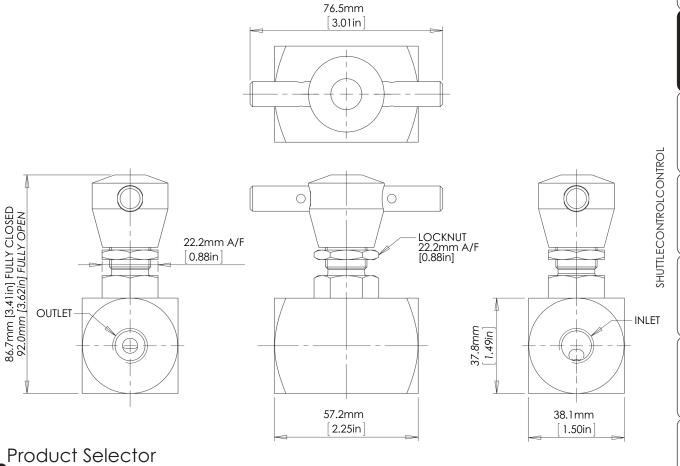


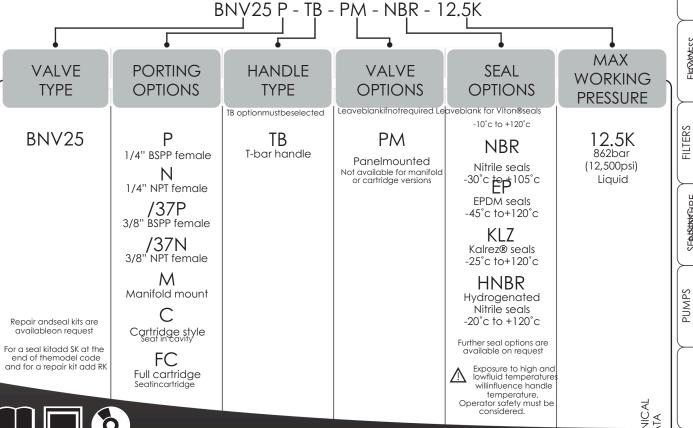



Catalogue also available on digital media Visitourwebsite forafull online search facility www.bisvalves.co.uk




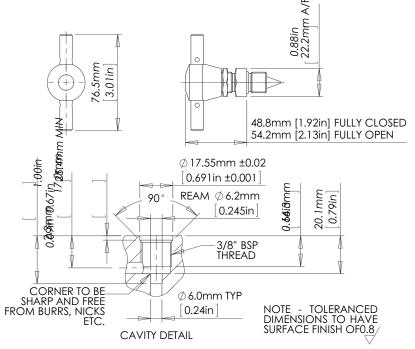

CONTACT US FOR FULL CAVITY MANUFACTURING DETAILS


#### Full Cartridge Valve



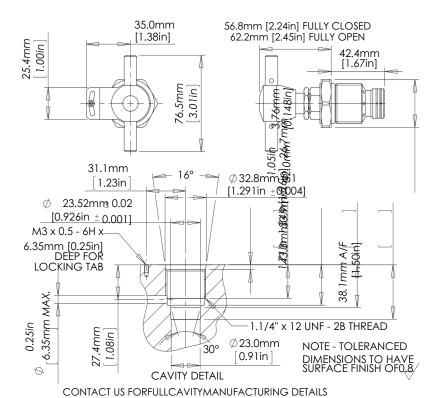



#### Panel Mounted Valve



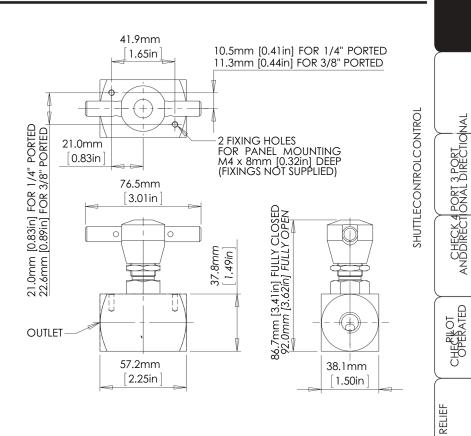

#### Manifold Mount Valve

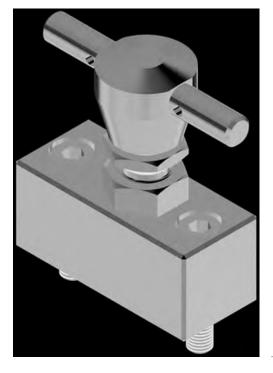

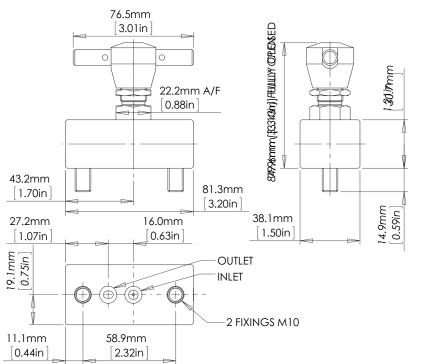



FLEXAMESS

FILTERS

PUMPS

#### BNV50-STOPVALVE



#### **UP TO 690 BAR** 10,000 PSI

The BNV50 is a 1/2" nominal bore stop valve. It provides tight shut-off when closed via the knurled handwheel with extension bars.

Coarse adjustment allows fast operation. For uni-directional service, the valve is marked with a preferred direction of flow, but the valve may be

with the same functionality in the opposite direction.

- 11 Manual stop or shut-off valve
- 11 Lockable adjustment
- 11 Panel mount option
- 11 Non-rotating valve stem protects valve seat
- 11 Suitable for uni-directional or bi-directional shut-off
- Stainless steel construction
- Suitable for use with mineral oils and water glycols

Compatible with many other media, contact us for advice

Cartridge version available, contact us for details

Various porting options available


Various seal options available

#### Specifications

#### **BASIC MODEL** NUMBER

#### BNV50

SYMBOL



MAX WORKING PRESSURE

690 bar (10,000 psi)

CV (FLOW CAPACITY)

TEMPERATURE RANGE

Up to 2.1 See performance graph

FLUID

Liquids only See materials section

See Product Selector opposite and Technical Data section

**PORT SIZE** 

1/2" or 3/4"

WEIGHT

1.7 kg (3.7 lb)

Specifications may change without notice


-OUTLET INLET

#### **Materials**

steels. Internally Wetted Parts: 316 and 440C stainless steel and acetal. The standard valve is designed for use with mineral oil and water glycols, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.


The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operatingtemperaturemust be considered.

#### Typical Performance

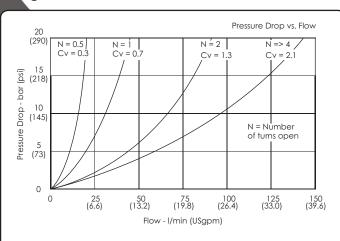

Typical performance based on water glycol

#### Installation Diagram

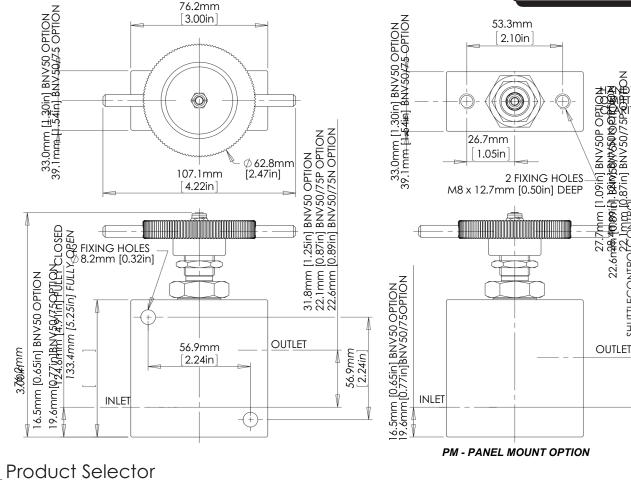

BNV50 P - PM - NBR - 10K

3/4" NPT female

VALVE **PORTING TYPE OPTIONS** BNV50 1/2"BSPPfemale Ν 1/2"NPTfemale /75P 3/4"BSPPfemale /75N

**VALVE OPTIONS** 

Panelmounted

Leave blank ifnotrequired Leaveblank for Viton®seals -10°C to +120°C PM

NBR Nitrile seals -30°CKP\_**7**105°C Kalrez® seals -25°C to +120°C

**SEAL** 

**OPTIONS** 

**HNBR** Hydrogenated Nitrile seals

-20°C to +120°C Further seal options are available on request

Exposure to high and low fluid temperatures will influence handle temperature.

Operator safety must be conside



Renair andseal kits are

availableonrequest
For a seal kitaddSK at the end
of the modelcode and for a
repairkitadd RK

Catalogue also available on digital media Visit our website for a full online search facility www.bisvalves.co.uk



Page 12

OUTLET

MAX

WORKING

**PRESSURE** 

10K

690bar

(10,000psi)

Liquid

CHERRATED

FILTERS





#### UP TO 414 BAR 6,000 PSI

The BNV50-G is a 1/2" nominal bore stop valve. It provides tight shut-off when closed via the knurled handwheel and is soft seated allowing use with liquid or gas. Coarse allows fast adjustment The operation. valve designed for uni-directional service only.

aive for liquid or gas

- **ULockable** adjustment
- UPanel mount option
- 1 Non-rotating valve stem protects valve seat
- Suitable for uni-directional shut-off
- Stainless steel construction
- Suitable for use with air, nitrogen, sweet natural gas, mineral
- LI Compatible with many other media, contact us for advice
- 11 Cartridge version available, contact us for details
- Various porting options available
- Various seal options available

#### Specifications

#### BASIC MODEL **NUMBER**

#### BNV50-G

SYMBOL



MAX WORKING PRESSURE

414 bar (6,000 psi)

CV (FLOW CAPACITY)

Up to 2.1 See performance graph

FLUID

Liquids and Gases See materials section

TEMPERATURE RANGE

See Product Selector opposite and Technical Data section


**PORT SIZE** 

1/2" or 3/4"

WEIGHT

1.7 kg (3.7 lb)

Specifications may change without notice

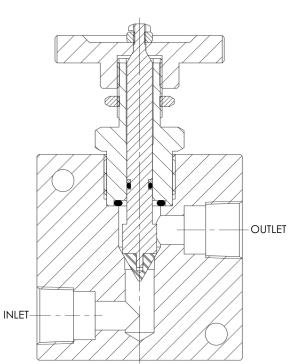

#### Materials


steels. Internally Wetted Parts: 316 and 431 stainless steel, polyamide-imide and acetal.

The standard valve is designed for use with air, nitrogen, sweet patural gas, mineral oil and water glycols but may be used with wide variety of media compatible with the materials of construction.

Other material options are available, please contact us for


The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operatingtemperature must be considered.

#### Typical Performance

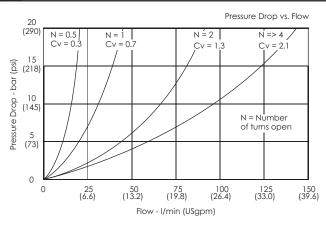

Typical performance based on water glycol

#### Installation Diagram

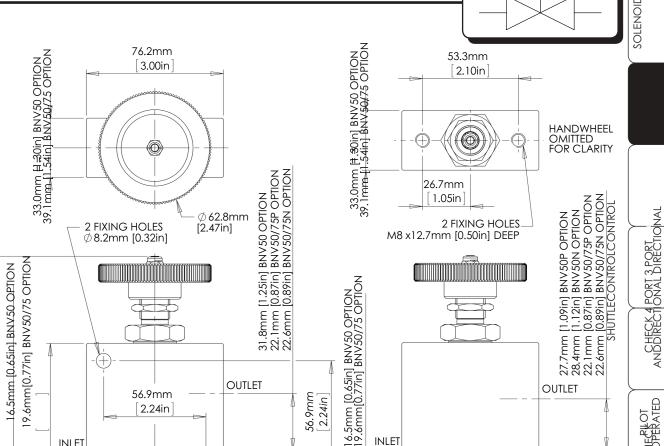

56.9mm [2.24in]

INLET

Product Selector

**INLET** 

24.6mm [4.91in] FULLY CLOSE® 133.4mm [5.25in] FULLY OPEN


PM - PANEL MOUNT OPTION

OUTLET

CHERRATED

FILTERS

Page 13

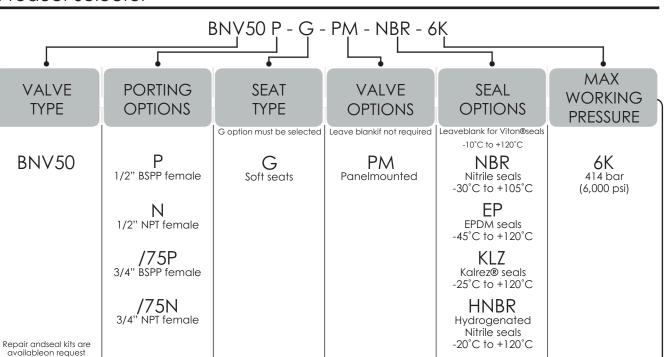

OUTLET

(H)

56.9mm

2.24in



For a seal kitadd SK at the

end of themodel code and for a repair kit add R

Catalogue also available on digital media Visit our website for a full online search facility www.bisvalves.co.uk



Furtherseal options are

available on request


Exposure to high an lowfluid temperature willinfluence handle temperature.
Operator safety must be

considered.

### -B N V44AF

STOP VALVE

UP TO 13,78 BAR



I other applications where reliable operation is essential.

I Manual stop or shut-off valve

I Suitable for uni-directional or bi-directional shut-off

I Industry standard port and mounting configurations

I Non-rotating valve stem protects valve seat

I Free running, anti-galling handle assembly

I Minimised backlash provides greater operator control

I Metal to metal seating with hardened stem for durability

I Panel mountable and lockable adjustment

I Suitable for use with mineral oils, water glycols and plain water


I Compatible with many other media, contact us for advice

I Allwettedparts complywith NACE MR01-75

#### **Specifications**

#### BASIC MODEL **NUMBER**

SYMBOL



MAX WORKING

PRESSURE

(20,000 psi)

1,379 bar

CV (FLOW CAPACITY)

Up to 0.19 See performance graph

FLUID

Liquids only See materials section

TEMPERATURE RANGE

See Product Selector opposite and Technical Data section


**PORT SIZE** 

1/4" OD medium pressure

WEIGHT

0.7 kg (1.5 lb)

Specifications may change without notice

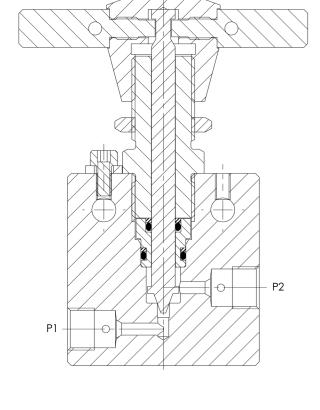

#### Materials


aluminium bronze.

Internally Wetted Parts: 316 and 17-4 PH stainless steel, and acetal.

The standard valve is designed for use with mineral oil, water


and plain water, but may be used with a wide variety of media compatible with the aneterials and seems trustion not be amounted as ons are available, please contact us for advice, available via the Product Selector. Compatibility with the working fluidat the operating temperaturemust be considered.

#### Typical Performance

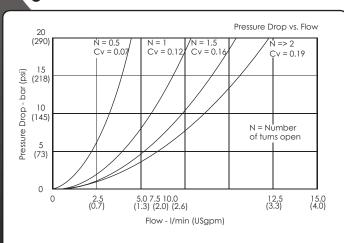



TypTicyapli cpaelr pfoermrfoarmncaen bcae sbeads e


#### Installation Diagram





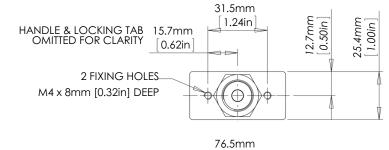

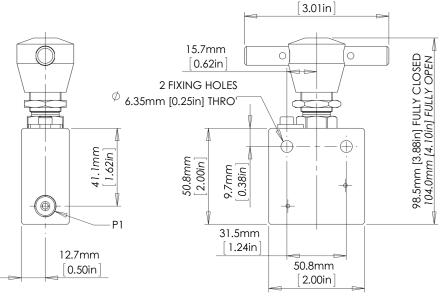

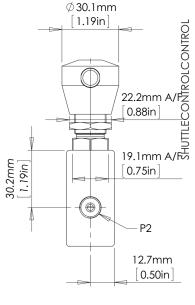

#### Product Selector

VALVE

TYPE

**PORTING PATTERN** 

BNV44AE - 01 - NBR - 20K

**BNV44AE** 

01 2-way straight 02 2-way angle 03

3-way (2 inlets) 04 3-way (2 outlets) 05

blackanathelened

Repair and seal kits are available on request

Catalogue also available on digital media Visitourwebsite forafull online search facility

For a seal kit add SK at the end of the

model code and for a repair kit add RI

www.bisvalves.co.uk

SEAL **OPTIONS** 

Leaveblank for Viton®seals -10°C to +120°C

NBR

Nitrile seals -30°C**⊭cp**105°C EPDMseals -45°C to+120°C

KLZ Kalrez® seals -25°C to+120°C

**HNBR** 

HydrogendtedNineseals Further seal options are available on request

Exposure to high and low fluid temperatures will influence handle temperature. Operatorsafety must be considered

MAX WORKING **PRESSURE** 

20K 1,379 bar

(20,000 psi) Liquid

FILTERS

ANDDIRECTIONAL DIRECTION

CHERATED



Page 14




ANDDIRECT ONAL DIRECTION


CHERRATED

#### Porting Pattern 02



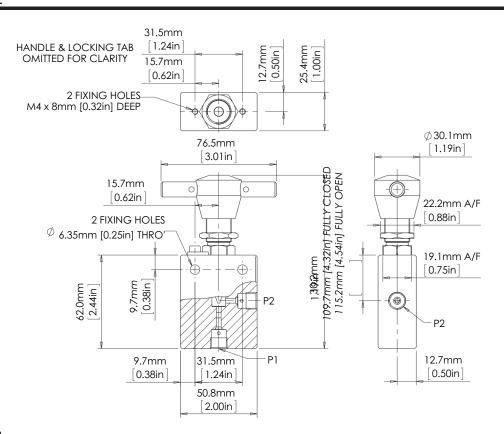


#### Porting Pattern 03

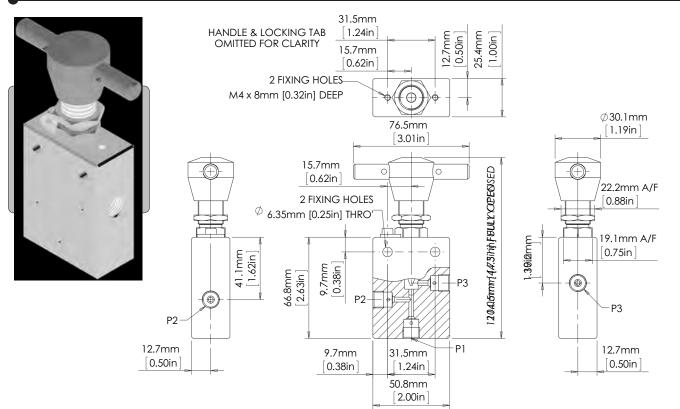


#### Porting Pattern 04



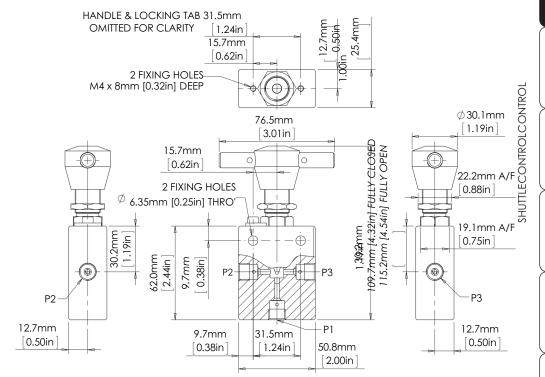

#### Porting Pattern 05



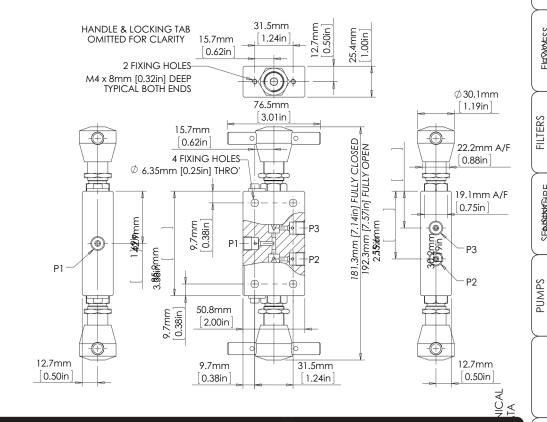



#### -BNV56AF-STOP VALVE

3/8"

UP TO 1,379 BAR 20,000 PSI



re testing and other applications

where reliable operation is essential.

I Manual stop or shut-off valve

I Suitable for uni-directional or bi-directional shut-off

I Industry standard port and mounting configurations

I Non-rotating valve stem protects valve seat

I Free running, anti-galling handle assembly

I Minimised backlash provides greater operator control

I Metal to metal seating with hardened stem for durability

I Panel mountable and lockable adjustment

I Suitable for use with mineral oils, water glycols and plain water

I Compatible with many other media, contact us for advice


I Allwetted parts complywith NACE MR01-75

#### Specifications

#### BASIC MODEL NUMBER

#### BNV56AE

SYMBOL



MAX WORKING PRESSURE

1,379 bar (20,000 psi)

CV (FLOW CAPACITY)

Up to 0.68
See performance graph

FLUID

Liquids only See materials section

TEMPERATURE RANGE

See Product Selector opposite and Technical Data section


**PORT SIZE** 

3/8" OD medium pressure

WEIGHT

0.7 kg (1.5 lb)

Specifications may change without notice

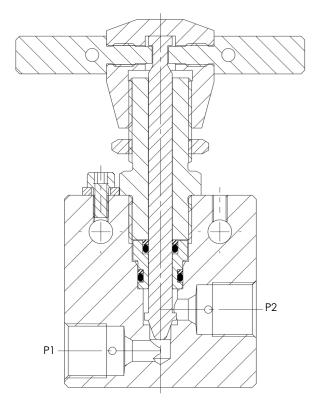

#### Materials

Externally ExposedParts: 316, other 300 series stainless steels and aluminium bronze.


Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with mineral oil, water

and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.


The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operating temperaturemust be considered.


#### Typical Performance

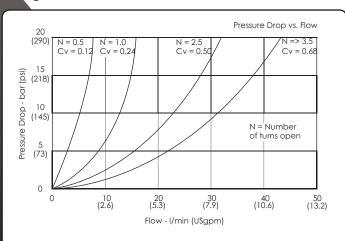


TypTicyapli cpael rpfoerrmfoarmncaen cbea sbeads e


#### Installation Diagram



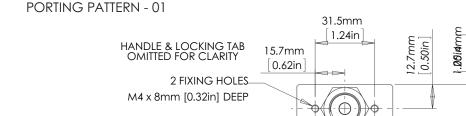

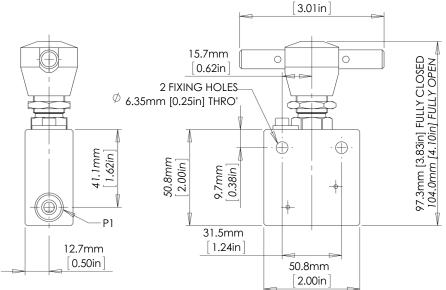

76.5mm

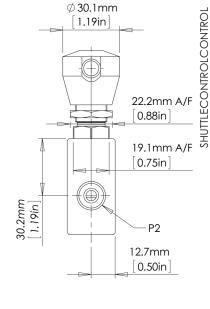

#### Product Selector

VALVE

TYPE

PORTING

BNV56AE - 01 - NBR - 20K

BNV56AE

01 2-way straight

**PATTERN** 

2-way angle 03 3-way (2 inlets)

04 3-way (2 outlets) 05

blackanathelened

Repair and seal kits are available on request

For a seal kit add SK at the end of the

Catalogue also available on digital media Visitourwebsite forafull online search facility

model code and for a repair kit add RK

www.bisvalves.co.uk

SEAL OPTIONS

Leaveblank for Viton®seals -10°C to +120°C

NBR

Nitrile seals -30°C 105°C EPDMseals -45°C to+120°C

KLZ Kalrez® seals

-25°C to+120°C HNBR

Hydroge adted 1979 ileseals

Further seal options are available on request

A Exposure to high and low fluid

temperatures will influence handle temperature.

Operatorsafety must be considered

MAX WORKING PRESSURE

> 20K 1,379 bar (20,000 psi

(20,000 psi) Liquid

MPS SE

FILTERS

ANDDIRECTIONAL DIRECTION

CHERATED






ANDDIRECTIONAL DIRECTION

CHERRATED


FLEXIMESS

#### Porting Pattern02




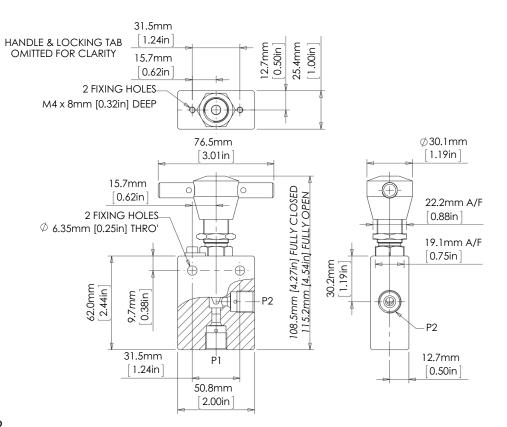


#### Porting Pattern 03

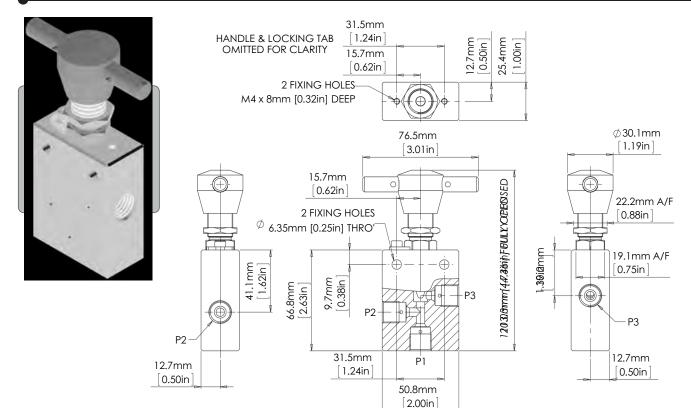

#### Porting Pattern 04

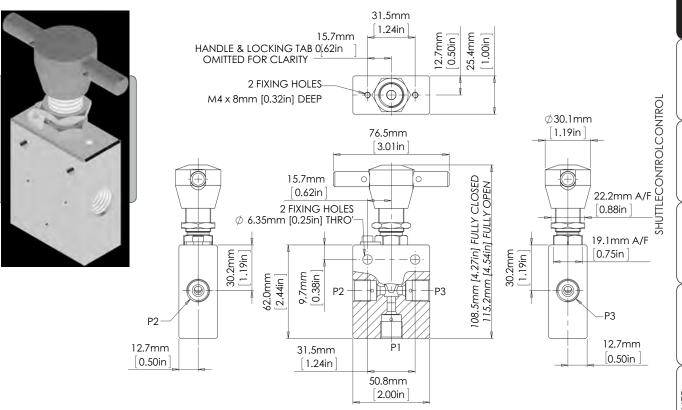

#### Porting Pattern 05

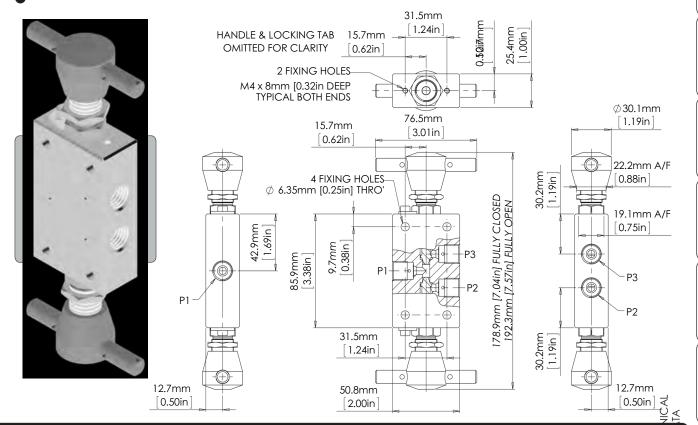

12/14



## ·BNV81AF

STOP VALVE

UP TO 1,378 BAS

9/16 provides long the need to ckings in servi

pressure testing and other applications where reliable operation is essential.

I Manual stop or shut-off valve

I Suitable for uni-directional or bi-directional shut-off

I Industry standard port and mounting configurations

I Non-rotating valve stem protects valve seat

I Free running, anti-galling handle assembly

I Minimised backlash provides greater operator control

I Metal to metal seating with hardened stem for durability

I Panel mountable and lockable adjustment

I Suitable for use with mineral oils, water glycols and plain water

I Compatible with many other media, contact us for advice


I Allwetted parts complywith NACE MR01-75

#### Specifications

#### BASIC MODEL **NUMBER**

#### BNV81AE

SYMBOL



MAX WORKING PRESSURE

1,379 bar (20,000 psi)

CV (FLOW CAPACITY)

Up to 1.45 See performance graph

FLUID

Liquids only See materials section

TEMPERATURE RANGE

See Product Selector opposite and Technical Data section


**PORT SIZE** 

9/16" OD medium pressure

WEIGHT

1.27 kg (2.80 lb)

Specifications may change without notice

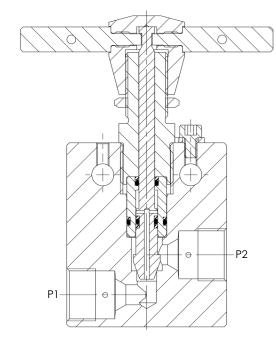

#### Materials

aluminium bronze.


Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with mineral oil, water

and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.

The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operating temperaturemust be considered.


#### Typical Performance

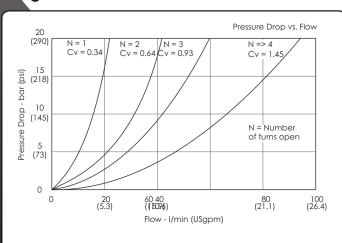


TypTicyapli cpael rpfoermrfoarmncaen bcea sbeads e

## PORTING PATTERN - 01

Installation Diagram

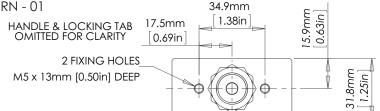

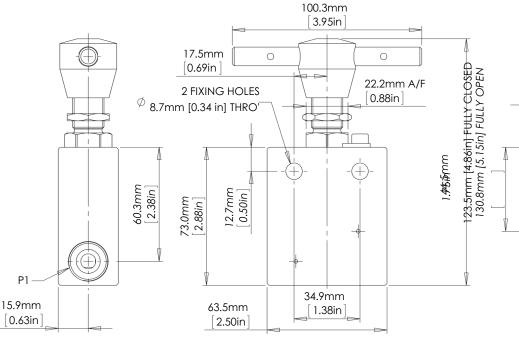

22.2mm A/O [0.88in] 10 NHOLLIFCOONING  $(\bigoplus)$ 15.9mm 0.63in

 $\emptyset$  30.1mm

[1.19in]

ANDDIRECTIONAL DIRECTIO

CHERATED

BNV81AE - 01 - NBR - 20K

VALVE **PORTING** TYPE **PATTERN** 

BNV81AE

**Product Selector** 

01 2-way straight 02 2-way angle 03

3-way (2 inlets) 04 3-way (2 outlets) 05

blackanathelened

Repair and seal kits are available on request For a seal kit add SK at the end of the

Catalogue also available on digital media Visitourwebsite forafull online search facility

model code and for a repair kit add RI

www.bisvalves.co.uk

SEAL **OPTIONS** 

Leaveblank for Viton®seals -10°C to +120°C

> NBR Nitrile seals -30°C**⊭cp**105°C

EPDMseals -45°C to+120°C

KLZ Kalrez® seals -25°C to+120°C

**HNBR** 

HydrogendtedNineseals Further seal options are available on request

Exposure to high and low fluid temperatures will influence handle temperature. Operatorsafety must be considered

MAX WORKING **PRESSURE** 

> 20K 1,379 bar (20,000 psi) Liquid


FILTERS

Page 18




#### Porting Pattern02



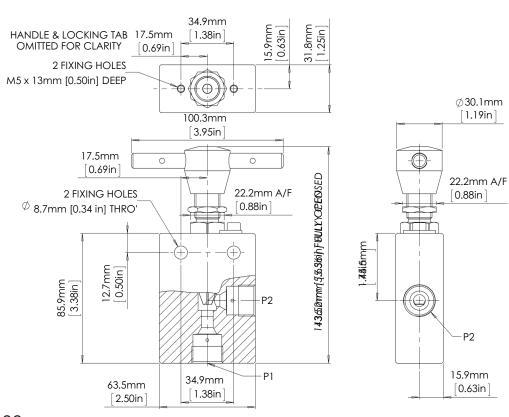


#### Porting Pattern 03




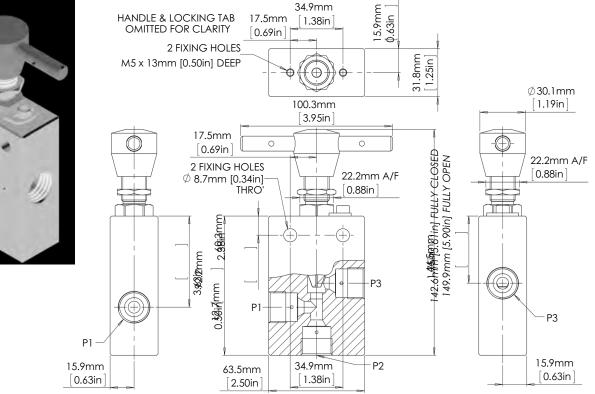

#### Porting Pattern 04

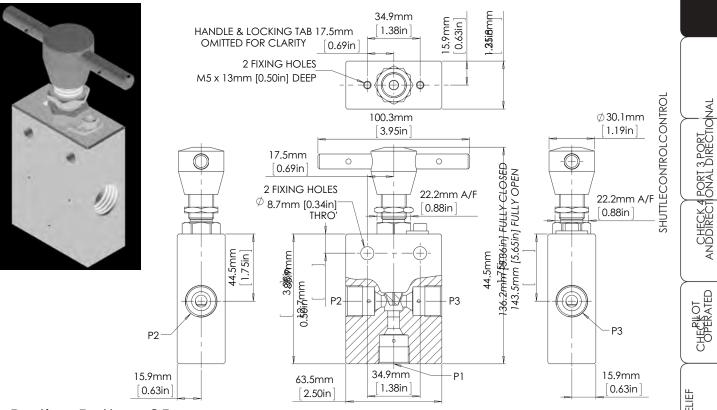

#### Porting Pattern 05

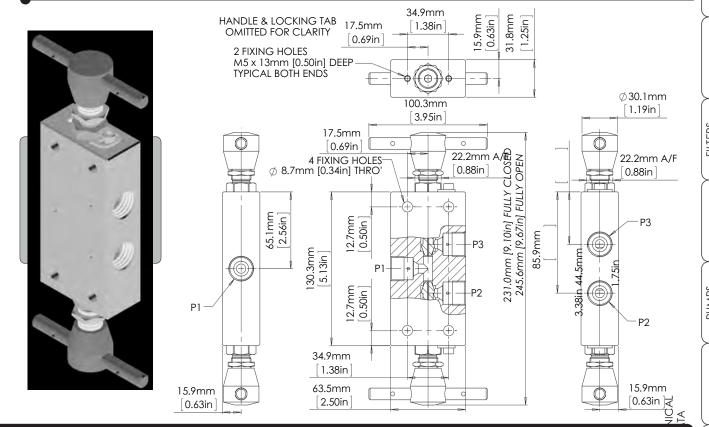



#### METERING VALVE

1/4"

UP TO 552 BAR 8,000 PSI

The MF25 is a 1/4" nominal bore flow metering valve, adjustable via a micrometer style handle. The valve preferred marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed

controluator, although the level metering will

depending on direction. ntended to provide tight shut-off when closed.

I Flow control valve for metering applications

- I Micrometer style adjustment with engraved graduations
- I Lockable adjustment
- I Non-rotating valve stem protects valve seat
- I Suitable for short term subsea use
- I Suitable for liquid or gas
- I Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- I Suitable for many other media. Contact us for advice
- I Cartridge, manifold mount and panel mount versions available
- Variousportingand sealoptions available

#### Specifications

#### BASIC MODEL MF25 NUMBER SYMBOL MAX WORKING 552 bar PRESSURE (LIQUID) (8,000 psi) MAX WORKING 276 bar PRESSURE (GAS) (4,000 psi) Up to 0.65 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases FLUID See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 1/4" 0.45 kg WEIGHT (1.0 lb)

# OUTLET -INLET

#### Materials


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and PTFE.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water and may be used with a wide variety of media compatible with the


ρξ construction. Other material options are available. Contact for adhrest and ard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operating temperature must be considered.


#### Typical Performance

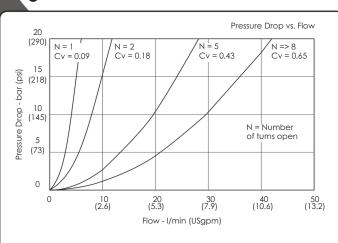


Typical performance based on water

#### Installation Diagram



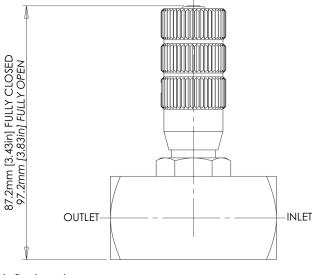

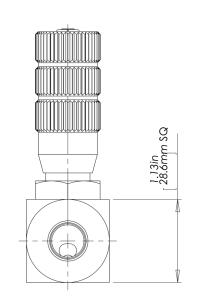

**Product Selector** 

MF25 P - PM - NBR - 8K

VALVE **PORTING TYPE OPTIONS** 

MF25

1/4" BSPP female

Ν 1/4" NPT female

M Manifold mount

C

FC

Fenticantridge

Cartridge style Repair andseal kits are availableonrequest For a seal kitaddSK at the end of the modelcode and for a

Catalogue also available on digital media Visit our website for a full online search facility

www.bisvalves.co.uk

VALVE **OPTIONS** 

Leave blank ifnotrequired PM

Panelmount Not available with manifold or cartridge versions

**OPTIONS** Leaveblank for Viton®seals -10°C to +120°C

**SEAL** 

**NBR** 

Nitrile seals -30°C to+105°C

**HNBR** Hydrogenated Nitrile seals -20°Cto +120°C

EP EPDMseals -45°C to+120°C

KLZ

-25% @1#@z+sb290°C

Further seal options are available on request

Exposure to high and low Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered

MAX WORKING **PRESSURE** 

SHUTTLECONTROLCONTROL

ANDDIRECTIONAL DIRECTION

CHERATED

8K

552 bar (8,000 psi) Liquid 276 bar


(4,000 psi) Gas

FILTERS


The Specifier's Catalogue




#### Panel Mounted Valve

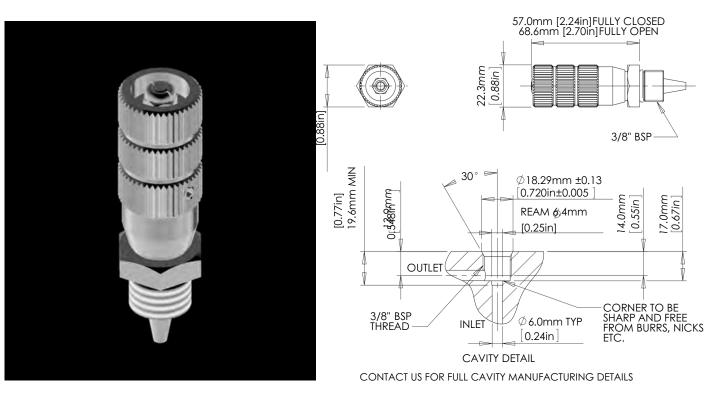




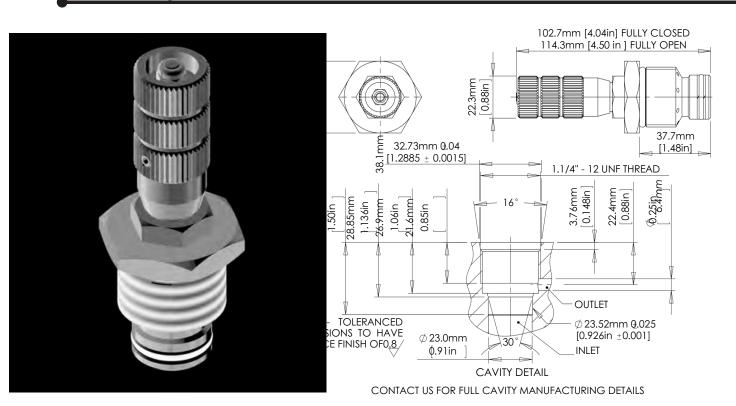

12/14

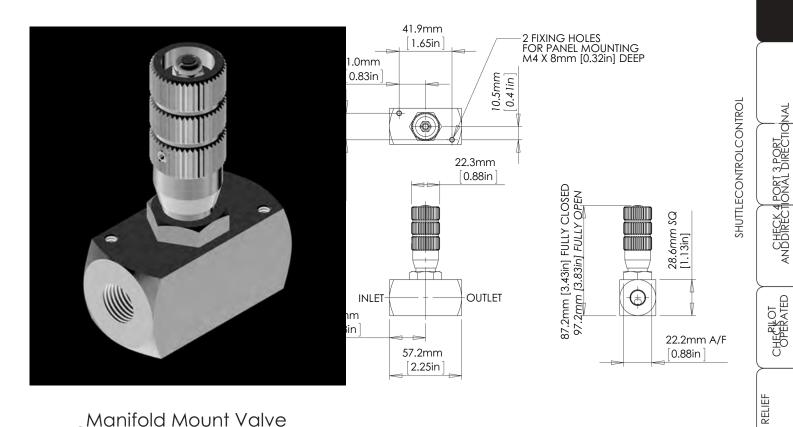

Manifold Mount Valve

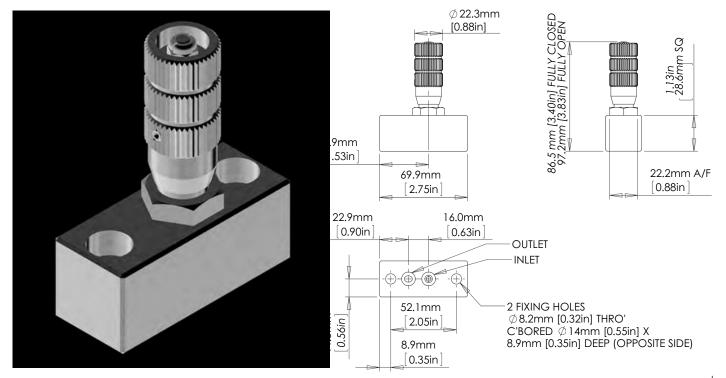





## \_FMF25\_

METERING VALVE

1/4"

UP TO 552 BAR 8,000 PSI

The FMF25 is a 1/4" nominal bore fine flow metering valve, adjustable via a micrometer style handle. The valve preferred marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed control of a cylinder or actuator, although the level

metering will

depending on direction.

tended to provide tight shut-off when closed.

I Fine flow control valve for metering applications

- I Micrometer style adjustment with engraved graduations
- I Lockable adjustment
- I Non-rotating valve stem protects valve seat
- I Suitable for short term subsea use
- I Suitable for liquid or gas
- I Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- I Suitable for many other media. Contact us for advice
- I Cartridge and manifold mount versions available. Contact us for advice
- Various porting and sealoptions available

#### Specifications

#### BASIC MODEL FMF25 **NUMBER** SYMBOL MAX WORKING 552 bar PRESSURE (LIQUID) (8,000 psi) MAX WORKING 276 bar PRESSURE (GAS) (4,000 psi) Up to 0.65 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases FLUID See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 1/4" 0.45 kg WEIGHT (1.0lb)

# OUTLET - INLET

#### **Materials**


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and PTFE.


The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water and may be used with a wide variety of media compatible with the


ρξ construction. Other material options are available. Contact for adhrest and ard valve has Viton® seals. Further seal options are available via the Product of available via the Product Selector. Compatibility with the working fluidat the operating temperature must be considered.


#### Typical Performance

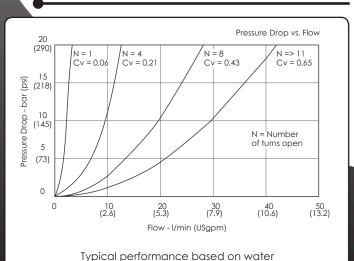

Installation Diagram

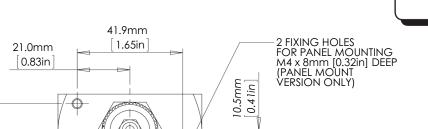

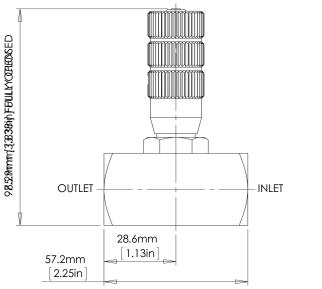

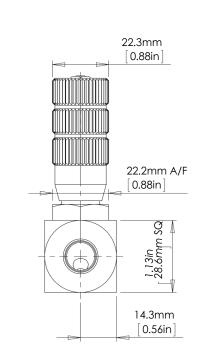

Product Selector

Repair andseal kits are

availableonrequest For a seal kitaddSK at the end

of the modelcode and for a

www.bisvalves.co.uk

Catalogue also available on digital media Visit our website for a full online search facility

FMF25 P - PM - NBR - 8K

VALVE **PORTING TYPE OPTIONS** 

FMF25 1/4" BSPP female

> Ν 1/4" NPT female

VALVE **OPTIONS** 

Leave blank ifnotrequired PM

**Panelmount** 

**OPTIONS** Leaveblank for Viton®seals -10°C to +120°C

**SEAL** 

**NBR** Nitrile seals -30°C to+105°C

**HNBR** Hydrogenated Nitrile seals

-20°Cto +120°C EP EPDMseals -45°C to+120°C

KLZ

-25%@#@z+sb291sC Further seal options are

available on request

Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered

8K 552 bar (8,000 psi) Liquid 276 bar

Page 22

SHUTTLECONTROLCONTROL

ANDDIRECTIONAL DIRECTION

CHERATED

FILTERS

(4,000 psi) Gas

MAX

WORKING

**PRESSURE** 





[1/4"] UP TO

552 BAR 8,000 PSI

The VFMF25 is a very fine flow metering valve, adjustable via a micrometer style handle. The valve is marked with preferred direction of flow, but it may be used in the opposite direction to provide directional speed control of a cylinder or actuator, although the level of metering will vary depending on direction.

ended to provide tight shut-off when closed.

I Very fine flow control valve for metering applications

- I Micrometer style adjustment with engraved graduations
- I Lockable adjustment
- I Non-rotating valve stem protects valve seat
- I Suitable for short term subsea use
- I Suitable for liquid or gas
- I Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- I Suitable for many other media. Contact us for advice
- I Cartridge and manifold mount versions available. Contact us for advice
- Various porting and seal options available

#### Specifications

#### BASIC MODEL VFMF25 **NUMBER** SYMBOL MAX WORKING 552 bar PRESSURE (LIQUID) (8,000 psi) MAX WORKING 276 bar PRESSURE (GAS) (4,000 psi) Up to 0.028 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases FLUID See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 1/4" 0.45 kg WEIGHT (1.0lb)

# OUTLET INLET

#### **Materials**


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and PTFE.


The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water and may be used with a wide variety of media compatible with the

Af construction. Other material options are available. Contact for adhrest and ard valve has Viton® seals. Further seal options are available via the Product of available via the Product Selector. Compatibility with the working fluidat the operating temperature must be considered.

#### Typical Performance

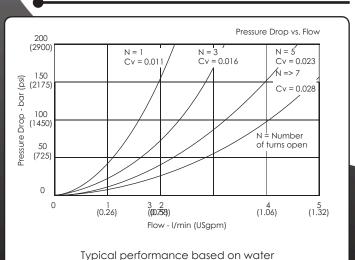

#### Installation Diagram




SHUTTLECONTROLCONTROL

ANDDIRECTIONAL DIRECTION

CHERATED

FILTERS

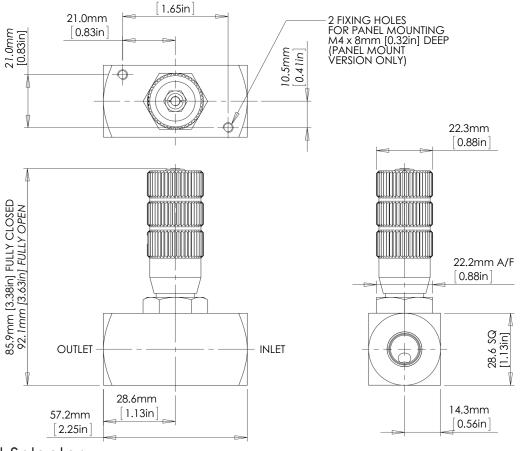

41.9mm

Product Selector VFMF25 P - PM - NBR - 8K MAX VALVE **PORTING VALVE SEAL TYPE OPTIONS OPTIONS OPTIONS** Leave blank ifnotrequired Leaveblank for Viton®seals -10°C to +120°C VFMF25 **NBR** 8K PM 1/4" BSPP female Nitrile seals 552 bar (8,000 psi) -30°C to +105°C **Panelmount** Liquid **HNBR** Ν 276 bar

1/4" NPT female Repair andseal kits are availableonrequest For a seal kitaddSK at the end of the modelcode and for a

Catalogue also available on digital media Visit our website for a full online search facility

www.bisvalves.co.uk

WORKING **PRESSURE** 

(4,000 psi)

Gas

Page 23

Hydrogenated Nitrile seals -20°Cto +120°C

EP EPDMseals -45°C to +120°C

KLZ

-25%@#@z+sb291sC Further seal options are available on request

Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered


The Specifier's Catalogue

RS VALVES

#### <u> — М</u>F37 <u> </u> METERING VALVE

3/8''

UP TO 552 BAR 8,000 PSI



The MF37 is a 3/8" nominal bore flow metering valve, adjustable via a micrometer style handle. The valve is preferred marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed

control of although the level metering will

depending on direction.

e that this valve is not intended to provide tight shut-off when closed.

- I Flow control valve for metering applications
- I Micrometer style adjustment with engraved graduations
- I Lockable adjustment
- I Non-rotating valve stem protects valve seat
- I Suitable for short term subsea use
- I Suitable for liquid or gas
- I Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- I Suitable for many other media. Contact us for advice
- I Panel mount versions available
- I Various porting options available
- I Various sealoptions available

#### **Specifications**

#### BASIC MODEL **MF37 NUMBER** SYMBOL MAX WORKING 552 bar PRESSURE (LIQUID) (8,000 psi) MAX WORKING 276 bar PRESSURE (GAS) (4,000 psi) Up to 0.65 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases FLUID See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 3/8" 0.4 kg WEIGHT (0.9 lb)

# OUTLET -INLET

#### **Materials**


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water and may be used with a wide variety of media compatible with the


Af construction. Other material options are available. Contact for adhrestandard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluidat the operatingtemperaturemust be considered.


#### Typical Performance

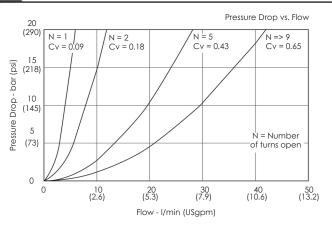


TypTicyapli cpael rpfoermrfoarmncaen bcea sbeads e

#### Installation Diagram

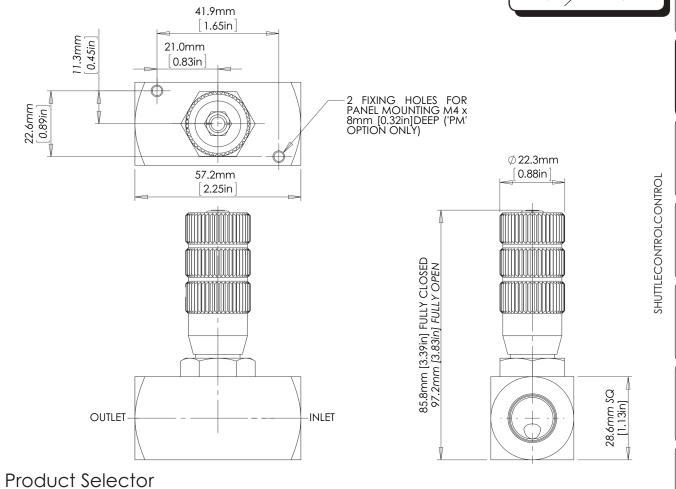

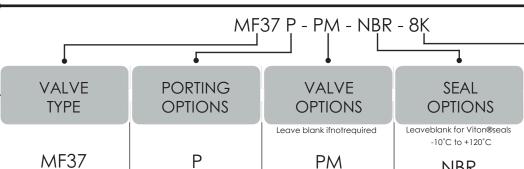

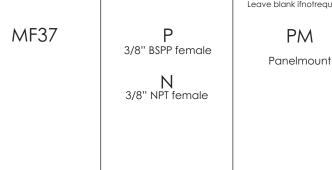

Repair andseal kits are availableonrequest For a seal kitaddSK at the end

of the modelcode and for a

www.bisvalves.co.uk

Catalogue also available on digital media Visit our website for a full online search facility NBR

Nitrile seals -30°C to+105°C **HNBR** 

> Hydrogenated Nitr**le** seals -20 PD 4015 & 200° C -45°C to+120°C

KLZ

-25°Cto +120°C Exposure to high and low fluid temperatures will influence handle temperature

Kalrez seals Operator safety must be consid ANDDIRECTIONAL DIRECTION

CHERRATED

FILTERS

MAX

WORKING

**PRESSURE** 

8K

552 bar (8,000 psi)

Liquid

276 bar

(4,000 psi)

Gas

Page 24



#### — MF50— METERING VALVE

1/2"

UP TO 552 BAR 8.000 PSI

> The MF50 is a 1/2" nominal bore flow metering valve, adjustable via a micrometer style handle. The valve marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed control of a cylinder or actuator, although the level metering will depending on direction.

Note that this valve is not intended to provide tight shut-off when closed.

- I Flow control valve for metering applications
- I Micrometer style adjustment with engraved graduations
- I Lockable adjustment
- I Non-rotating valve stem protects valve seat
- I Suitable for liquid or gas
- I Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- I Suitable for many other media. Contact us for advice
- I Panel mountable as standard
- I Various porting options available
- I Various sealoptionsavailable

#### Specifications

#### BASIC MODEL MF50 NUMBER SYMBOL MAX WORKING 552 bar PRESSURE (LIQUID) (8,000 psi) MAX WORKING 276 bar PRESSURE (GAS) (4,000 psi) Up to 1.4 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases FLUID See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 1/2" 2.0 kg WEIGHT (4.4 lb)

# OUTLET -INLET

#### Materials


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with air, nitrogen, sweet ggtural gas, mineral oil, water glycols and plain water, but may used with a wide variety of media compatible with the materials


construction. Other material options are available and for avide pstanse are higher than the Product Selector. Compatibility with the working fluidat the operating temperature must be considered.

#### Typical Performance

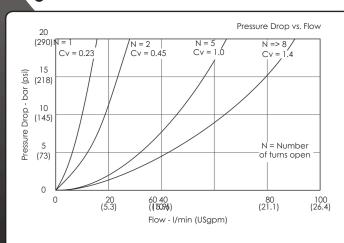

Typical performance based on water


#### Installation Diagram 76.2mm [3.00in]



ANDDIRECTIONAL DIRECTION

CHERATED

FILTERS

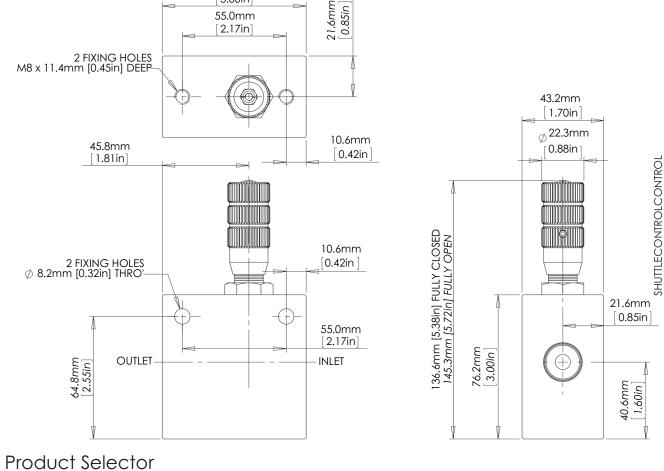

MF50 P - NBR - 8K **VALVE PORTING** TYPE **OPTIONS MF50** 1/2" BSPP female NBR Ν 1/2" NPT female

Repair and sealkits are available onrequest

For a seal kit addSKat the end of the

www.bisvalves.co.uk

model code andfora repair kit add RK

Catalogue also available on digital media Visitourwebsite forafull online search facility

SEAL **OPTIONS** Leaveblank for Viton® seals

-10°C to +120°C

Nitrile seals -30°Cto +105°C FP

**EPDMseals** -45°C to +120°C

KLZ Kalrez® seals -25°C to +120°C

Further seal options are available on request

temperatures will influence

MAX WORKING **PRESSURE** 

> **8K** 552 bar (isq 000,8) Liquid

276 bar (4,000 psi) Gas

**HNBR** 

HydrægendtedNatieseals

Exposure to high and low fluid handle temperature.

Operator safety must be considered

Page 25

The Specifier's Catalogue

#### — MF7.5— METERING VALVE

3/4"

UP TO 552 BAR 8,000 PSI

The MF75 is a 3/4" nominal bore flow metering valve, adjustable via a micrometer style handle. The valve marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed control of a cylinder or actuator, although the level metering will


depending on direction.

Note that this valve is not intended to provide tight shut-off when closed.

- I Flow control valve for metering applications
- I Micrometer style adjustment with engraved graduations
- I Lockable adjustment
- I Non-rotating valve stem protects valve seat
- I Suitable for liquid or gas
- I Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- I Suitable for many other media. Contact us for advice
- I Panel mountable as standard
- I Various porting options available
- I Various sealoptionsavailable

#### Specifications

#### BASIC MODEL MF75 NUMBER SYMBOL MAX WORKING 552 bar PRESSURE (LIQUID) (8,000 psi) MAX WORKING 276 bar PRESSURE (GAS) (4,000 psi) Up to 2.5 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases FLUID See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 3/4" 1.9 kg WEIGHT (4.1 lb)

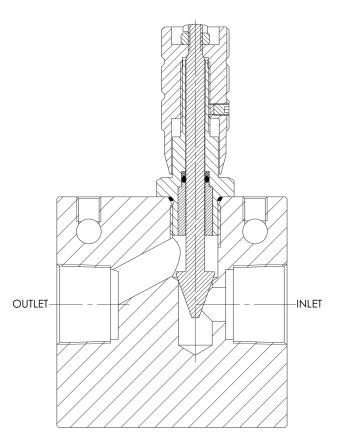

#### Materials


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with air, nitrogen, sweet ggtural gas, mineral oil, water glycols and plain water, but may used with a wide variety of media compatible with the materials


construction. Other material options are available and for avide pstanse are higher than the Product Selector. Compatibility with the working fluidat the operating temperature must be considered.

#### Typical Performance

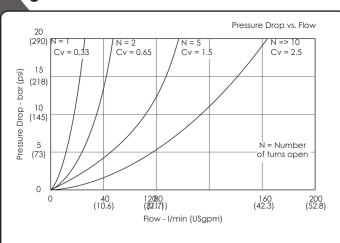

Typical performance based on water

#### Installation Diagram

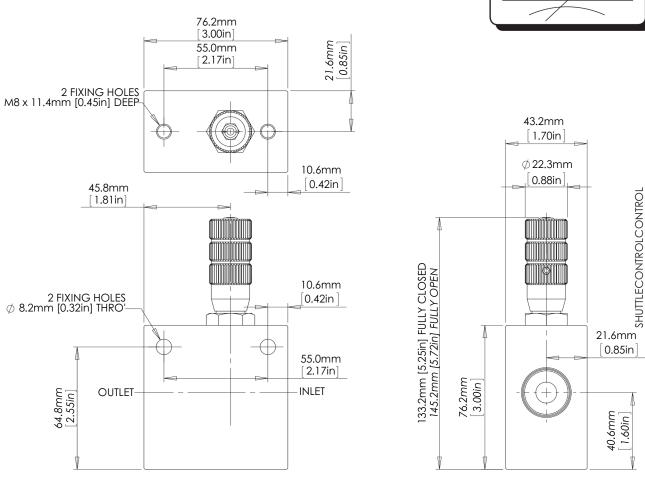

Product Selector

Repair and sealkits are available onrequest

For a seal kit addSKat the end of the

model code andfora repair kit add RK

www.bisvalves.co.uk

Catalogue also available on digital media Visitourwebsite forafull online search facility

MF75 P - NBR - 8K **VALVE PORTING** SEAL TYPE **OPTIONS OPTIONS** Leaveblank for Viton® seals -10°C to +120°C MF75 3/4" BSPP female NBR Nitrile seals Ν -30°Cto +105°C 3/4" NPT female FP **EPDMseals** -45°C to+120°C KLZ Kalrez® seals -25°C to+120°C

**HNBR** 

Further seal options are available on request

Exposure to high and low fluid temperatures will influence handle temperature.

Operator safety must be considered

MAX WORKING **PRESSURE** 

ANDDIRECTIONAL DIRECTION

CHERRATED

FILTERS

**8K** 552 bar (isq 000,8) Liquid

276 bar (4,000 psi) Gas

Page 26

Hydrægendted Allineseals

The Specifier's Catalogue

## METERING VALVE

1" P TO 552 BAR 8,000 PSI



The MF100 is a 1" nominal bore flow metering valve, adjustable via a micrometer style handle. The valve preferred marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed control of a cylinder or actuator, although the level metering will depending on direction.

Note that this valve is not intended to provide tight shut-off when closed.

- I Flow control valve for metering applications
- I Micrometer style adjustment with engraved graduations
- I Lockable adjustment
- I Non-rotating valve stem protects valve seat
- I Suitable for liquid or gas
- I Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- I Suitable for many other media. Contact us for advice
- I Panel mountable as standard
- I Various porting options available
- I Various sealoptionsavailable

#### Specifications

#### BASIC MODEL NUMBER

#### MF100

SYMBOL MAX WORKING 552 bar PRESSURE (LIQUID) (8,000 psi) MAX WORKING 276 bar PRESSURE (GAS) (4,000 psi) Up to 2.5 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases FLUID See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 

# OUTLET INLET


#### Materials

Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel. Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with air, nitrogen, sweet gatural gas, mineral oil, water glycols and plain water, but may used with a wide variety of media compatible with the materials


construction. Other material options are available and for advide, pstems date in the Product Selector. Compatibility with the working fluidat the operating temperature must be considered.

#### Typical Performance

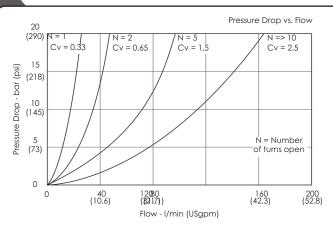

Typical performance based on water

## Installation Diagram

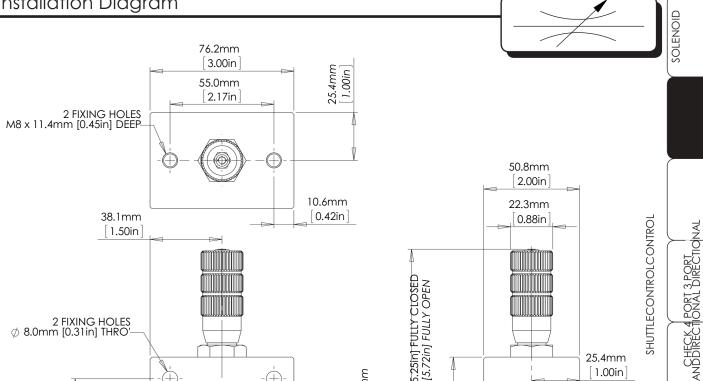

55.0mm

[2.17in]

MF100 P - NBR - 8K

INLET

Product Selector

Repair and sealkits are available

For a seal kit addSKat the end of the

model code andfora repair kit add RK

www.bisvalves.co.uk

Catalogue also available on digital media Visitourwebsite forafull online search facility

**OUTLET** 

2 FIXING HOLES  $\emptyset$  8.0mm [0.31in] THRO'-

**VALVE PORTING** SEAL TYPE **OPTIONS OPTIONS** Leaveblank for Viton® seals -10°C to +120°C MF100 Ρ 1" BSPPfemale NBR Nitrile seals Ν -30°Cto +105°C 1" NPTfemale FP **EPDMseals** -45°C to+120°C

KLZ Kalrez® seals -25°C to+120°C

**HNBR** 

Hydrægendted Allineseals

Exposure to high and low fluid temperatures will influence handle temperature.

MAX WORKING **PRESSURE** 

25.4mm

1.00in

. 1mm .50in]

CHERRATED

FILTERS

**8K** 552 bar (isq 000,8) Liquid

276 bar (4,000 psi) Gas

Further seal options are available on request

Operator safety must be considered

The Specifier's Catalogue



Specifications may change without notice

WEIGHT

2.1 kg

(4.6 lb)

#### - CMF25— METERING VALVE

/4" UP TO 552 BAR 8,000 PSI



ol valve and is not intended to

I Metering valve with reverse free-flow check feature

I Micrometer style adjustment with engraved graduations

I Non-rotating valve stem with lockable adjustment

I Ideal for uni-directional speed control

I Stainless steel construction suitable for liquid or gas

I Can be panel mounted

I Suitable for use with air, nitrogen, sweet natural gas,

mineral oils, water glycols and many other media

I NACE MR01-75 compliant version available

I Various porting options available. Manifold mounted version available on request


Various sealoptions available on request

#### Specifications

#### BASIC MODEL NUMBER

#### CMF25

SYMBOL	INLET OUTLET (METERED) (FREE FLOW)
MAX WORKING PRESSURE (LIQUID)	552 bar (8,000 psi)
MAX WORKING PRESSURE (GAS) CV (FLOW CAPACITY)	276 bar (4,000 psi) Up to 0.62 See Typical Performance Graph
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4"
CHECK ELEMENT CRACKING PRESSURE	0.2 - 0.5 bar (3 - 7 psi)
WEIGHT	0.70 kg

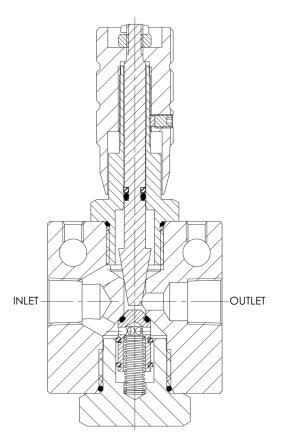


#### **Materials**

Externally Exposed Parts: 316, 302 and 17-4 PH stainless steel. Internally Wetted Parts: 316, 302 and 17-4 PH stainless steel, and acetal. The standard valve is designed for use with air, nitrogen,


ggtural gas, mineral oil, water glycols and plain water, but may used with a wide variety of media compatible with the materials

The standard valve has Vitonov sears, ruiller sear opinion of the standard valve has Vitonov sears, ruiller search opinions are available, and the reduct selector. adviceking वाज्यादम गार्ने वर्ष क्षेत्र वाज्यात कार्यात कार्य

#### Typical Performance

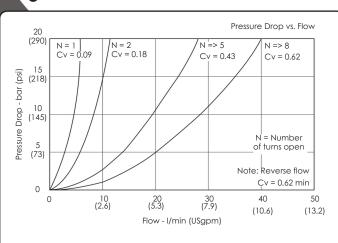

TypTicyapli cpael rpfoermrfoarmncaen bcea sbeads e

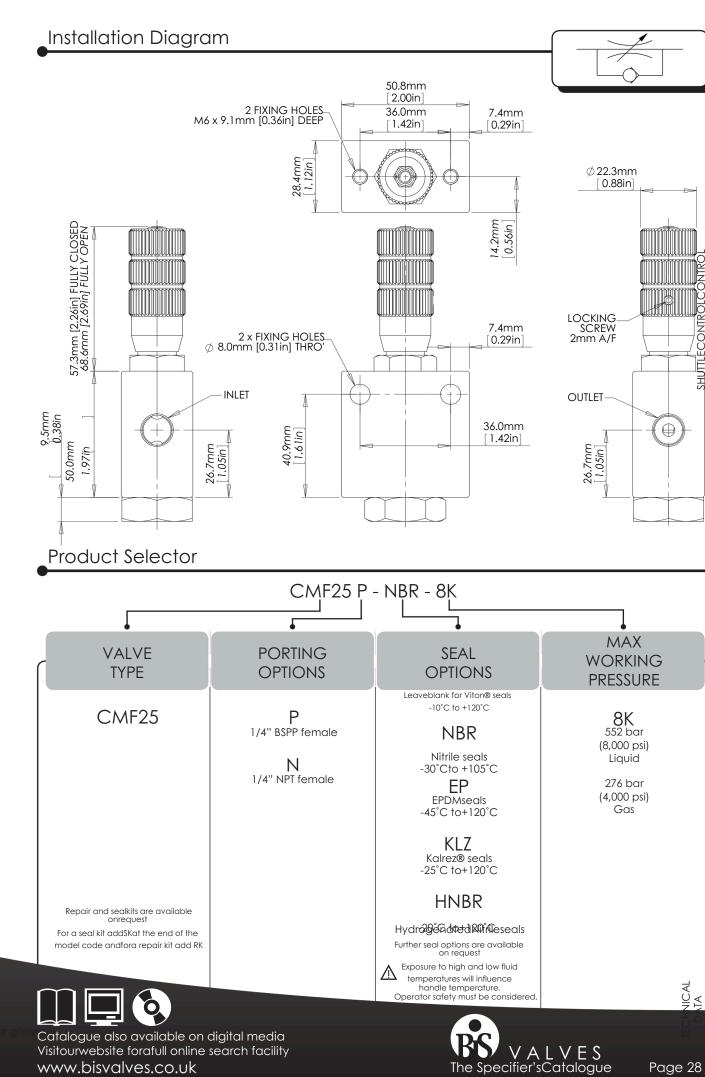

ANDDIRECTIONAL DIRECTION

CHECKATED

RELIEF

FIEXAMESS

FILTERS

PUMPS

Specifications may change without notice

(1.5 lb)

#### - CMF37— METERING VALVE

3/8" JP TO 552 BAR 8,000 PSI



ol valve and is not intended to

I Metering valve with reverse free-flow check feature

I Micrometer style adjustment with engraved graduations

I Non-rotating valve stem with lockable adjustment

I Ideal for uni-directional speed control

I Stainless steel construction suitable for liquid or gas

I Can be panel mounted

I Suitable for use with air, nitrogen, sweet natural gas,

mineral oils, water glycols and many other media

I NACE MR01-75 compliant version available

I Various porting options available. Manifold mounted version available on request


Various sealoptions available on request

#### Specifications

#### BASIC MODEL NUMBER

#### CMF37

SYMBOL	INLET OUTLET (FREE FLOW)
MAX WORKING PRESSURE (LIQUID)	552 bar (8,000 psi)
MAX WORKING PRESSURE (GAS)	276 bar (4,000 psi)
CV (FLOW CAPACITY)	Up to 0.62 See Typical Performance Graph
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	3/8"
CHECK ELEMENT CRACKING PRESSURE	0.2 - 0.5 bar (3 - 7 psi)
WEIGHT	0.70 kg (1.5 lb)

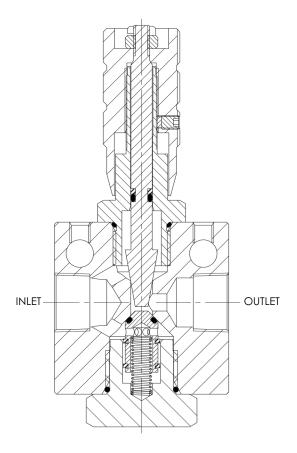


#### **Materials**

Externally Exposed Parts: 316, 302 and 17-4 PH stainless steel. Internally Wetted Parts: 316, 302 and 17-4 PH stainless steel, and acetal. The standard valve is designed for use with air, nitrogen,


gatural gas, mineral oil, water glycols and plain water, but may used with a wide variety of media compatible with the materials

The standard valve has Viton® seals. Further seal options are The standard valve has villone 350s. To the st adviceking वाज्यादम गार्ने वर्ष क्षेत्र वाज्यात कार्यात कार्य

#### Typical Performance

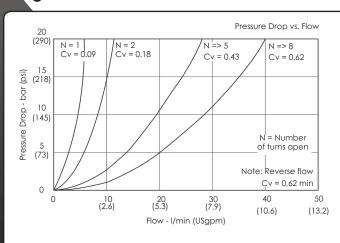

TypTicyapli cpael rpfoermrfoarmncaen bcea sbeads e

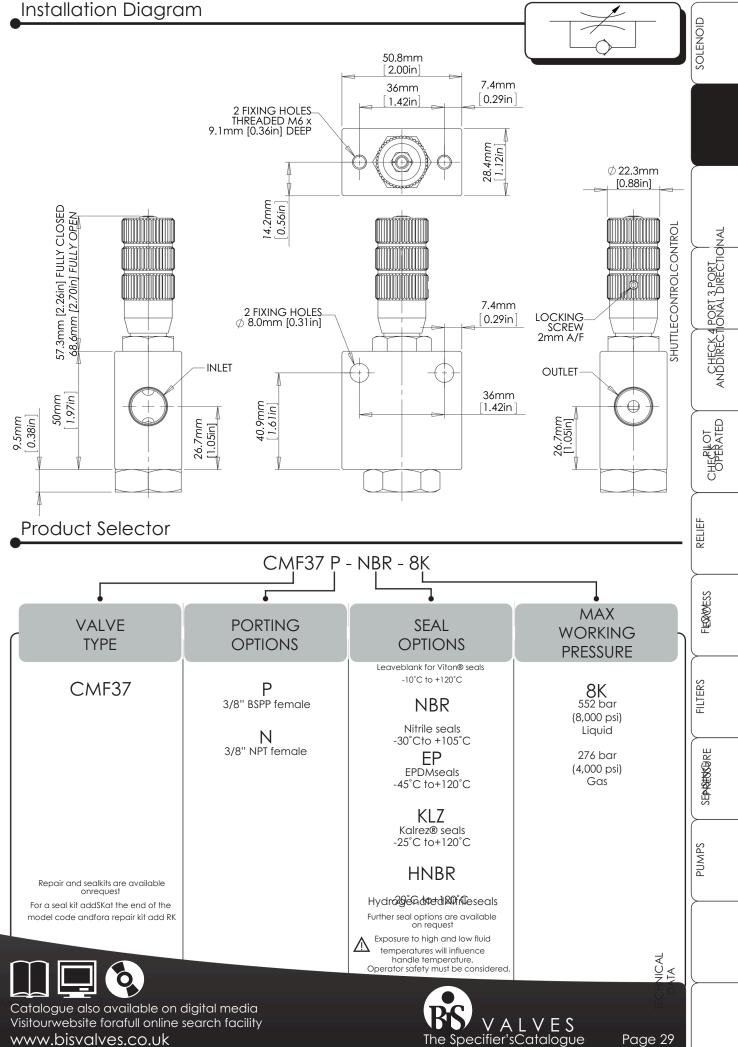

#### — CMF50— METERING VALVE

1/2" IP TO 414 BAR 6,000 PSI



rol valve and is not intended to

provide tight shut-off when closed.

I Metering valve with reverse free-flow check feature

I Micrometer style adjustment with engraved graduations

I Non-rotating valve stem with lockable adjustment

I Ideal for uni-directional speed control

I Stainless steel construction suitable for liquid or gas

I Can be panel mounted

I Suitable for use with air, nitrogen, sweet natural gas,

mineral oils, water glycols and plain water


I Suitable for many other media. Contact us for advice

I Various porting options available

I Various sealoptions available on request

#### **Specifications**

#### BASIC MODEL CMF50 **NUMBER** (METERED) (FREE FLOW) SYMBOL MAX WORKING 414 bar (6,000 psi) PRESSURE (LIQUID) MAX WORKING 207 bar PRESSURE (GAS) (3,000 psi) Up to 1.4 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases **FLUID** See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 1/2" **CHECK ELEMENT** 0.1 - 0.3 bar CRACKING PRESSURE (2 - 5 psi) 2.0 kg WEIGHT (4.4 lb)

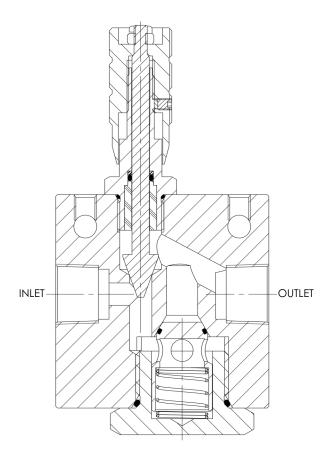


#### Materials


Externally Exposed Parts: 316, 302 and 17-4 PH stainless steel. Internally Wetted Parts: 316, 302 and 17-4 PH stainless steel, and acetal. The standard valve is designed for use with air, nitrogen,

pgtural gas, mineral oil, water glycols and plain water, but may used with a wide variety of media compatible with the materials

of The standard valve has Viton® seals. Further seal options are available and for advice king assume the product selector. Compatibility with the advice king assume the observating temperature must be considered.

#### Typical Performance

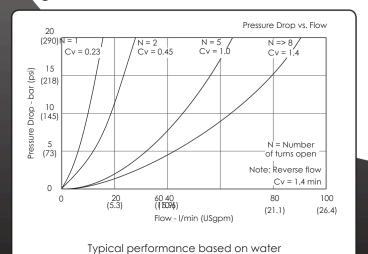

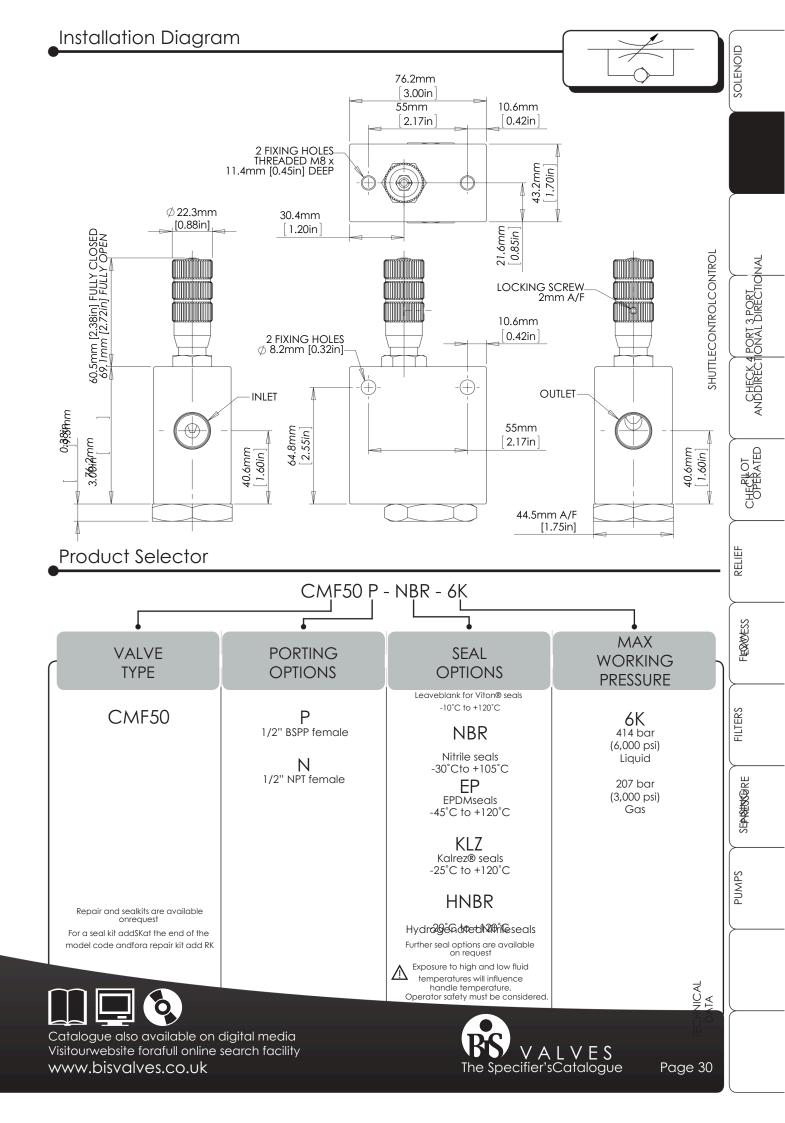

#### -CMF75-METERING VALVE

3/4" <u>IP TO 4</u>14 BAR 6,000 PSI



ol valve and is not intended to

nut-off when closed.

I Metering valve with reverse free-flow check feature

I Micrometer style adjustment with engraved graduations

I Non-rotating valve stem with lockable adjustment

I Ideal for uni-directional speed control

I Stainless steel construction suitable for liquid or gas

I Can be panel mounted

I Suitable for use with air, nitrogen, sweet natural gas,


mineral oils, water glycols and plain water I Suitable for many other media. Contact us for advice

I Various porting options available

I Various sealoptions available on request

#### **Specifications**

#### BASIC MODEL CMF75 **NUMBER** (FREE FLOW) SYMBOL (METERED) MAX WORKING 414 bar (6,000 psi) PRESSURE (LIQUID) MAX WORKING 207 bar PRESSURE (GAS) (3,000 psi) Up to 2.5 CV (FLOW CAPACITY) See Typical Performance Graph Liquids and Gases **FLUID** See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section **PORT SIZE** 3/4" **CHECK ELEMENT** 0.4 - 0.7 bar CRACKING PRESSURE (6 - 10 psi) 1.9 kg WEIGHT (4.3 lb)

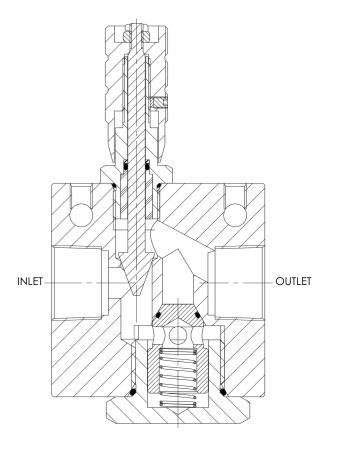


#### **Materials**

Externally Exposed Parts: 316, 302 and 17-4 PH stainless steel. Internally Wetted Parts: 316, 302 and 17-4 PH stainless steel, and acetal. The standard valve is designed for use with air, nitrogen,


ggtural gas, mineral oil, water glycols and plain water, but may used with a wide variety of media compatible with the materials

of The standard valve has Viton® seais. Further search options are available and for the ravailable via the Product Selector. Compatibility with the via the Product Selector. Compatibility with the considered. adviceking वाज्यादम गार्ने वर्ष क्षेत्र वाज्यात कार्यात कार्य

#### Typical Performance

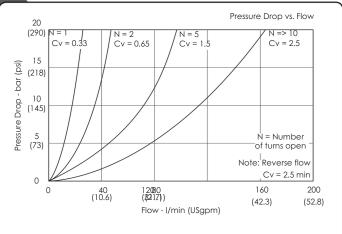

Typical performance based on water

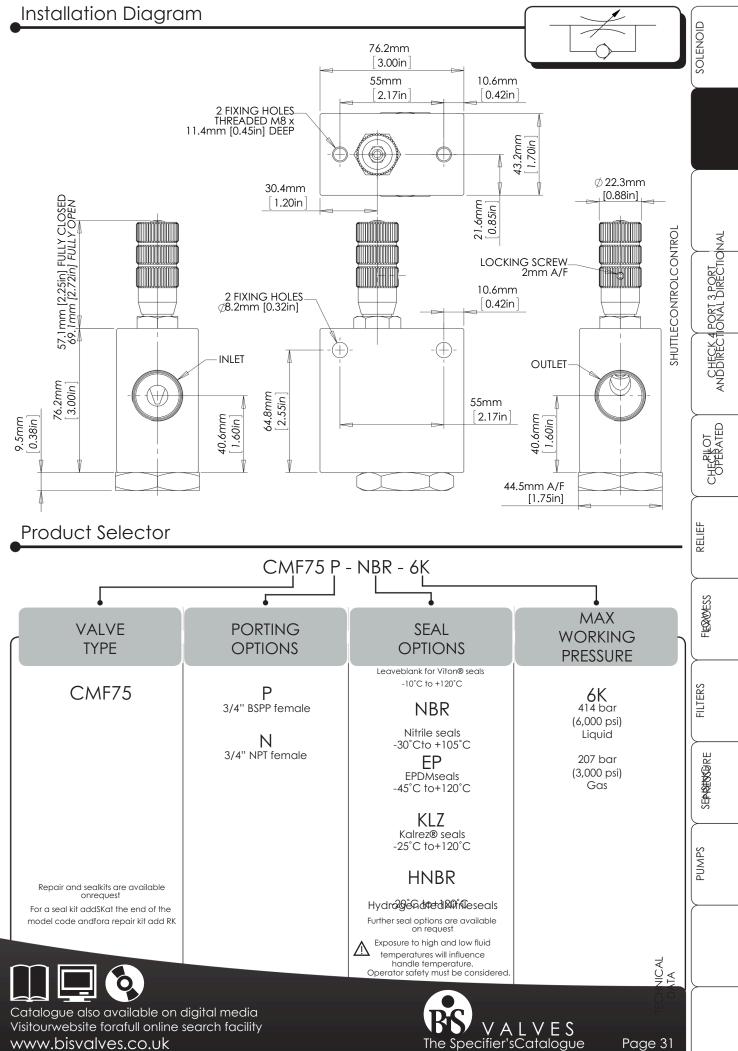

#### -CMF100-METERING VALVE

UP TO 414 BAR 6,000 PSI



nirol valve and is not intended to

provide tight shut-off when closed.

I Metering valve with reverse free-flow check feature

I Micrometer style adjustment with engraved graduations

I Non-rotating valve stem with lockable adjustment

I Ideal for uni-directional speed control

I Stainless steel construction suitable for liquid or gas

I Can be panel mounted

I Suitable for use with air, nitrogen, sweet natural gas,

mineral oils, water glycols and plain water

I Suitable for many other media. Contact us for advice


I Various porting options available

I Various sealoptions available on request

#### **Specifications**

# BASIC MODEL NUMBER CMF100 SYMBOL (METERED) (FREE FLOW)

MAX WORKING PRESSURE (LIQUID)	414 bar (6,000 psi)
MAX WORKING PRESSURE (GAS)	207 bar (3,000 psi)
CV (FLOW CAPACITY)	Up to 2.5  See Typical Performance Graph
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1"
CHECK ELEMENT CRACKING PRESSURE	0.4 - 0.7 bar (6 - 10 psi)

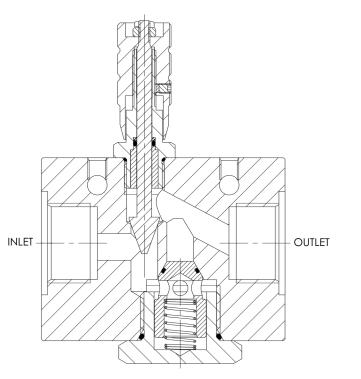

0.**3**8inm


#### Materials


Externally Exposed Parts: 316, 302 and 17-4 PH stainless steel. Internally Wetted Parts: 316, 302 and 17-4 PH stainless steel, and acetal. The standard valve is designed for use with air, nitrogen,

pgtural gas, mineral oil, water glycols and plain water, but may used with a wide variety of media compatible with the materials

The standard valve has Viton® seals. Further seal options are available and for advice validable via the Product Selector. Compatibility with the advice via the product selector.

#### Typical Performance

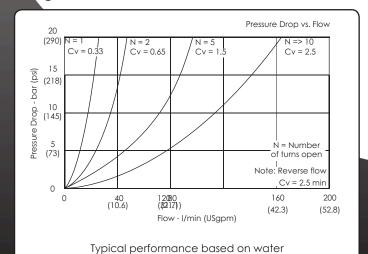

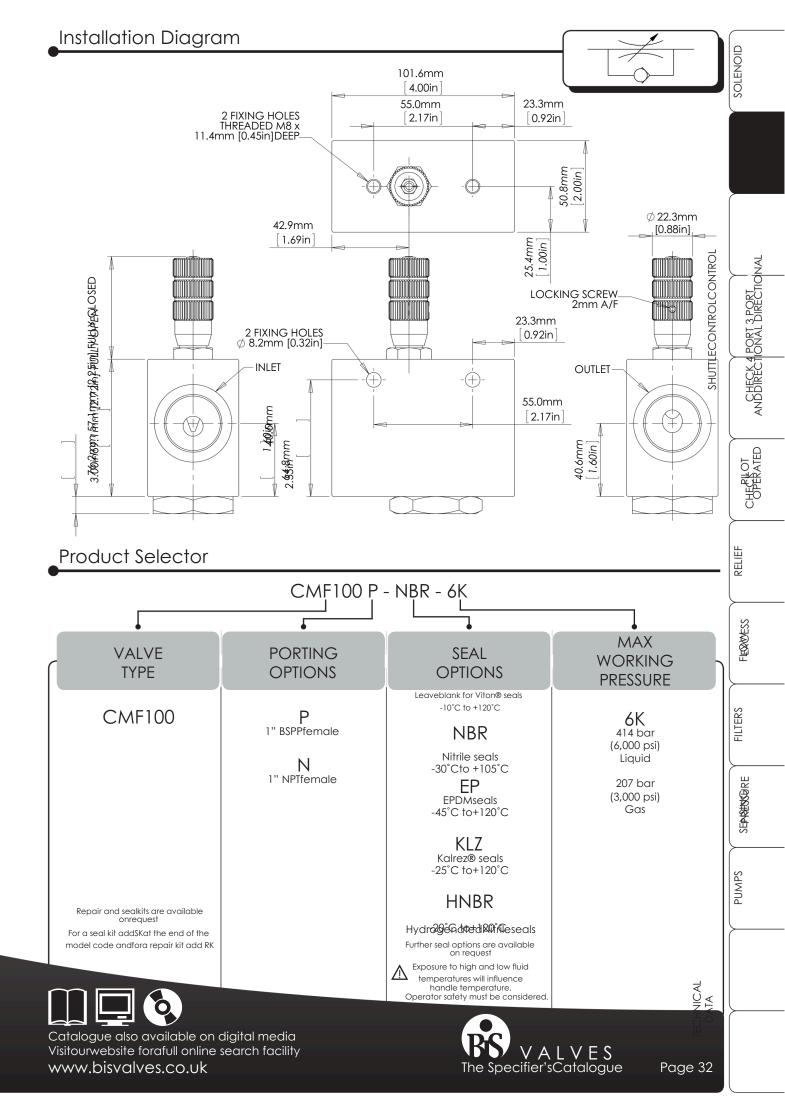

Specifications may change without notice

WEIGHT

2.9 kg

(6.4 lb)

## METERING VALVE

1/4"

UP TO 552 BAR 8,000 PSI



The IMC25 is a 1/4" nominal bore metering valve with a free-flow check reverse function. It provides metered flow in one direction, and free flow in the opposite direction. It ideal for uni-directional speed control of a cylinder or actuator. The valve may also be referred to as a flow control

provide tight shut-off.

- I Metering valve with reverse free-flow check feature
- I Inline design with barrel style adjustment offers maximum space efficiency
- I Lockable adjustment
- I Ideal for uni-directional speed control
- I Stainless steel construction
- I Variants can be tailor-made to suit specific metering characteristics. Contact us for advice
- I Suitable for use with mineral oils, water glycols and plain
- I Suitable for many other media, contact us for advice
- I Various porting options available
- I Various sealoptionsavailable

#### **Specifications**

## BASIC MODEL

#### MC25

NUMBER	1141025
SYMBOL	INLET INLET (METERED) (FREE FLOW)
MAX WORKING PRESSURE (LIQUID)	552 bar (8,000 psi)
CV (FLOW CAPACITY)	Up to 0.55 (Metered) 1.1 (Free flow) See Typical Performance Graph
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4"
CHECK ELEMENT CRACKING PRESSURE	0.1 - 0.3 bar (2 - 5 psi)
WEIGHT	0.45 kg

# INLET (METERED FLOW)

#### Materials

Externally Exposed Parts: 316 Stainless Steel with a 400 Series Stainless Steel adjustment stop circlip.

Internally Wetted Parts: 316 and 302 Stainless Steel and Acetal.


INLET (FREE FLOW)

The standard valve is designed for use with mineral oils, water

plain water and may also be used with a wide variety of compatible with the materials of construction. Please contact us The standard valve has Viton® seals. Further seal options are Ceandiaple sie the Broduct Selector Geome retailite with the


working fluidat the operating temperature must be considered.

#### Typical Performance

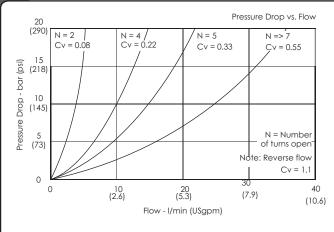

Typical performance based on water

#### Installation Diagram




SHUTTLECONTROLCONTROL

ANDDIRECTIONAL DIRECTION

CHERATED

FILTERS

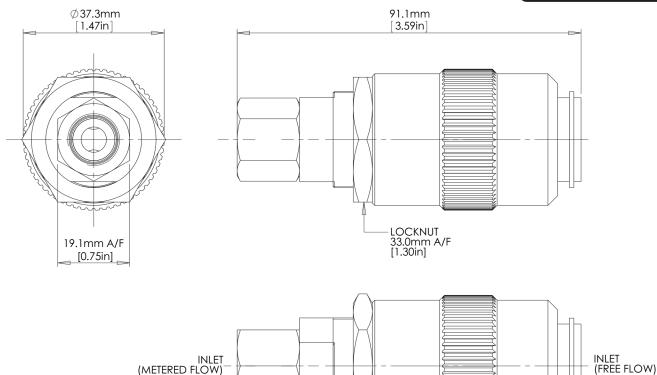

IMC25 P - NBR - 8K

**Product Selector** 

Repair and sealkits are available onrequest
For a seal kit addSKat the end of the

www.bisvalves.co.uk

Catalogue also available on digital media Visitourwebsite forafull online search facility

VALVE **PORTING** TYPE **OPTIONS** IMC25

1/4" BSPP female

1/4" NPT female

SEAL **OPTIONS** 

Leaveblank for Viton® seals -10°C to +120°C NBR

Nitrile seals -30°Cto +105°C

EP EPDM seals -45°C to+120°C

KLZ

Kalrez® seals -25°C to+120°C

**HNBR** 

HydrogenætedMitrileseals Expos20e 6 hoth b20 6 w fluid

MAX WORKING **PRESSURE** 

> **8K** 552 bar (8,000 psi)

Liquid

Exposible to Math bible Town fluid
Furthernseraprisms wild flowarizable handle temperature.
Operator safety must be considered

The Specifier's Catalogue



Specifications may change without notice

(1.0 lb)

## — IMC37— METERING VALVE

3/8"

UP TO 552 BAR 8,000 PSI



The IMC37 is a 3/8" nominal bore metering valve with a reverse free-flow check function. It provides metered flow in one direction, and free flow in the opposite direction. It is ideal for uni-directional speed control of a cylinder or actuator. The valve may also be referred to as a flow control valve.

Note that this valve does not provide tight shut-off.

- I Metering valve with reverse free-flow check feature
- I Inline design with barrel style adjustment offers maximum space efficiency
- I Lockable adjustment
- I Ideal for uni-directional speed control
- I Stainless steel construction
- I Variants can be tailor-made to suit specific metering characteristics. Contact us for advice
- I Suitable for use with mineral oils, water glycols and plain water
- I Suitable for many other media, contact us for advice
- I Various porting options available
- l Various sealoptionsavailable

#### **Specifications**

#### BASIC MODEL NUMBER

#### IMC37

SYMBOL INLET INLET (FREE FLOW)

MAX WORKING 552 bar

MAX WORKING PRESSURE (LIQUID)

(8,000 psi)

CV (FLOW CAPACITY)

Up to 0.72 (Metered)
1.45 (Free flow)
See Typical Performance Graph

FLUID

Liquids only
See materials section

TEMPERATURE RANGE

See Product Selector opposite and Technical Data section

**PORT SIZE** 

3/8"


CHECK ELEMENT
CRACKING PRESSURE

0.1 - 0.3 bar (2 - 5 psi)

WEIGHT

0.75 kg (1.7 lb)

Specifications may change without notice

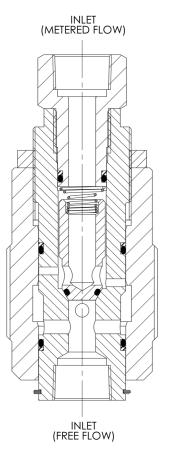

#### Materials

ExternallyExposed Parts: 316 Stainless Steel with a 302 Stainless Steel adjustment stop circlip.


Internally Wetted Parts: 316 and 302 Stainless Steel and Acetal.

The standard valve is designed for use with mineral oils, water

plain water and may also be used with a wide variety of compatible with the materials of construction. Please contact us The standard valve has Viton® seals. Further seal options are


advice awailablifixing the organization of the considered working fluid at the operating temperature must be considered.


#### Typical Performance

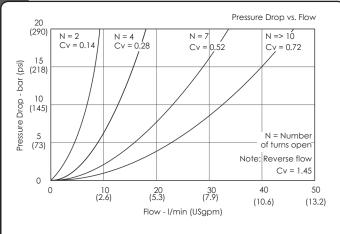

Typical performance based on water

#### Installation Diagram



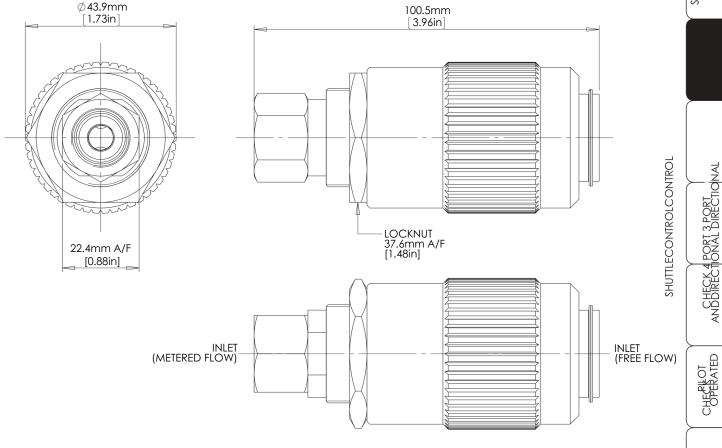

IMC37 P - NBR - 8K

Product Selector

VALVE

TYPE

IMC37

Repair and sealkits are available

onrequest
For a seal kit add\$Kat the end of the

www.bisvalves.co.uk

Catalogue also available on digital media Visitourwebsite forafull online search facility

PORTING OPTIONS

> P 3/8" BSPP female

N 3/8" NPT female -10°C to +120°C

NBR

Nitrile seals
-30°C to +105°C

EP

EPDMseals -45°C to+120°C KLZ

SEAL

**OPTIONS** 

Leaveblank for Viton® seals

Kalrez® seals -25°C to+120°C HNBR

HydrogenatedNitrileseals -20°C to+120°C

Further seal options are available on request

Exposure to high and low fluid temperatures will influence handle temperature.

Operator safety must be considered.

MAX WORKING PRESSURE

> **8K** 552 bar (8,000 psi) Liquid

PUMPS

FILTERS

CHNICAL



## METERING VALVE

1/2"

UP TO 552 BAR 8,000 PSI



The IMC50 is a 1/2" nominal bore metering valve with a free-flow check reverse function. It provides metered flow in one direction, and free flow in the opposite direction. It is ideal for uni-directional speed control of a cylinder or actuator. The valve may also be referred to as a flow control

t provide tight shut-off.

- I Metering valve with reverse free-flow check feature
- I Inline design with barrel style adjustment offers maximum space efficiency
- I Lockable adjustment
- I Ideal for uni-directional speed control
- I Stainless steel construction
- I Variants can be tailor-made to suit specific metering characteristics. Contact us for advice
- I Suitable for use with mineral oils, water glycols and plain
- I Suitable for many other media, contact us for advice
- I Various porting options available
- I Various sealoptionsavailable

#### **Specifications**

# BASIC MODEL

#### MC50

NUMBER	11/1000
SYMBOL	INLET INLET (METERED) (FREE FLOW)
MAX WORKING PRESSURE (LIQUID)	552 bar (8,000 psi)
CV (FLOW CAPACITY)	Up to 1.2 (Metered) 3.0 (Free flow) See Typical Performance Graph
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/2"
CHECK ELEMENT	0.1 - 0.3 bar (2 - 5 psi)

Specifications may change without notice

# INLET (METERED FLOW) (FREE FLOW)

#### Materials

Externally Exposed Parts: 316 Stainless Steel with a 302 Series Stainless Steel adjustment stop circlip.


Internally Wetted Parts: 316 and 302 Stainless Steel and Acetal.

The standard valve is designed for use with mineral oils, water

plain water and may also be used with a wide variety of compatible with the materials of construction. Please contact us The standard valve has Viton® seals. Further seal options are advice wall able to the Braduat Selector Gome at bility with the


working fluidat the operating temperature must be considered.


#### Typical Performance

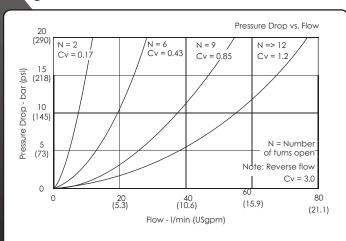

Typical performance based on water

#### Installation Diagram



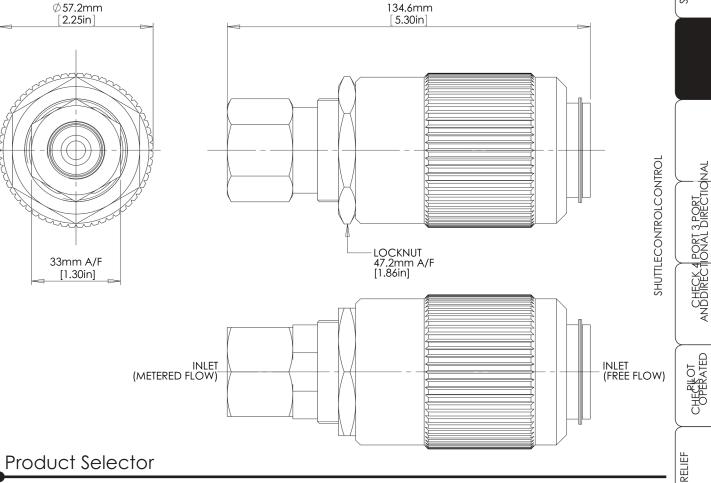

IMC50 P - NBR - 8K

VALVE **PORTING** TYPE **OPTIONS** 

IMC50 1/2" BSPP female

> Ν 1/2" NPT female

Repair and sealkits are available onrequest
For a seal kit add\$Kat the end of the

Catalogue also available on digital media Visitourwebsite forafull online search facility

www.bisvalves.co.uk

SEAL **OPTIONS** 

Leaveblank for Viton® seals -10°C to +120°C

NBR

Nitrile seals -30°Cto +105°C

ΕP **EPDMseals** -45°C to+120°C

KLZ Kalrez® seals -25°C to+120°C

**HNBR** 

Hydrægendred Rithereals Further seal options are available on request

Exposure to high and low fluid temperatures will influence handle temperature.

Operator safety must be considered

MAX WORKING **PRESSURE** 

> **8K** 552 bar (isq 000,8) Liquid

FIEXAMESS

FILTERS

Page 35





WEIGHT

1.25 kg

(2.8 lb)

#### PCFR50-FLOW REGULATOR

1/2"3/8"

UP TO 6,88 BAS



The PCFR50 is a pressure compensated flow control valve. Unlike a standard metering valve, the PCFR50 provides a relatively constant flow in one direction, regardless of the pressure differential across the valve, and is ideal for providing constant speed control of functions that have variable loads. In reverse, the valve will open to allow non-metered reverse


ssure of approximately 7 bar (102

psi) or 2 bar (29 psi) for LF versions is exceeded, and below this pressure will provide non-pressure compensated metered flow. This valve does not provide tight shut-off when closed.

- I Pressure compensated flow control valve
- I Adjustable flow setting with locking feature
- I Ideal for uni-directional speed control with variable loads or supply pressures
- I Stainless steel construction
- I Suitable for use with mineral oils and water glycols and many other media, contact us for advice
- I Subsea variant available, contact us for advice
- I Various porting optionsavailable, including a cartridge version for use in manifolds

#### **Specifications**

#### BASIC MODEL PCFR50 **NUMBER** OUTLET SYMBOL MAX WORKING 690 bar (10,000 psi) PRESSURE (LIQUID) 414 bar **MAXIMUM** (6,000 psi) DIFFERENTIAL PRESSURE 15 bar MINIMUM (218 psi) When operated below this differential pressu flow rate will not be pressure compensated DIFFERENTIAL PRESSURE 5-45 l/min (1.3 - 11.9 USgpm) **REGULATED FLOW** For lower flows, see LF version in SETTING RANGE Product Selector opposite Liquids only **FLUID** See materials section See Product Selector opposite TEMPERATURE RANGE and Technical Data section 1/2" or 3/8" **PORT SIZE** See Product Selector opposite Standard 2.8 kg (6.2 lb) WEIGHT PCFR50C 0.35 kg (0.8 lb)

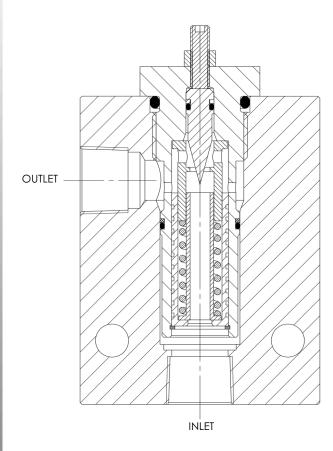

#### **Materials**

Externally Exposed Parts: 316 and 304 stainless steel. Internally Wetted Parts: 316, 302, 431 and 440C stainless steel and acetal for the standard valve. 316, 302, 17-4 PH, acetal and aluminium bronze for the water duty version.


The standard valve is designed for use with non-corrosive

#### auids

only such as mineral oil and water glycol. A water duty is available for use in plain water systems. Contact us for


adviage standard valve has Viton® seals. Further seal options are where use with more corrosive fluids is required, available via the Product selector. Compatibility with the working fluidat the operating temperaturemust be considered.

#### Typical Performance

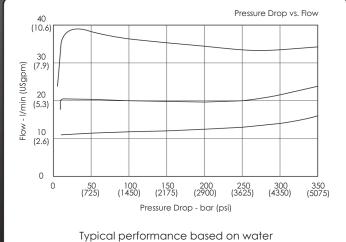

#### Installation Diagram


Product Selector



ANDDIRECTONAL DIRECT

CHERATED

FILTERS

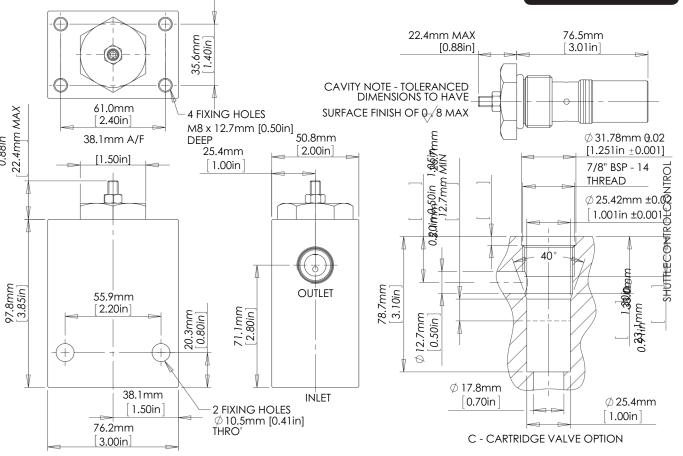

VALVE TYPE PORTING OPTIONS COLEAVED LEAVED L

1/2" BSPP female

N
1/2" NPT female

/37P
3/8" BSPP female

Any con

Repair andseal kits are availableon request For a seal kitadd SK at the end of the model code and

**LF**Low flow
2 - 15 L/Min
(0.5 - 4.0 USgpm)

WD Water Duty

Any combination of options is allowable

SEAL OPTIONS MAX

WORKING

**PRESSURE** 

10K

690bar

(10,000psi)

Liquid

Page 36

Leaveblank for Viton® seals -10°C to +120°C

NBR Nitrile seals -30°C to+105°C

EPDM seals -45°Cto +120°C Onlyavailablewiththe WD option

KLZ Kalrez® seals -25°C to+120°C

HNBR Hydrogenated

Nitrile seals -20°C to +120°C

Further seal options are available on request



Catalogue also available on digital media Visitourwebsite forafull online search facility www.bisvalves.co.uk

for a repairkit add RK



#### <u>Terms and Conditions—</u>

BiS Valves Ltd., Units 17-23 Kingfisher Park, West Moors, Wimborne, Dorset, BH21 6US, United Kingdom

#### TERMS AND CONDITIONS Rev: 3

- Definitions. In these Conditions, the following definitions apply:

'Business Day' means a day (other than a Saturday, Sunday or public holiday) when banks in London are open for business.

'Buyer' means the person or firm who accepts a quotation of the Seller for the sale of the goods or whose order for the goods is accepted by the Seller.
'Conditions' means the standard terms and conditions of sale set out in this document as amended from time to time and (unless the context otherwise requires) includes any special

terms and conditions agreed in writing between the Buyer and the Seller.
'Contract' means the contract between the Seller and the Buyer for the sale and purchase of the Goods in accordance with these conditions.

'Force Majure' Event has the meaning given in clause 10.

'Goods' means the goods (including any installment of the goods or any parts for them) which the Seller is to supply in accordance with these Conditions. 'Order' means the Buyer's Order for the Goods.

'Seller' means BiS Valves Limited (registered in England and Wales with Company Number 826821)
'Specification' means any specification for the Goods, including any related plans and drawings that are agreed in writing by the Buyer and the Seller 'Writing' includes facsimile transmission email and any comparable means of communication.

- Construction. In these Conditions, the following rules apply:

  - 1.2.1 The headings in these Conditions are for convenience only and shall not affect their interpretation.
    1.2.2 A person includes a natural person, corporate or unincorporated body (whether or not having a separate legal personality).
  - 1.2.3 A reference to a party includes its personal representatives, successors or permitted assigns.
  - 1.2.4 A reference to a statute or statutory provision is a reference to such statute or provision as amended or re-enacted. A reference to a statute or statutory provision includes

any subordinate legislation made under that statute or statutory provision, as amended or re-enacted.

- 1.2.5 Any phrase introduced by the terms including, include, in particular or any similar expression shall be construed as illustrative and shall not limit the sense of the words
- BASIS OF THE CONTRACT These Conditions apply to the Contract to the exclusion of any other terms that the Buyer seeks to impose or incorporate, or which are implied by trade, custom, practice or course of dealing. The Order constitutes an offer by the Buyer to purchase the Goods in accordance with these Conditions. The Buyer is responsible for ensuring that the terms of the Order are complete and accurate and for giving the Seller any and all necessary information relating to the Goods within a reasonable time to enable the Seller to perform the Contract in accordance with its terms. No variation to these Conditions shall be binding unless agreed in writing between the authorised representatives of the Buyer and the Seller. The Contract constitutes the entire agreement between the parties. The Buyer acknowledges that it has not relied on any statement, promise or representation made or given by or on behalf of the Seller which is not set out in the Contract. Any samples, drawings, descriptive matter, or advertising produced by the Seller and any descriptions or illustrations contained in the Seller's catalogues or brochures are produced for the sole purpose of giving an approximate idea of the Goods described in them. They shall not form part of the Contract or have any contractual force. A quotation for the Goods given by the Seller shall not constitute an offer and shall only be valid for a period of 90 days from its date of issue. ORDERS AND SPECIFICATIONS No Order submitted by the Buyer shall be deemed to be accepted by the Seller unless and until confirmed in
- writing by the Seller's authorised representative. The quantity, quality and description of and any Specification for the Goods shall be those set out in the Seller's quotation (if accepted by the Buyer) or the Buyer's order (if accepted by the Seller). To the extent that the Goods are to be manufactured in accordance with a Specification supplied by the Buyer, the Buyer shall indemnify the Seller against all liabilities, costs, expenses, damages and losses (including any direct, indirect or consequential losses, loss of profit, loss of reputation and all interest, penalties and legal and other professional costs and expenses) suffered or incurred by the Seller in connection with any claim made against the Seller for actual or alleged infringement of any third party's intellectual property rights arising out of or in connection with the Seller's use of the Specification. This clause 3 shall survive termination of the Contract. The Seller reserves the right to amend the Specification of the Goods if required by any applicable statutory or regulatory requirements. No Order which has been accepted by the Seller may be cancelled by the Buyer except with the agreement in writing of the Seller and on terms that the Buyer shall indemnify the Seller in full against all loss (including loss of profit) costs (including the cost of all labour and materials used) damages charges and expenses incurred by the Seller as the result of cancellation. PRICE OF THE GOODS The price of the Goods shall be the price set out in the Seller's quotation, or, in the case of an Order placed without a prior quotation from the Seller the price shall be as per the Sellers most up to date price list. Where the Goods are supplied for export from the United Kingdom the Seller's published export price list shall apply. All prices quoted are valid for 90 days only or until earlier acceptance by the Buyer after which time they may be altered by the Seller without giving notice to the Buyer. All orders are subject to a minimum order charge. The Seller may, by giving notice to the Buyer at any time up to 30 Business Days before delivery, increase the price of the Goods to
- reflect any increase in the cost of the Goods that is due to: 4.3.1 any factor beyond the Seller's control (including foreign exchange fluctuations, increases in taxes and duties, and 3.3

- 4.3
  - other manufacturing costs);

The Specifier'sCatalogue

- 4.3.2 any request by the Buyer to change the delivery date(s), quantities or types of Goods ordered, or the Specification; or 4.3.3 any delay caused by any instructions of the Buyer or failure of the Buyer to give the Seller adequate or accurate information or instructions.

- Except as otherwise agreed in writing between the Buyer and Seller the price of the Goods is on an ex-works basis and is exclusive of the costs and charges of packaging, carriage freight insurance and transport of the Goods which shall be invoiced to the Buyer. The Seller will use its reasonable endeavours to include the costs of [packaging, carriage, freight, [insurance] and transport] in any quotation provided to the Buyer. The price of the Goods is exclusive of amounts in respect of value added tax (VAT). The Buyer shall, on receipt of a valid VAT invoice from the Seller, pay to the Seller such additional amounts in respect of VAT as are chargeable on the supply of
- The cost of pallets and return of containers will be charged to the Buyer in addition to the price of the Goods but full credit will be given to the Buyer provided they are returned undamaged to the Seller before the due payment date. TERMS OF PAYMENT Subject to any special terms agreed in writing between the Buyer and the Seller shall be entitled to invoice the Buyer for the price of the goods are to be collected by the Buyer or the Buyer and the Seller shall be entitled to invoice the Buyer for the price at any time after the Seller has notified the Buyer that the Goods are beady for collection or the Seller has tendered delivery of the Goods. The Buyer shall pay the invoice in the manner detailed on the invoice in full and cleared funds on or Selfole the last working day of the month following the date of invoice. The Seller shall be entitled to recover the invoice amount notwithstanding that delivery may not have taken place and that the property and the Goods have not passed to the Buyer. Time of payment is of the essence. If the Buyer fails to make any payment on the due date then without prejudice to any other right or remedy available to the Seller the Seller shall be entitled to: 5.3.1 cancel the Contract or suspend any further designation to the Buyer; 5.3.2 appropriate any payment made by the Buyer to such of the Goods (or the Goods supplied under any other contract between the Buyer and the Seller) as the Seller
- 5.2

may see fit (notwithstanding any purported appropriation by the Buyer) and

5.3.3 charge the Buyer interest (both before and after any judgment) on the amount unpaid at the rate of 4% per cent per annum above Bank of England base rate of varied from time to time. Such interest shall accrue on a daily basis from the due date until the date of actual payment of the overdue amount, whether before or after judgment. The Buyer shall pay the interest together with the overdue amount.

- The Buyer shall also reimburse the Seller all costs and expenses (including legal costs) incurred in the collection of any overdue amount. The Buyer shall pay all amounts due under the Contract in full without any deduction or withholding except as required by law and the Buyer shall not be entitled to assert any credit, set-off or counterclaim against the Seller in order to justify withholding payment of any such amount in whole or in part. The Seller may at any time, without limiting any other rights or remedies it may have, set off any amount owing to it by the Buyer against any amount payable by the Seller to the Buyer. DELIVERY The Buyer shall collect the Goods from the Seller's premises at Unit 19, Kingfisher Park, Collingwood Road, West Moors, Wimborne, Dorstet BH21 6US or such other location as may be advised by the Seller prior to delivery (Delivery Location) within 5 Business Days of the Seller notifying the Buyer that the Goods are ready for collection or if some other place is agreed in writing by both the Seller shall deliver the Goods to that location. If the Seller requires the Buyer to return any packaging materials to the Seller, shall deliver the Goods to that location. If the Seller requires the Buyer to return any packaging materials to the Seller, shall be clearly stated on the delivery note. The Buyer shall make any such packaging materials available for collection at such times as the Seller, that fact will be clearly stated on the delivery note. The Buyer shall make any such packaging materials available for collection at such times as the Seller, that fact will be clearly stated on the delivery note. The Buyer shall be liable for any delay in delivery of the Goods that is caused by a Force Majeure Event or the Buyer's failure to provide the Seller in advance of the quoted delivery delivery any other instructions that are relevant to the supply of the Goods is to be made by the Seller in bulk the Seller reserves the right to deliver by the Seller in advance of the quoted delivery deliver
- 6.6

If the Buyer fails to take delivery or collect the Goods within five Business Days of the Seller notifying the Buyer that the Goods are ready, then, except where such failure

or delay is caused by a Force Majeure Event or the Seller's failure to comply with its obligations under the Contract:
6.7.1 delivery of the Goods shall be deemed to have been completed at 9.00 am on the fifth Business Day after the day on which the Seller notified the Buyer that the

Goods were ready; and

5.3

6.4

6.5

7.3

- 6.7.2 the Seller shall store the Goods until delivery takes place, and charge the Buyer for all related costs and expenses (including insurance).
- If 10 Business Days after the day on which the Seller notified the Buyer that the Goods were ready for delivery the Buyer has not taken delivery of them, the Seller may
- The risk in the Goods shall pass to the Buyer on completion of delivery.

  Title to the Goods shall not pass to the Buyer until the Seller has received payment in full (in cash or cleared funds) for:

- Ittle to the Goods shall not pass to the Buyer utill the seller has received payment in the flat Goods; and 7.2.1 the Goods; and 7.2.2 any other goods or services that the Seller has supplied to the Buyer in respect of which payment has become due. Until title to the Goods has passed to the Buyer, the Buyer shall: 7.3.1 hold the Goods on a fiduciary basis as the Seller's bailee; 7.3.2 store the Goods separately from all other goods held by the Buyer so that they remain readily identifiable as the Seller's property; 7.3.3 not remove, deface or obscure any identifying mark or packaging on or relating to the Goods; 7.3.4 maintain the Goods in satisfactory condition and keep them insured against all risks for their full price from the date of delivery;



or (if there are none) good trade practice regarding the same

8.3.3 the defect arises as a result of the Seller following any drawing, design or Specification supplied by the Buyer; 8.3.4 the Buyer alters or repairs such Goods without the written consent of the Seller; 8.3.5 the defect arises as a result of fair wear and tear, wilful damage, negligence, or abnormal storage or working conditions; 8.3.6 the Goods differ from their description as a result of changes made to ensure they comply with applicable statutory or regulatory requirements; 8.3.7 the Goods are used in an application beyond the Seller's design specification Except as provided in this clause 8, the Seller shall have no liability to the Buyer in respect of the Goods' failure to comply with the warranty set out in clause 8.1. Except as set out in these Conditions, all warranties, conditions and other terms implied by statute or common law are, to the fullest extent permitted by law, excluded from the Contract. These Conditions shall apply to any repaired or replacement Goods supplied by the Seller. LIMITATION OF LIABILITY Nothing in these Conditions shall limit or exclude the Seller's liability for: 9.1.1 death or personal injury caused by its negligence, or the negligence of its employees, agents or subcontractors (as applicable); 9.1.2 fraud or fraudulent misrepresentation; 9.1.3 breach of the terms implied by section 12 of the Sale of Goods Act 1979; 9.1.4 defective products under the Consumer Protection Act 1987 (where applicable); or 9.1.5 any matter in respect of which it would be unlawful for the Seller to exclude or restrict liability. Subject to clause 9.1 the Seller shall under no circumstances whatsoever be liable to the Buyer, whether in contract, tot (including negligence), breach of statutory duty, or otherwise, for any loss of profit, or any indirect or consequential loss arising under or in connection with the Contract. FORCE MAJEURE Neither party shall be liable for any failure or delay in performing its obligations under the Contract to the extent that such failure or delay is caused by a

the Buyer suspends, or threatens to suspend, payment of its debts, or is unable to pay its debts as they fall due or admits inability to pay its debts, or (being a company) is deemed unable to pay its debts within the meaning of section 123 of the Insolvency Act 1986, or (being an individual) is deemed either unable to pay its debts or as having no reasonable prospect of so doing, in either case, within the meaning of section 268 of the Insolvency Act 1986, or (being a partnership) has any partner to whom any of the

(being an individual) the Buyer is the subject of a bankruptcy petition or order; e)  a creditor or encumbrance of the Buyer attaches or takes possession of, or a distress, execution, sequestration or other such process is levied or enforced against, the whole or any part of its assets and such attachment or process is not discharged within 14 days;	any other than	CONTRO
(being a company) an application is made to court, or an order is made, for the appointment of an administrator or if a notice of intention to appoint an administrator is given or if an administrator is appointed over the Buyer;  (being a company) a floating charge holder over the Buyer's assets has become entitled to appoint or has appointed an administrative receiver;  a person becomes entitled to appoint a receiver over the Buyer's assets has become entitled to appoint or has appointed an administrative receiver;  a person becomes entitled to appoint a receiver over the Buyer's asset so ra receiver is appointed over the Buyer's assets;  the Buyer suspends, threatens to suspends, ceases or threatens to cease to carry on all or substantially the whole of its business;  the Buyer's financial position deteriorates to such an extent that in the Seller's opinion the Buyer's capability to adequately fulfil its obligations under the Collaboration of the collaboratio		C4 PORT 3 PORT

11.3 Termination of the Contract, however arising, shall not affect any of the parties' rights and remedies that have accrued as at termination. Clauses which expressly or by implication survive termination of the Contract shall continue in full force and effect. TEST OR INSPECTION OF THE GOODS Where the Contract provides for test and inspection before dispatch and delivery by or on behalf of the Buyer at the Seller's premises the following conditions shall apply: In the event of inspection by the Buyer and/or their servant or agent any complaint in relation to the Goods must be notified to the Seller in writing within seven days of that inspection and in the absence of such notice the Buyer shall be conclusively deemed to have accepted the Goods as being in conformity with the Contract and shall not thereafter be entitled to reject the Goods. Examination of Goods during construction by an external authority where required shall be payable by and at the cost of the Buyer in addition to the ordinary price of the Goods. The Seller reserves the right to charge the Buyer the cost of all test pieces which comply with specification. ASSIGNMENT AND SUBCONTRACTING The Seller may at any time assign, transfer, charge, subcontract or deal in any other manner with all or any of its rights or obligations under the Contract. The Buyer may net assign, transfer, charge, subcontract or deal in any other manner with all or any of its rights or obligations under the Contract without the prior written consent of the Seller. NoTICES Any notice or other communication given to a party under or in connection with the Contract shall be in writing, addressed to that party at its registered office [if it is a company) or its principal place of business (in any other case) or such other address as that party may have specified to the other party in writing in accordance with this clause, and shall be delivered personally, sent by pre-paid first class post, recorded delivery, commercial courier, fax or e-mail. 12.3

14.2 A notice or other communication shall be deemed to have been received: if delivered personally, when left at the address referred to in clause 14.1; if sent by pre-paid first class post or recorded delivery, at 9.00 am on the second Business Day after posting; if delivered by commercial courier, on the date and at the time that the courie delivery receipt is signed; or, if sent by fax or e-mail, one Business Day after transmission.

The provisions of this clause shall not apply to the service of any proceedings or other documents in any legal action.

14.3 if any court or competent authority finds that any provision of the Contract (or part of any provision) is invalid, illegal or unenforceable, that provision or part-provision 15.

shall, to the extent required, be deemed to be deleted, and the validity and enforceability of the other provisions of the Contract shall not be affected.

15.2 If any invalid, unenforceable or illegal provision of the Contract would be valid, enforceable and legal if some part of it were deleted, the provision shall apply with the minimum modification necessary to make it legal, valid and enforceable. WAIVER A waiver of any right or remedy under the Contract is only effective if given in writing wands shall not be deemed a waiver of any subsequent breach or default. No failure or delay by a party to exercise any right or remedy provided under the Contract or by law shall constitute a waiver of that or any other right or remedy, nor shall it preclude or restrict the further exercise of that or any other right or remedy. No single or partial exercise of such right or remedy shall preclude or restrict the further exercise of that or any other right or remedy. No single or to the Contract shall not have any rights under or in connection with it. VARIATION Except as set out in these Conditions, any variation to the Contract, including the introduction of any additional terms and conditions, shall only be binding when agreed in writing and signed by the Buyer and the Seller. GOVERNING LAW AND JURISDICTION The Contract, and any dispute or claim arising out of or in connection with it or its subject matter or formation (including non-contractual disputes of Calcimis), shall be governed by, and construed in accordance with, English law, and the parties irrevocably submit to the exclusive jurisdiction of the courts of England and Wales. 17.

12.4 13. 13.1 13.2

14. 14.1











#### Products & Descriptions

#### Solenoid Valves

We offer direct acting 2 position 3 port solenoid actuated valves Pilot Operated Check Valves for use as pilot valves and for single stage operation. A number of Ourstandard range comprises single and dual pilot operated

or for manifold mounting, and for use with a range of media, including air and other gases, oil, water, water glycol mixes and

#### Stop&MeteringValves

Our range of stop and metering valves can be supplied to suit your installation configuration requirements, including inline, manifold mounted or cartridge types for inclusion in your own control valves are also available, providing a constant flow monel, inconel, hastelloy and titanium. rate in situations where the load or supply pressure varies.

#### 3 Ported Directional Control Valves

The 3B series of 2 position 3 ported directional control valves are available for use on a wide range of media, from gases to sea Ourrange of excess flow valves are designed to meet the exacting switching reliable and consistent. With a vent chamber where excessive flow must be avoided. between the main ports and the pilot system, different pilot and main line fluids may be used without risk of accidental mixing or contamination. Various actuation methods are available, including hydraulic and pneumatic pilots, levers and Filters

#### 4 Ported Directional Control Valves

TheBiS range of 4 port directional valves includes both balanced poppet and rotary shear seal designs, commonly used to give sensitive downstream components, and are particularly designed control of double acting actuators. The '4R' series valves are to protect against rogue pieces of debris that have passed the lever operated 2 or 3 position rotary valves offering 90° manual actuation, in both detented and non-detented configurations, and with a range of centre conditions. They may be used in manufacture. Our SF and DF filters may be used as main line filters many different installations, with standard threaded porting, in the supply line, and offer various features such as bypasses, directly mounted on manifolds, or mounted behind panels. clogging indicators, and for the duplex style filters, on-line When manual control is not required, the '6B' range of 2 servicing. position 4 way valves offer other methods of actuation, such as hydraulic and pneumatic pilots.

#### Check and Shuttle Valves

The BiSrange of inline check valves is a comprehensive range comprising nominal bore sizes from 1/4" to 2". Manufactured from of up to 414 bar (6,000 psi). The product can be used to provide a stainless steel, they are suited to use with a wide range of liquids and gases, with pressures up to 1379 bar (20,000 psi). High cracking pressure check valves are also available by contacting second service rises or falls beyond a pre-set pressure. the factory. In addition, there are cartridge check valves for use in manifolds or for direct integration into other equipment. The 'SV' range of shuttle valves may be selected when it is necessary for a Pumps valve to select the higher of two pressures, a function often used when redundancy of pilot systems is required.

12/14

solenoid thrusters are available, including industrial enclosures, subsea designs and ATEX approved solenoids for use in potentially explosive hazardous areas. Manufactured mostly from potentially explosive hazardous areas. Manufactured designs are tandard ported designs.

#### Relief Valves

We offer a comprehensive range of safety relief and relief valves for use on a wide range of media, from low pressure valves that vent to atmosphere, to high pressure (1379 bar, 20,000 psi) piped return valves. Typically, low pressure valves offer a pop-open style characteristic, while high pressure valves offer proportional or manifold. Stop valves provide a full positive shut-off function, while material valves are CE marked to while metering valves, which are mostly supplied with a denote approval as Category IV safety accessories under the graduated micrometer style adjustment, can be used to 97/23/EC Pressure Equipment Directive. Many options are provide speed control or any other simple orifice function available, including cartridge and manifold mounted versions, where adjustment is required. Pressure compensated flow and many valves are available in exotic materials including

#### Excess Flow Valves

water and many difficult and hazardous chemicals and fluids, standards of the oil & gas and petro-chemical markets. Their Using a balanced poppet design, actuation of these valves is primary function is to shut a line down in the event of breakage or completely independent of the main line pressures, making rupture of a downstream pipe or hose, or any other application

BiSValves offer a wide range of filtration products, ranging from small component protection filters or strainers to full pressure main line filter units. Available with a wide range of mesh ratings, our F and EF series filters can provide vital protection for contaminant main line filtration or were built into the system during

#### Pressure Sensing Valves

The '3SV'series-sensingvalve is configured to provide a lowpressure signal switch, dependent on a separate sensed pressure pilot pressure signal to actuate another valve when the status of a

Our range of low flow piston pumps offer high pressures up to 827 bar (12,000 psi). Designed for use primarily with mineral oil, certain limited use with water glycols is also permitted.

#### Design, Manufacturing, Testing & Quality

#### Design

All Bis Valves products are supported by a team of hydraulic Testing design engineers. As well as making continuous BiSValves has an extensive and growing list of in-house testing improvements to the current range and designing new capability, both for production testing and for qualification products, the team is ready to help you find the right solution work. for your application. Our design service can include making simple modifications to existing valves to make them an This includes hydraulic testing to 2,069 bar (30,000 psi), flew exact match for your requirements, through to development and pressure drop testing, pressure decay and leakage of a complete new valve. Among our most popular product testing. Test mediums include mineral oil, water, various water solutions are hydraulic manifolds where we can incorporate glycols and nitrogen. Our capabilities, which are augmented several valves into a single unit. This improves installation, by external testing when necessary, also include high pressure reducing the number of expensive fittings required, makes gas testing, environmental testing, hyperbaric facilities and servicing easier since pipe work does not have to be shock and vibration testing. removed when a valve needs servicing, and minimises potential leakage points in the system. We can also offer design consultancy services and we have the capability to work with you to design new products and systems, and to develop your existing designs. Contact us for details.








#### Manufacturing

Manufacturing of BiS Valves products is mostly carried out in our own factory near Wimborne, Dorset, where we have AsanISO 9001:2008 company, our objective is to be your demanding low leakage applications that we serve in the and above all, to the quality standards demanded in today's assembly techniques are essential, and are even more personnel into sustaining the standards established by our inconel, hastelloy and titanium.

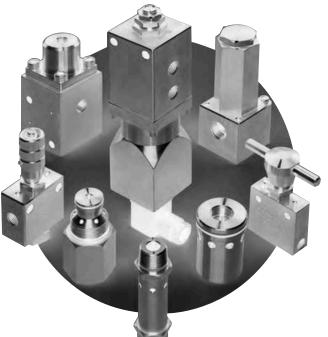

Quality

extensive machining facilities devoted to close tolerance preferred partner and supplier, providing you with product manufacture of stainless steel valve parts. In order to solutions that are engineered to meet your requirements, achieve the high levels of seat integrity required by the delivered on time, with a commitment to through-life support offshore oil and gas industry, sound manufacturing and business arena. We will continue to achieve this by focusing all critical when handling more exotic materials such as monel, quality system and through continuous improvement and innovation in our products, design, manufacturing and business

> At BiS Valves quality is of paramount importance and particular care is taken to ensure all products meet the high standards required and are tested to ultimiately ensure compliance.

Our Quality Assurance Management System approvals

I BS EN ISO 9001:2008 - Quality Systems

I ATEXUDIFFICITIVE OF 4/84 FC potentially explosive atmospheres

I Pressure Equipment Directive 97/23/EC (PED)











